



5

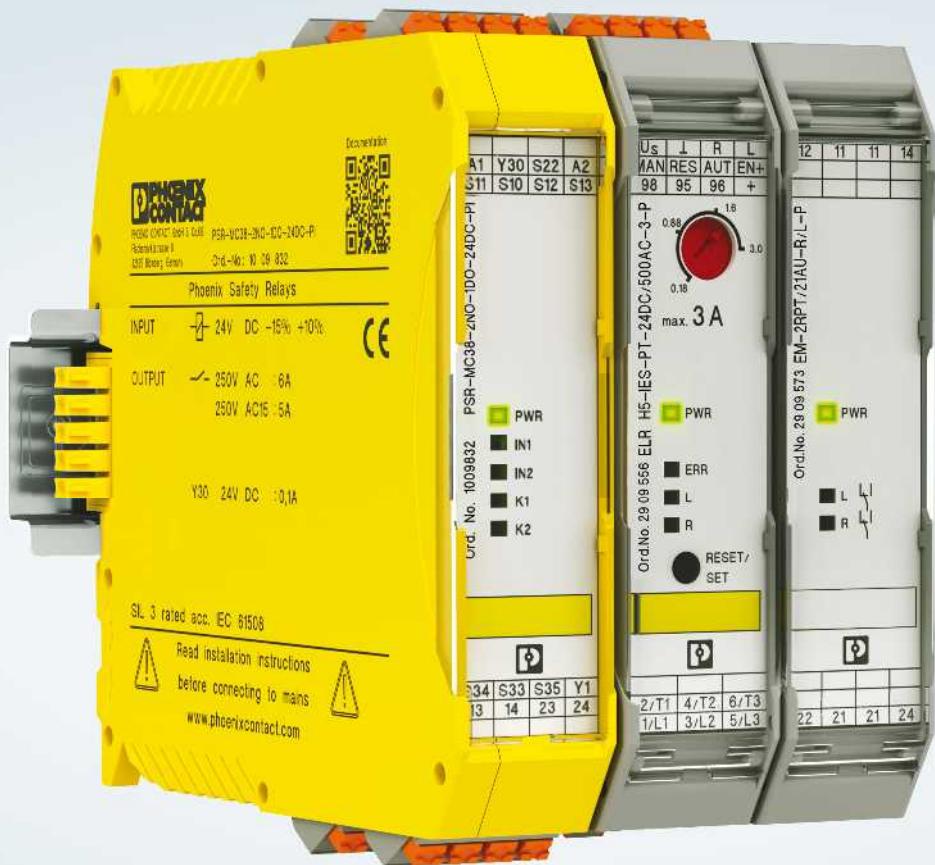

Interface technology and switching devices

2019/2020



Terminal blocks

- Terminal blocks



Interface technology and switching devices

- Electronic switching devices and motor control
- Measurement and control technology
- Monitoring
- Relay modules
- System cabling for controllers



Sensor/actuator cabling and connectors

- Sensor/actuator cabling
- Cables and lines
- Connectors



Automation

- PLCnext Technology
- Industrial cloud computing
- Software
- PLCs and I/O systems
- Functional safety
- Industrial communication technology
- HMIs and industrial PCs
- Lighting and signaling



Marking systems, tools, and mounting material

- Marking and labeling
- Tools
- Installation and mounting material



Charging technology for electromobility

- Charging technology for electromobility



Surge protection, power supplies, and device circuit breakers

- Surge protection and interference suppression filters
- Power supplies and UPS
- Protective devices



PCB terminal blocks and PCB connectors

Use our E-paper for quick product selection.

i Web code: #1517

Find out more with the web code

For detailed information, use the web codes provided in this brochure. Simply enter # and the four-digit number in the search field on our website.

i Web code: #1234 (example)

Or use the direct link:
phoenixcontact.net/webcode/#1234

You will find the latest information including all the new products directly in the product area of our website:

phoenixcontact.net/products

You can also use the Phoenix Contact catalog app interactively on your tablet.





Measurement and control technology

From highly-compact 6 mm signal conditioners and functionally safe signal conditioners to signal isolators for intrinsically safe circuits in the Ex area: our signal conditioner range and process indicators offer a solution for all applications in analog signal conditioning.

Signal conditioners – Your advantages

- Achieve space savings of up to 65% compared to other isolators on the market with these highly compact signal conditioners
- Integrate field signals into industrial networks while also benefiting from safe electrical isolation with signal conditioners with a bus and network connection
- Precise transmission and high operational safety with signal conditioners with consistent SIL certification
- Maximum explosion protection for all Ex zones and gas groups: with single- and two-channel signal isolators for intrinsically safe circuits in the Ex area
- Integrate analog signals easily into the safety chain in accordance with the Machinery Directive: with signal conditioners with Performance Level

Process indicators and field devices – Your advantages

- Display, monitor, and control analog and temperature signals with the multifunctional process displays
- Interference-free transmission of analog signals as well as temperature measurement in the field, thanks to versatile signal conditioners and 2-conductor field devices

Product range overview

Product overview	58
Selection guide for signal conditioners	62
Basics	64
MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology	66
MACX Analog – Signal conditioners with functional safety and explosion protection	112
Multiplexers for HART signals	172
Field Analog – Process indicators and field devices	180

MCR technology

Product overview

Highly compact signal conditioners with plug-in connection technology



MINI Analog Pro

Page 66



MINI Analog Pro gateways

Page 98



System cabling, Termination Carriers

Page 102



Accessories for MINI Analog Pro

Page 106

Multiplexers



Multiplexers for HART signals

Page 172



Accessories for MACX Analog

Page 175



System cabling, Termination Carriers

Page 170



Field Analog

Page 180

Process indicators and field devices

**Signal conditioners
with functional safety**

MACX Analog

Page 116

Ex i signal conditioners with functional safety

MACX Analog

Page 142

Ex
Ex n

Highly compact signal conditioners

Analog IN / Analog OUT		Page
4-way signal conditioners	Universal	68
4-way signal duplicators	Universal	70
4-way supply doublers		78
	Universal	74
3-way signal conditioners	Configurable	72
	Fixed signal combinations	76
3-way repeater power supplies	Single-channel	77
2-way repeater power supplies	Output loop-powered, 1- or 2-channel	79
	Input loop-powered, 1- or 2-channel	80
2-way passive isolators	Output loop-powered, 1- or 2-channel	81
Temperature		
Temperature transducers	For resistance thermometers	82
	For thermocouples	84
Frequency		
Frequency transducers	Universal	86
Analog frequency transducers	Universal	88
Potentiometer/resistor		
Potentiometer measuring transducers	Universal	90
Digital IN		
Signal conditioners	NAMUR sensors, floating contacts	92
Limit values		
Limit value switches	Analog limit values, universal	94
	Temperature, universal	From 96
Bus and network connection		
Gateways	Modbus RTU, PROFIBUS DP	100
	Modbus/TCP	101
Accessories		
Constant voltage/constant current sources		106
Configuration	Programming adapters	111
	System adapters	104
System cabling	Termination Carrier	105
	1:1 feed-through terminal block	110
Supply components	Power terminal, fault signaling modules, DIN rail connector, system power supply	From 108
Marking material		111
Connector sets		107
Shield fast connection		173
Test plugs		177
Resistance circuits	For line fault detection	177



**Process indicators
and field devices**

**Ex i process indicators
and field devices**

Process indicators	Page	Page
Multifunctional process indicators	182	182
Loop-powered process indicators	184	184
Standard signals	186	
Frequency	187	
Setpoint adjusters	188	
Accessories for process indicators	192	192
Temperature transducers		
Temperature head transducers	189	189
Temperature transducers, DIN rail	190	190
Accessories	193	193



Ex n

**Signal conditioners
with functional safety**

Analog IN / Analog OUT		Page
3-way signal conditioners	Configurable	116
	1-channel	120
3-way repeater power supplies	Signal duplicators	From 121
	2-channel	123
2-way passive isolators	Input loop-powered, 1- or 2-channel	124
	Output loop-powered, 1- or 2-channel	125
Temperature		
Temperature transducers	For resistance temperature detectors	From 128
	For thermocouples	132
	Universal	126
Potentiometer / resistor		
Potentiometer measuring transducers	Universal	
Digital IN		
Signal conditioners	NAMUR sensors, floating contacts	134
	Signal duplicators	135
	NAMUR output, floating contacts	136
	NAMUR sensors on NAM	139
Digital OUT		
Solenoid drivers	Loop-powered	
	With line fault detection	
Limit values		
Limit value switches	Analog limit values, configurable	140
	Temperature, universal	



**Ex i signal conditioners
with functional safety**

Page
142
143
144
146
148
150
150
154
158
155
158
156
159
160
166
163
168
152

Glossary/the most important terms related to signal conditioners

Input

Maximum input signal:

Describes the value achieved before any damage occurs to the module.

Input resistance:

A minor input signal load can be achieved with low impedance for current inputs and high impedance for voltage inputs.

Common mode rejection:

Characterizes the suppression of identical signals at the two inputs.

Analog output

Maximum output signal:

During uninterrupted operation, an overload at the input cannot cause greater values than at the output.

Zero/span adjustment:

Zero adjustment = setting the zero point
Span adjustment = adjustment of the analog output compared to the input, increasing/reducing the amplification factor of the output characteristic curve.

Load:

Load capacity at the output; total resistance that can be “driven”.

Residual ripple/ripple:

A superimposed ripple can appear on the output signal due to signal conditioning required by the circuit.

Open-circuit behavior:

If values exceed or fall below a tolerance limit, a defined output signal is sent.

Digital output

In the case of signal conditioners, digital outputs can be realized either using relays or transistor outputs. The switching behavior of the digital outputs can be configured.

Active isolation:

With active isolation, the module has its own power supply. A differentiation is made between three methods of active isolation:

- 3-way isolation
- Input isolation
- Repeater power supply

Passive isolation:

The modules draw the power needed for signal transmission and electrical isolation from an active input or output circuit.

A differentiation is therefore made between

- Input loop-powered
- Output loop-powered

Resistance temperature detector

Resistance temperature detectors (e.g., Pt 100, Ni 1000, etc.) change their resistance value depending on the temperature. They require a constant measurement current. Signal conditioners detect this value and convert it into a proportional analog signal. With regard to the connection technology, a differentiation is made between:

- 2-conductor
- 3-conductor
- 4-conductor

Thermocouples

As opposed to resistance temperature detectors, thermocouples are active sources. They are composed of different metals and generate a voltage that – due to the Seebeck effect – is dependent on the ambient temperature.

Refer to the user manual for detailed information on the principles of MCR technology. It includes explanations on technical and physical fundamentals, application cases, and circuits. Moreover, the user manual provides information on the basic elements of functional safety, digital fieldbus systems, and an introduction into surge protection in MCR technology.

The user manual is available for download free of charge:

https://www.phoenixcontact.com/assets/downloads_ed/global/web_dwl_promotion/52007057_EN_MCR_technology_User_manual.pdf

Order No.: 105238

Non-intrinsically-safe signal transmission in potentially explosive areas

Electrical equipment operated in systems with potentially explosive areas is subject to different requirements, depending on the application. Signal conditioners and measuring transducers are generally deployed in the safe area (non-potentially explosive area). In a housing with degree of protection IP54 that is suitable for zone 2, it is also possible to install the signal conditioners and measuring transducers in a zone 2 Ex area. If enclosed in a pressure-tight encapsulated housing with type of protection Ex d, they can also be used in Ex zone 1. The respective stipulations of the corresponding type of protection and the Ex zone must be taken into consideration at all times.

The figure shows a range of options for installing electrical devices in areas with a danger of gas explosions.

Example: A sensor/actuator with type of protection "n" can be connected to an isolator from the MINI Analog Pro or MACX Analog families in zone 2.




Ex n stands for type of protection n. In this case, it pertains to "non-sparking equipment", that at no time represents a source of ignition due to hot surfaces or electrically or mechanically generated sparks.

See our free brochure for detailed information on the topic of explosion protection:

https://www.phoenixcontact.com/assets/downloads_ed/global/web_dwl_promotion/5149416_EN_HQ_Explosion_protection_LoRes.pdf

Order No.: 5149416



Installation of electrical devices for signal transmission

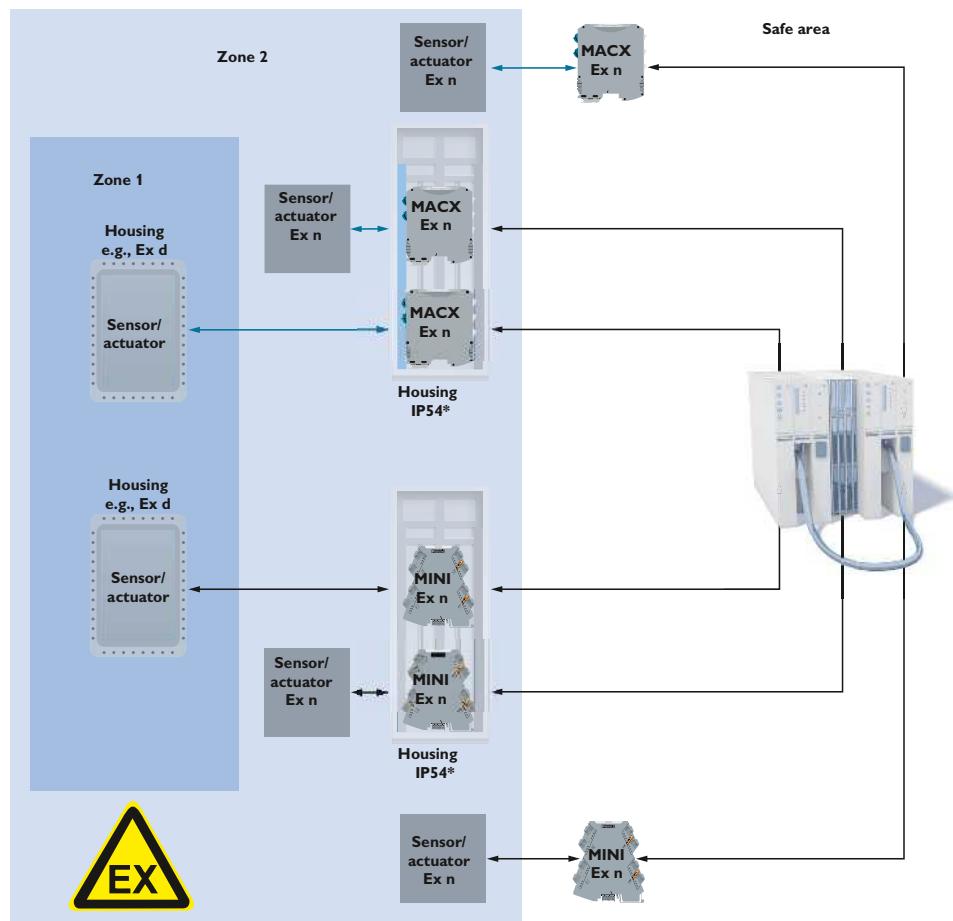

*Use of suitable housings approved for use in zone 2

MCR technology

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

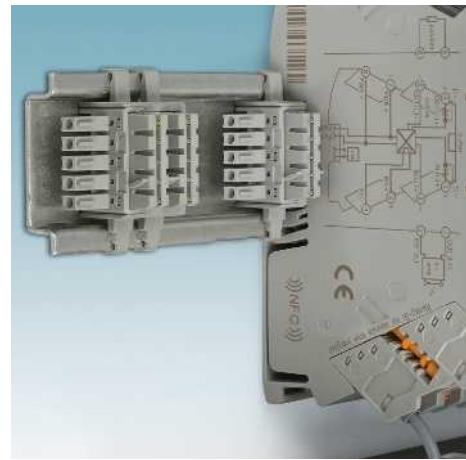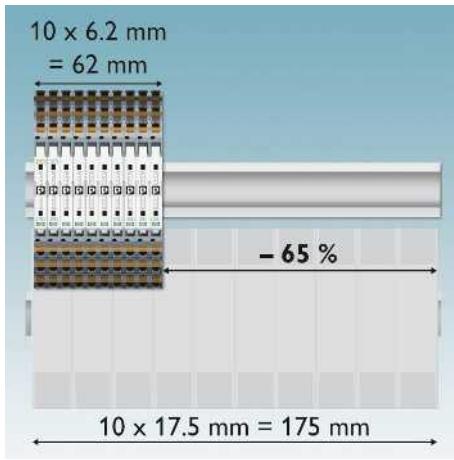

Easier than ever but as slim as before

MINI Analog Pro offers you the easiest installation and startup in confined spaces.
– Space savings of up to 65%

Select from the following categories

- Analog IN/OUT
- Temperature
- Frequency
- Potentiometers
- Digital IN
- Limit values
- Accessories

Easy installation

– Easily visible and accessible terminal points and FASTCON Pro pluggable connection terminal blocks

Power bridging and fault monitoring

– The DIN rail connector simplifies supply and enables remote diagnostics by means of group error monitoring



DIN-rail-connector-compatible

The DIN rail connector enables modular bridging of the 24 V supply voltage.

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology**Measure current signals during operation**

Measure signals conveniently for startup and servicing during operation, thanks to integrated measurement diodes.

- It is not necessary to break the circuit to integrate the measuring device into the signal circuit
- By setting the connector to the disconnect position, signal circuits can be easily interrupted during servicing and startup

**Numerous configuration options**

- Via DIP, PC or smartphone app

App functions via NFC communication



Access to information

- Access module information




DIP switch setting help

- Access module information
- Display DIP switch setting help on your smartphone




Configuration via smartphone

- Via Bluetooth or NFC
- Access module information
- Display DIP switch setting help
- Wireless configuration via smartphone

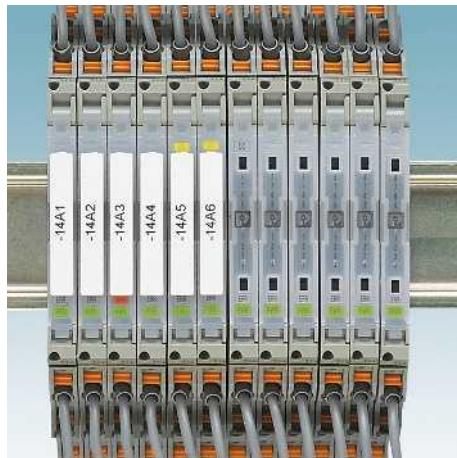**Service-friendly**


- Generous marking areas for complete loop identification using standard marking materials as well as permanently visible status LEDs on each module

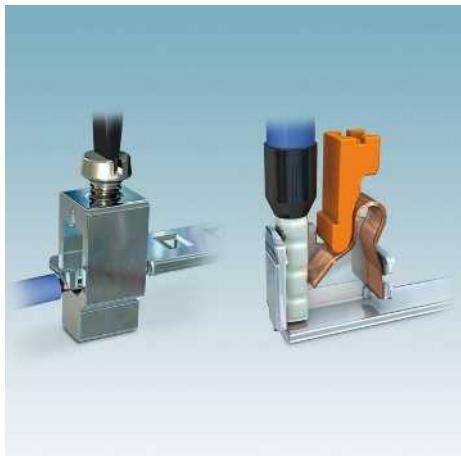**Choice of connection technology**

- Wiring with screw connection or fast and tool-free with Push-in connection technology

**Optimum signal quality**

- The latest transmission technology and safe electrical isolation between input, output, and power supply with 3 kV test voltage

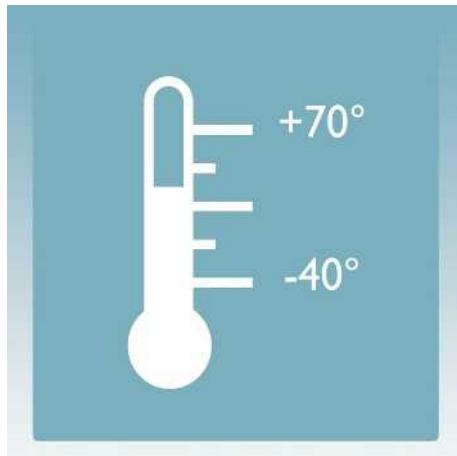**Suitable for any application**

- Extended supply voltage and temperature range as well as multifunctional device types



The following parameters are generally valid for all MINI Analog Pro modules:

Test voltage input/output/power supply
Ambient temperature (operation)
Dimensions (W / H / D)
Push-in connection rigid / flexible / AWG
Screw connection rigid / flexible / AWG
Housing material
Mounting

3 kV (50 Hz, 1 min.)
-40°C ... 70°C
6.2 / 110.5 / 120.5 mm
0.14 ... 2.5 mm² / 0.14 ... 2.5 mm² / 24 - 12
0.2 ... 1.5 mm² / 0.2 ... 1.5 mm² / 24 - 12
PBT
Any

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

Analog IN/Analog OUT 4-way signal conditioners

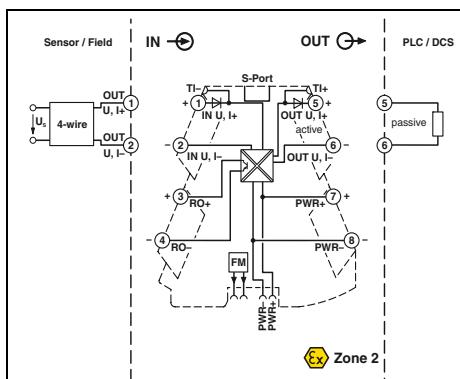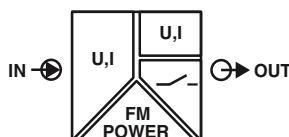

Universal 4-way signal conditioner with switching output, configurable



Ex: Ex d

Housing width 6.2 mm

Technical data

Input data

Input signal (configurable via DIP switch or freely via software)

U input

0 V ... 10 V	0 mA ... 20 mA
2 V ... 10 V	4 mA ... 20 mA
0 V ... 5 V	0 mA ... 10 mA
1 V ... 5 V	2 mA ... 10 mA
10 V ... 0 V	20 mA ... 0 mA
10 V ... 2 V	20 mA ... 4 mA
5 V ... 0 V	10 mA ... 0 mA
5 V ... 1 V	10 mA ... 2 mA
0 V ... 12 V	0 mA ... 24 mA
>120 kΩ	Approx. 50 Ω (+ 0.7 V for test diode)

I input

0 V ... 10 V	0 mA ... 20 mA
2 V ... 10 V	4 mA ... 20 mA
0 V ... 5 V	0 mA ... 10 mA
1 V ... 5 V	2 mA ... 10 mA
0 V ... 10.5 V	0 mA ... 21 mA
Approx. 12.3 V	24.6 mA
≥10 kΩ	≤600 Ω (at 20 mA)
<20 mV _{PP} (at 600 Ω)	<20 mV _{PP} (at 600 Ω)

Input resistance

Output data

Output signal (configurable via DIP switch or freely via software)

U output

0 V ... 10 V	0 mA ... 20 mA
2 V ... 10 V	4 mA ... 20 mA
0 V ... 5 V	0 mA ... 10 mA
1 V ... 5 V	2 mA ... 10 mA
0 V ... 10.5 V	0 mA ... 21 mA
Approx. 12.3 V	24.6 mA
≥10 kΩ	≤600 Ω (at 20 mA)
<20 mV _{PP} (at 600 Ω)	<20 mV _{PP} (at 600 Ω)

I output

Maximum output signal

Load R_B

Ripple

Switching output

Relay output

Max. switching voltage

Maximum switching current

U output

I output

General data

Supply voltage range

Nominal supply voltage

Current consumption

Power consumption

U output

I output

Maximum transmission error

Temperature coefficient

Step response (10-90%)

U output

I output

Electrical isolation

Conformance/approvals

Conformance

ATEX

UL, USA/Canada

CE-compliant

II 3 G Ex nA IIC T4 Gc X

UL 508 Listed

Class I, Div. 2, Groups A, B, C, D T6

Class I, Zone 2, Group IIC T6

B, B, A, A

DNV GL

Ordering data

Description

Type

Order No.

Pcs./Pkt.

4-way signal conditioner with switching output, for electrical isolation of analog signals

Standard configuration	Push-in connection
Standard configuration	Screw connection
Order configuration	Push-in connection
Order configuration	Screw connection

MINI MCR-2-UNI-UI-UIRO-PT	2902028	1
MINI MCR-2-UNI-UI-UIRO	2902026	1
MINI MCR-2-UNI-UI-UIRO-PT-C	2902027	1
MINI MCR-2-UNI-UI-UIRO-C	2902024	1

Accessories

Programming adapter for configuring modules with S-PORT interface

IFS-USB-PROG-ADAPTER

2811271

1

USB programming adapter for configuring modules with Windows software

TWN4 MIFARE NFC USB ADAPTER

2909681

1

Bluetooth programming adapter, with USB and S-PORT interface

IFS-BT-PROG-ADAPTER

2905872

1

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

Order key for MINI MCR-2-UNI-UI-UIRO(-PT)(-C) 4-way signal conditioners (standard configuration entered as an example)

Order No.	Input	Output	Measuring range limit	Cut-off frequency				
	Input signal	Start	End					
			Start	End				
2902024	I I ≈ I U ≈ U	0.0 0.0 ≈ 0 mA I: freely selectable between 0.0 ... 24 mA U: freely selectable between 0.0 ... 12 V	20.0 20.0 ≈ 20 mA I: freely selectable between 0.0 ... 24 mA U: freely selectable between 0.0 ... 12 V	I I ≈ I U ≈ U	0.0 0.0 ≈ 0 mA I: freely selectable between 0.0 ... 21 mA U: freely selectable between 0.0 ... 10.5 V	20.0 20.0 ≈ 20 mA I: freely selectable between 0.0 ... 21 mA U: freely selectable between 0.0 ... 10.5 V	0 0 ≈ OFF 1 ≈ AN	15 15 ≈ 15 Hz 60 ≈ 60 Hz
2902024 ≈ MINI MCR-2-UNI-UI-UIRO-C								
2902027 ≈ MINI MCR-2-UNI-UI-UIRO-PT-C								

Measuring range span at least 0.5 V / 1 mA
Increment 0.1 V / 0.1 mA

Output signal span at least 0.5 V / 1 mA
Increment 0.1 V / 0.1 mA

Failure information

Behavior in the event of an error

Open circuit / short circuit

Measuring value over-range




Measured value under-range

... / NE43DO	0.0 0.0 ≈ 0 mA I: freely selectable between 0.0 ... 21.5 mA U: freely selectable between 0.0 ... 11 V (free definition only for unlimited output) (signal type corresponds to selected output signal)	0.0 0.0 ≈ 0 mA I: freely selectable between 0.0 ... 21.5 mA U: freely selectable between 0.0 ... 11 V (free definition only for unlimited output) (signal type corresponds to selected output signal)	0.0 0.0 ≈ 0 mA I: freely selectable between 0.0 ... 21.5 mA U: freely selectable between 0.0 ... 11 V (free definition only for unlimited output) (signal type corresponds to selected output signal)
Note: Failure information in accordance with NE 43 can only be selected for 4 ... 20 mA output			
NE43UP ≈ NE 43 upscale NE43DO ≈ NE 43 downscale NE430 ≈ NE 43 0 mA NE43UD ≈ NE 43 upscale/downscale	21.5 mA 3.5 mA 0 mA 3.5 mA	21.5 mA 3.5 mA 0 mA 21.5 mA	21.5 mA 3.5 mA 0 mA 21.5 mA

MCR technology

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

Analog IN/Analog OUT 4-way signal duplicators

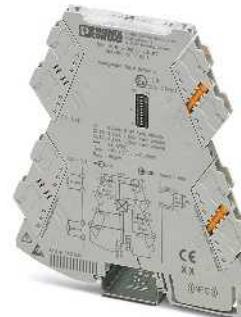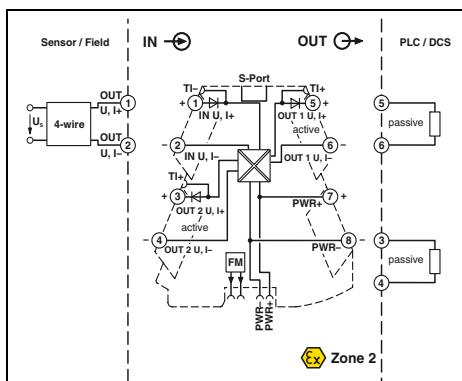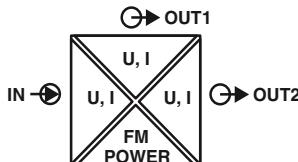

4-way signal duplicator



Housing width 6.2 mm

Technical data

- Universally configurable, highly-compact 4-way signal duplicator
- For electrical isolation, conversion, amplification, and filtering of standard signals
- Independently adjustable outputs
- Input side for current signals from 0 to 24 mA or voltage signals from 0 to 12 V
- Supports fault monitoring
- Plug-in connection system
- Safe 4-way isolation
- Standard behavior can be configured via DIP switches
- Freely configurable via software or smartphone app
- Power supply and fault monitoring possible via DIN rail connector
- Status and error indicator LEDs

Notes:

To order a product with an order configuration, enter the required configuration by referring to the adjacent order key.

Input data

Input signal (configurable via DIP switch or freely via software)

Maximum input signal

Input resistance

Output data

Output signal (configurable via DIP switch or freely via software)

Maximum output signal

No-load voltage

Short-circuit current

Load R_B

Ripple

General data

Supply voltage range

Nominal supply voltage

Current consumption

Power consumption

Maximum transmission error

Temperature coefficient

Step response (10-90%)

Electrical isolation

Degree of protection

EMC note

Conformance/approvals

Conformance

ATEX

UL, USA/Canada

DNV GL

U input

0 V ... 10 V

2 V ... 10 V

0 V ... 5 V

1 V ... 5 V

0 V ... 12 V

12 V

>120 kΩ

Approx. 50 Ω (+ 0.7 V for test diode)

I input

0 mA ... 20 mA

4 mA ... 20 mA

0 mA ... 10 mA

20 mA ... 0 mA

0 mA ... 24 mA

24 mA

≤18.5 V

≤25 mA

≥10 kΩ

<20 mV_{PP} (at 600 Ω)

<20 mV_{PP} (at 600 Ω)

U output

9.6 V DC ... 30 V DC

24 V DC

55 mA (24 V DC)

110 mA (12 V DC)
1.5 W (at $I_{OUT} = 20 \text{ mA}$, 9.6 V DC, 600 Ω load)

I output

0 mA ... 20 mA

4 mA ... 20 mA

0 mA ... 10 mA

20 mA ... 0 mA

0 mA ... 21 mA

24.6 mA

≤18.5 V

0.05% (of final value)

0.01%/K

Approx. 140 ms (15 Hz sample rate)

Approx. 45 ms (60 Hz sample rate)

Approx. 25 ms (240 Hz sample rate)

Reinforced insulation in accordance with IEC 61010-1

IP20

Class A product, see page 583

CE-compliant

II 3 G Ex nA IIC T4 Gc X

UL 508 Listed

Class I, Div. 2, Groups A, B, C, D T6

Class I, Zone 2, Group IIC T6

B, B, A, A

Ordering data

Description	Type	Order No.	Pcs./Pkt.
4-way signal duplicator, with independently adjustable outputs			
Standard configuration	Push-in connection	MINI MCR-2-UNI-UI-2UI-PT	2905028
Standard configuration	Screw connection	MINI MCR-2-UNI-UI-2UI	2905026
Order configuration	Push-in connection	MINI MCR-2-UNI-UI-2UI-PT-C	2905027
Order configuration	Screw connection	MINI MCR-2-UNI-UI-2UI-C	2905025

Accessories

Programming adapter for configuring modules with S-PORT interface	IFS-USB-PROG-ADAPTER	2811271	1
USB programming adapter for configuring modules with Windows software	TWN4 MIFARE NFC USB ADAPTER	2909681	1
Bluetooth programming adapter, with USB and S-PORT interface	IFS-BT-PROG-ADAPTER	2905872	1

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

Order key for MINI MCR-2-UNI-UI-2UI(-PT)(-C) 4-way signal duplicators (standard configuration entered as an example)

Order No.	Input			Output 1			Output 2		
	Input signal	Start	End	Output signal 1	Start	End	Output signal 2	Start	End
2905027	I	0.0	20.0	I	0.0	20.0	I	0.0	20.0
2905025 ≈ MINI MCR-2- UNI-UI-2UI-C	I ≡ I U ≡ U	0.0 ≈ 0 mA I: freely selectable between 0.0 ... 23.5 mA	20.0 ≈ 20 mA I: freely selectable between 0.0 ... 24 mA	I ≡ I U ≡ U	0.0 ≈ 0 mA I: freely selectable between 0.0 ... 20 mA	20.0 ≈ 20 mA I: freely selectable between 1.0 ... 21 mA	I ≡ I U ≡ U	0.0 ≈ 0 mA I: freely selectable between 0.0 ... 20 mA	20.0 ≈ 20 mA I: freely selectable between 1.0 ... 21 mA
2905027 ≈ MINI MCR-2- UNI-UI-2UI-PT-C		U: freely selectable between 0.0 ... 11.5 V	U: freely selectable between 0.5 ... 12 V		U: freely selectable between 0.0 ... 10.5 V	U: freely selectable between 0.5 ... 11 V		U: freely selectable between 0.0 ... 10.5 V	U: freely selectable between 0.5 ... 11 V



Measuring range span at least 0.5 V / 1 mA
Increment 0.1 V / 0.1 mA

Output signal span at least 0.5 V / 1 mA
Increment 0.1 V / 0.1 mA

Sample rate	Factory calibration certificate
... / 15	None None ≈ no factory calibration certificate Yes ≈ certificate but no test data YesPlus ≈ certificate with test data

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

Analog IN/Analog OUT 3-way signal conditioners

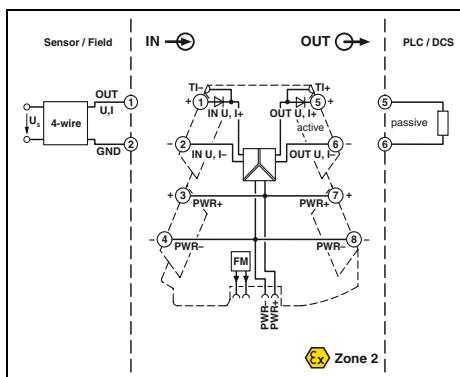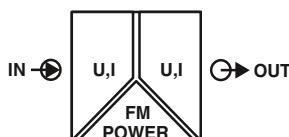

Ex n



**3-way signal conditioner for standard signals,
configurable**



Ex: ATEX IECEx

Housing width 6.2 mm

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

158

159

160

161

162

163

164

165

166

167

168

169

170

171

172

173

174

175

176

177

178

179

180

181

182

183

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200

201

202

203

204

205

206

207

208

209

210

211

212

213

214

215

216

217

218

219

220

221

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

242

243

244

245

246

247

248

249

250

251

252

253

254

255

256

257

258

259

260

261

262

263

264

265

266

267

268

269

270

271

272

273

274

275

276

277

278

279

280

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

Order key for MINI MCR-2-UI-UI(-PT)(-C) 3-way signal conditioners (standard configuration entered as an example)




Order No.	Input	Output	Cut-off frequency
2902036	IN03	OUT01	5K
2902036 ≈ MINI MCR-2-UI-UI-C	IN 01 ≈ 0 ... 20 mA IN 02 ≈ 4 ... 20 mA IN 03 ≈ 0 ... 10 V IN 04 ≈ 2 ... 10 V IN 05 ≈ 0 ... 5 V IN 06 ≈ 1 ... 5 V IN 21 ≈ -5 ... 5 V IN 22 ≈ -10 ... 10 V IN 23 ≈ -20 ... 20 V IN 32 ≈ 0 ... 20 V IN 35 ≈ -20 ... 20 mA IN 38 ≈ 0 ... 24 V IN 39 ≈ 0 ... 30 V IN 80 ≈ -30 ... 30 V IN 93 ≈ -24 ... 24 V IN 94 ≈ 4.8 ... 24 V IN 95 ≈ 6 ... 30 V IN 96 ≈ 4 ... 20 V	OUT 01 ≈ 0 ... 20 mA OUT 02 ≈ 4 ... 20 mA OUT 03 ≈ 0 ... 10 V OUT 04 ≈ 2 ... 10 V OUT 05 ≈ 0 ... 5 V OUT 06 ≈ 1 ... 5 V OUT 13 ≈ -5 ... 5 V OUT 14 ≈ -10 ... 10 V	30 Hz 5 kHz
2902039 ≈ MINI MCR-2-UI-UI-PT-C			

Signal combinations for MINI MCR-2-U-UI(-PT)(-C) signal conditioners

Input	Output							
	0 ... 20 mA	4 ... 20 mA	0 ... 5 V	1 ... 5 V	-5 ... 5 V	0 ... 10 V	2 ... 10 V	-10 ... 10 V
0 ... 20 mA	X	X	X	X	X	X	X	X
4 ... 20 mA	X	X	X	X	X	X	X	X
-20 ... 20 mA	X	X	X	X	X	X	X	X
0 ... 5 V	X	X	X	X	X	X	X	X
1 ... 5 V	X	X	X	X	X	X	X	X
-5 ... 5 V	X	X	X	X	X	X	X	X
0 ... 10 V	X	X	X	X	X	X	X	X
2 ... 10 V	X	X	X	X	X	X	X	X
-10 ... 10 V	X	X	X	X	X	X	X	X
0 ... 20 V	X	X	X	X	X	X	X	X
4 ... 20 V	X	X	X	X	X	X	X	X
-20 ... 20 V	X	X	X	X	X	X	X	X
0 ... 24 V	X	X	X	X	X	X	X	X
4.8 ... 24 V	X	X	X	X	X	X	X	X
-24 ... 24 V	X	X	X	X	X	X	X	X
0 ... 30 V	X	X	X	X	X	X	X	X
6 ... 30 V	X	X	X	X	X	X	X	X
-30 ... 30 V	X	X	X	X	X	X	X	X

Analog IN/Analog OUT 3-way signal conditioners

new

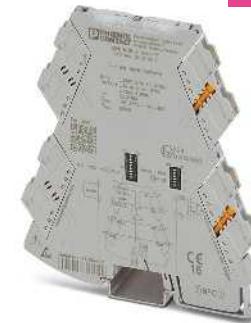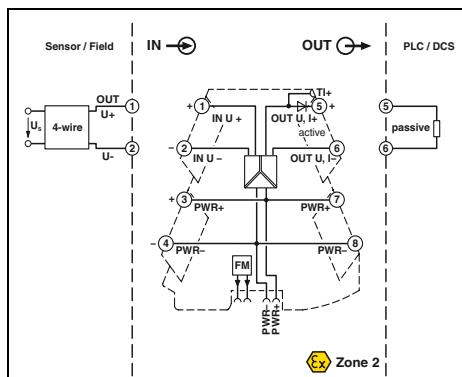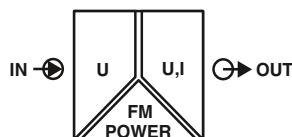

**3-way signal conditioner for standard signals,
configurable**

Housing width 6.2 mm

Technical data

- Configurable 3-way signal conditioner with plug-in connection technology
- Input and output signal range configurable via DIP switches
- Input signal range from ± 50 mV to ± 30 V
- Bipolar input/output signals
- Calibrated measuring range switch-over
- Approval for Ex zone 2 (nA)
- Screw or Push-in connection
- Reinforced insulation in accordance with IEC 61010-1
- Supply voltage range of 9.6 V ... 30 V DC

Notes:

Information on MINI Analog Pro accessories can be found from page 107

To order a product with an order configuration, please enter the desired configuration by referring to the order key.

Input data

Input signal (configurable using the DIP switch)

Input resistance

Output data

Output signal (configurable using the DIP switch)

Maximum output signal

No-load voltage

Short-circuit current

Load R_B

Ripple

General data

Supply voltage range

Nominal supply voltage

Current consumption

Power consumption

Maximum transmission error

Temperature coefficient

Limit frequency (3 dB)

Step response (10-90%)

Electrical isolation

Degree of protection

Conformance/approvals

Conformance

ATEX

UL, USA/Canada

DNV GL

See table

>10 k Ω

I output

0 V ... 5 V

1 V ... 5 V

-5 V ... 5 V

0 V ... 10 V

2 V ... 10 V

-10 V ... 10 V

22 mA

<17 V

<32 mA

≥ 10 k Ω

< 20 mV_{PP} (at 600 Ω)

≤ 600 Ω (at 20 mA)

< 20 mV_{PP} (at 600 Ω)

I output

9.6 V DC ... 30 V DC

24 V DC

25 mA (current output,
at 24 V DC incl. load)

54 mA (current output,
at 12 V DC incl. load)

≤ 800 mW (at $I_{OUT} = 20$ mA,
9.6 V DC, 600 Ω load)

$\leq 0.1\%$ (of final value)

0.01%/K

30 Hz (via DIP switch)

<8.5 ms (with 30 Hz filter)

Reinforced insulation in accordance with IEC 61010-1

IP20

CE-compliant

Ex II 3 G Ex nA IIC T4 Gc X

UL 508 Listed

Class I, Div. 2, Groups A, B, C, D T6

Class I, Zone 2, Group IIC T6

-

Ordering data

Description	Type	Order No.	Pcs./Pkt.
Standard configuration	Push-in connection	MINI MCR-2-U-UI-PT	2902021
Standard configuration	Screw connection	MINI MCR-2-U-UI	2902019
Order configuration	Push-in connection	MINI MCR-2-U-UI-PT-C	2902020
Order configuration	Screw connection	MINI MCR-2-U-UI-C	2902018

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

Order key for MINI MCR-2-U-UI(-PT)(-C) 3-way signal conditioners (standard configuration entered as an example)

Order No. Input Output Cut-off frequency

2902018	IN03	OUT01	5K	
2902018 ≈ MINI MCR-2-U-UI-C	IN40 ≈ 0 ... 50 mV IN53 ≈ ±50 mV IN24 ≈ 0 ... 60 mV IN13 ≈ ±60 mV IN41 ≈ 0 ... 75 mV IN54 ≈ ±75 mV IN42 ≈ 0 ... 80 mV IN55 ≈ ±80 mV IN25 ≈ 0 ... 100 mV IN14 ≈ ±100 mV IN43 ≈ 0 ... 120 mV IN56 ≈ ±120 mV IN44 ≈ 0 ... 150 mV IN57 ≈ ±150 mV IN26 ≈ 0 ... 200 mV IN15 ≈ ±200 mV IN45 ≈ 0 ... 240 mV IN58 ≈ ±240 mV IN27 ≈ 0 ... 300 mV IN16 ≈ ±300 mV IN28 ≈ 0 ... 500 mV IN17 ≈ ±500 mV IN46 ≈ 0 ... 600 mV IN59 ≈ ±600 mV IN47 ≈ 0 ... 750 mV IN60 ≈ ±750 mV IN48 ≈ 0 ... 800 mV IN61 ≈ ±800 mV	IN29 ≈ 0 ... 1 V IN18 ≈ ±1 V IN49 ≈ 0 ... 1.2 V IN62 ≈ ±1.2 V IN19 ≈ ±2 V IN51 ≈ 0 ... 2.4 V IN64 ≈ ±2.4 V IN52 ≈ 0 ... 3 V IN65 ≈ ±3 V IN05 ≈ 0 ... 5 V IN21 ≈ ±5 V IN100 ≈ 0 ... 7.5 V IN107 ≈ ±7.5 V IN03 ≈ 0 ... 10 V IN22 ≈ ±10 V IN101 ≈ 0 ... 12 V IN108 ≈ ±12 V IN67 ≈ 0 ... 15 V IN79 ≈ ±15 V IN32 ≈ 0 ... 20 V IN23 ≈ ±20 V IN38 ≈ 0 ... 24 V IN93 ≈ ±24 V IN39 ≈ 0 ... 30 V IN80 ≈ ±30 V	OUT 01 ≈ 0 ... 20 mA OUT 02 ≈ 4 ... 20 mA OUT 03 ≈ 0 ... 10 V OUT 04 ≈ 2 ... 10 V OUT 05 ≈ 0 ... 5 V OUT 06 ≈ 1 ... 5 V OUT 13 ≈ -5 ... 5 V OUT 14 ≈ -10 ... 10 V	30 Hz 5 kHz

Signal combinations for MINI MCR-2-U-UI(-PT)(-C) signal conditioners



Input	Output							
	0 ... 20 mA	4 ... 20 mA	0 ... 5 V	1 ... 5 V	-5 ... 5 V	0 ... 10 V	2 ... 10 V	-10 ... 10 V
0 ... 50 mV (±50 mV)	X	X	X	X	X	X	X	X
0 ... 60 mV (±60 mV)	X	X	X	X	X	X	X	X
0 ... 75 mV (±75 mV)	X	X	X	X	X	X	X	X
0 ... 80 mV (±80 mV)	X	X	X	X	X	X	X	X
0 ... 100 mV (±100 mV)	X	X	X	X	X	X	X	X
0 ... 120 mV (±120 mV)	X	X	X	X	X	X	X	X
0 ... 150 mV (±150 mV)	X	X	X	X	X	X	X	X
0 ... 200 mV (±200 mV)	X	X	X	X	X	X	X	X
0 ... 240 mV (±240 mV)	X	X	X	X	X	X	X	X
0 ... 300 mV (±300 mV)	X	X	X	X	X	X	X	X
0 ... 500 mV (±500 mV)	X	X	X	X	X	X	X	X
0 ... 600 mV (±600 mV)	X	X	X	X	X	X	X	X
0 ... 750 mV (±750 mV)	X	X	X	X	X	X	X	X
0 ... 800 mV (±800 mV)	X	X	X	X	X	X	X	X
0 ... 1 V (±1 V)	X	X	X	X	X	X	X	X
0 ... 1.2 V (±1.2 V)	X	X	X	X	X	X	X	X
0 ... 1.5 V (±1.5 V)	X	X	X	X	X	X	X	X
0 ... 2 V (±2 V)	X	X	X	X	X	X	X	X
0 ... 2.4 V (±2.4 V)	X	X	X	X	X	X	X	X
0 ... 3 V (±3 V)	X	X	X	X	X	X	X	X
0 ... 5 V (±5 V)	X	X	X	X	X	X	X	X
0 ... 7.5 V (±7.5 V)	X	X	X	X	X	X	X	X
0 ... 10 V (±10 V)	X	X	X	X	X	X	X	X
0 ... 12 V (±12 V)	X	X	X	X	X	X	X	X
0 ... 15 V (±15 V)	X	X	X	X	X	X	X	X
0 ... 20 V (±20 V)	X	X	X	X	X	X	X	X
0 ... 24 V (±24 V)	X	X	X	X	X	X	X	X
0 ... 30 V (±30 V)	X	X	X	X	X	X	X	X

Unipolar or bipolar selection option available for input signal via DIP switch.

MCR technology

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

Analog IN/Analog OUT 3-way signal conditioners

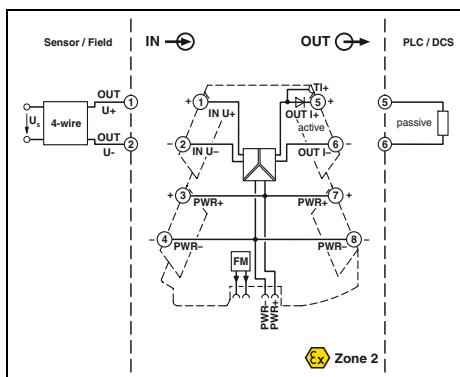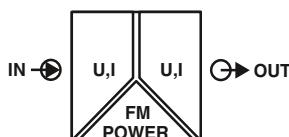

3-way signal conditioner
with fixed signal combinations

Ex:

- Highly compact signal conditioners for electrical isolation, conversion, amplification, and filtering of standard analog signals
- Fixed signal combinations
- Plug-in connection system
- Safe 3-way isolation
- Power supply and fault monitoring possible via DIN rail connector
- Status LED

Notes:

Information on MINI Analog Pro accessories can be found from page 107

Technical data



Input data	U input	I input
Input resistance	Approx. 1 MΩ	Approx. 63 Ω (+ 0.7 V for test diode)
Output data	U output	I output
Maximum output signal	11 V	22 mA
No-load voltage	<15 mA	<17 V
Short-circuit current	≥10 kΩ	≤600 Ω (at 20 mA)
Load R _B	<20 mV _{PP} (at 10 kΩ)	<20 mV _{PP} (at 600 Ω)
Ripple		
General data		
Supply voltage U _B	9.6 V DC ... 30 V DC	
Nominal supply voltage	24 V DC	
Typ. current consumption	25 mA (24 V DC)	
Maximum transmission error	0.1% (of final value)	
Temperature coefficient	0.01%/K, typically 0.01%/K	
Limit frequency (3 dB)	Approx. 30 Hz	
Step response (10-90%)	Approx. 10 ms	
Degree of protection	IP20	
Electrical isolation	Reinforced insulation in accordance with IEC 61010-1	
EMC note	Class A product, see page 583	
Conformance/approvals		
Conformance	CE-compliant	
ATEX		
UL, USA/Canada	UL 508 Listed	
DNV GL	Class I, Div. 2, Groups A, B, C, D T6	
	Class I, Zone 2, Group IIC T6	
	C, EMC2	

Ordering data

Description	Input signal	Output signal	Type	Order No.	Pcs./Pkt.
3-way signal conditioner, for electrical isolation of analog signals					
Push-in connection	0 ... 10 V	0 ... 20 mA	MINI MCR-2-U-I0-PT	2902023	1
Screw connection	0 ... 10 V	0 ... 20 mA	MINI MCR-2-U-I0	2902022	1
Push-in connection	0 ... 10 V	4 ... 20 mA	MINI MCR-2-U-I4-PT	2902030	1
Screw connection	0 ... 10 V	4 ... 20 mA	MINI MCR-2-U-I4	2902029	1
Push-in connection	0 ... 20 mA	0 ... 10 V	MINI MCR-2-I0-U-PT	2902001	1
Screw connection	0 ... 20 mA	0 ... 10 V	MINI MCR-2-I0-U	2902000	1
Push-in connection	4 ... 20 mA	0 ... 10 V	MINI MCR-2-I4-U-PT	2902003	1
Screw connection	4 ... 20 mA	0 ... 10 V	MINI MCR-2-I4-U	2902002	1
Push-in connection	0 ... 20 mA	0 ... 20 mA	MINI MCR-2-I-I-PT	2901999	1
Screw connection	0 ... 20 mA	0 ... 20 mA	MINI MCR-2-I-I	2901998	1
Push-in connection	0 ... 10 V -10 ... 10 V	0 ... 10 V -10 ... 10 V	MINI MCR-2-U-U-PT	2902043	1
Screw connection	0 ... 10 V -10 ... 10 V	0 ... 10 V -10 ... 10 V	MINI MCR-2-U-U	2902042	1

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

Analog IN/Analog OUT 3-way repeater power supplies

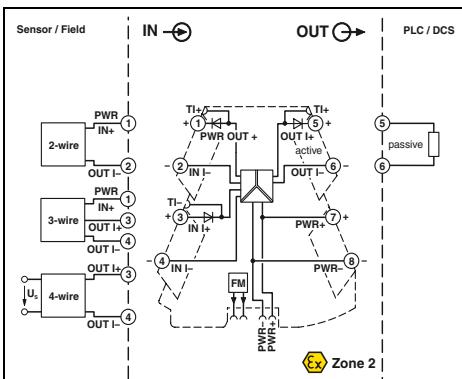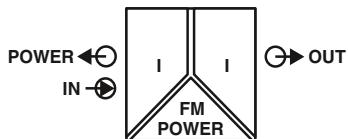

3-way repeater power supply



Housing width 6.2 mm

Technical data



Input data	0 ... 20 mA, isolator operation / 4 ... 20 mA, repeater power supply and isolator operation
Input signal	Approx. 68 Ω (+ 0.7 V for test diode)
Input resistance	>19.5 V
Transmitter supply voltage	0 ... 20 mA / 4 ... 20 mA
Output data	24 mA
Output signal	<20 V
Maximum output signal	≤600 Ω (at 20 mA)
No-load voltage	<20 mV _{PP} (at 600 Ω)
Load R _o	General data
Ripple	Supply voltage range: 9.6 V DC ... 30 V DC
General data	Nominal supply voltage: 24 V DC
Supply voltage range	Current consumption: 25 mA (at 24 V DC and in isolator operation)
Nominal supply voltage	Power consumption: ≤1400 mW (at I _{OUT} = 20 mA, 9.6 V DC, 600 Ω load)
Current consumption	0.05% (of final value, at 4 mA ... 20 mA)
Power consumption	0.0075%/K, typically 0.0075%/K
Maximum transmission error	>1.75 kHz (typically)
Temperature coefficient	<200 μs (typically)
Limit frequency (3 dB)	Reinforced insulation in accordance with IEC 61010-1
Step response (10-90%)	IP20
Electrical isolation	Class A product, see page 583
Degree of protection	CE-compliant
EMC note	Ex II 3 G Ex nA IIC T4 Gc X
Conformance/approvals	UL 508 Listed
Conformance	Class I, Div. 2, Groups A, B, C, D T5
ATEX	Class I, Zone 2, Group II CT5
UL, USA/Canada	C, EMC2
DNV GL	

Ordering data

Description	Type	Order No.	Pcs./Pkt.
3-way repeater power supplies	Push-in connection	MINI MCR-2-RPSS-I-I-PT	2902015
	Screw connection	MINI MCR-2-RPSS-I-I	2902014

Analog IN / Analog OUT Power supply doublers

new

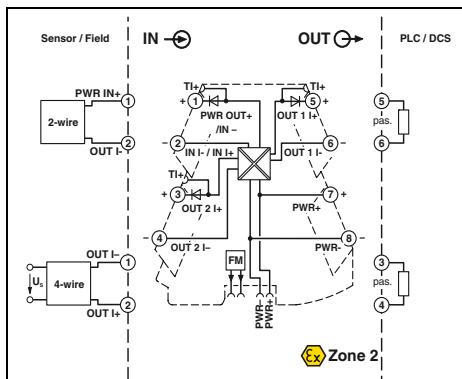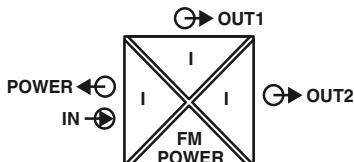

**Power supply doubler
with HART transmission**



Ex: DIN rail

Housing width 6.2 mm

Technical data

- Highly compact power supply doubler with electrical isolation for doubling, amplifying, and filtering standard analog signals
- Supply of 2-conductor sensors
- Can also be used as an isolator without supply
- Plug-in connection system
- Safe 3-way isolation
- Power supply and fault monitoring possible via DIN rail connector
- Status LED

Input data

Input signal

0 ... 20 mA, isolator operation /
4 ... 20 mA, repeater power supply and isolator operation

Input resistance

Transmitter supply voltage

90 Ω (+1.6 V)

>19.5 V

Output data

Output signal

0 ... 20 mA / 4 ... 20 mA

Maximum output signal

25 mA

No-load voltage

<20 V

Load R_B

≤500 Ω (per channel)

Ripple

<20 mV_{PP} (at 500 Ω)

General data

Supply voltage range

9.6 V DC ... 30 V DC

Nominal supply voltage

24 V DC

Current consumption

40 mA (at 24 V DC and in isolator operation)

Power consumption

1.6 W (at I_{OUT} = 20 mA, 500 Ω load)

Maximum transmission error

0.05% (of final value)

Temperature coefficient

0.0075%/K,

Limit frequency (3 dB)

>1 kHz (typically)

Step response (10-90%)

<400 μs (typically)

Electrical isolation

Reinforced insulation in accordance with IEC 61010-1

Degree of protection

IP20

EMC note

Class A product, see page 583

Conformance/approvals

CE-compliant

ATEX

Ex II 3 G Ex nA IIC T4 Gc X

UL, USA/Canada

UL 508 Listed

Class I, Div. 2, Groups A, B, C, D T5

Class I, Zone 2, Group IIC T5

B, B, A, A

DNV GL

Ordering data

Description

Type

Order No.

Pcs./Pkt.

4-way power supply doubler, with HART transmission and automatic active/passive detection at the outputs

Push-in connection
Screw connection

MINI MCR-2-RPSS-I-2i-PT
MINI MCR-2-RPSS-I-2i

2905629
2905628



1
1

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

Analog IN / Analog OUT

**2-way repeater power supplies,
output loop-powered**

new

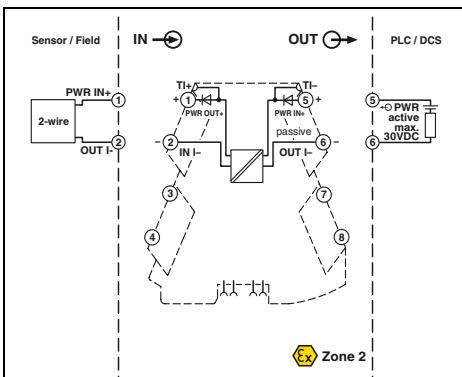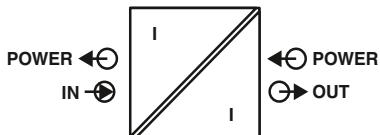

Either 1- or 2-channel



Housing width 6.2 mm

Technical data

Input data	0 ... 20 mA / 4 ... 20 mA
Input signal	$U_A - 5 V$
Transmitter supply voltage	0 ... 20 mA / 4 ... 20 mA
Output data	5 V ... 30 V
Output signal	$\leq 0.1\%$ (at 5 V) $(U_A - 5 V) \times 0.06\%$ $\leq 0.001\% / K$ 100 Hz
General data	Reinforced insulation in accordance with IEC 61010-1 IP20 Class A product, see page 583
Maximum transmission error	$\leq 0.1\%$ (at 5 V) $(U_A - 5 V) \times 0.06\%$ $\leq 0.001\% / K$ 100 Hz
Additional error, depending on the input voltage	$\leq 0.001\% / K$ 100 Hz
Temperature coefficient	Reinforced insulation in accordance with IEC 61010-1 IP20 Class A product, see page 583
Limit frequency (3 dB)	$\leq 0.001\% / K$ 100 Hz
Electrical isolation	CE-compliant Ex II 3 G Ex nA IIC T4 Gc X
Degree of protection	UL 508 Listed Class I, Div. 2, Groups A, B, C, D T6
EMC note	Class I, Zone 2, Group IIC T6
Conformance/approvals	
Conformance	
ATEX	
UL, USA/Canada	



Ordering data

Description	Type	Order No.	Pcs./Pkt.
Output loop-powered 2-way repeater power supply, for isolating current signals without auxiliary power			
Push-in connection	MINI MCR-2-RPS-II-I-OLP-PT	2906447	1
Screw connection	MINI MCR-2-RPS-II-OLP	2906446	1
Push-in connection	MINI MCR-2-RPS-2I-2I-OLP-PT	2906449	1
Screw connection	MINI MCR-2-RPS-2I-2I-OLP	2906448	1

MCR technology

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

Analog IN/Analog OUT 2-way passive isolators, input loop-powered

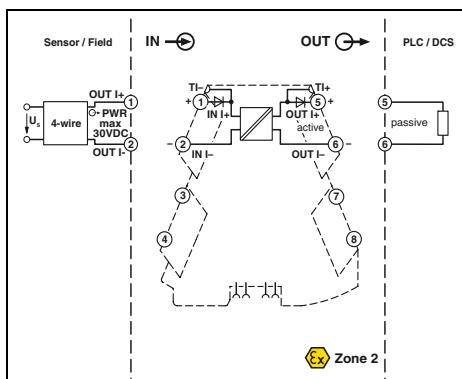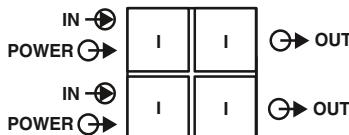

Ex n



Either 1- or 2-channel



Ex: Ex

Housing width 6.2 mm

Technical data

- Highly-compact 2-way repeater power supply
- Input loop-supplied
- Does not require any additional auxiliary voltage
- For electrical isolation and filtering of analog signals
- Powered via the current loop of the sensor
- Input signal = output signal 0(4) to 20 mA
- Plug-in connection system
- Status LED


Notes:

Information on MINI Analog Pro accessories can be found from page 107

Input data	0 ... 20 mA / 4 ... 20 mA
Input signal	30 V
Input voltage limitation	3.1 V ($I = 20 \text{ mA}$)
Voltage drop	Approx. 200 μA
Response current	
Output data	0 ... 20 mA / 4 ... 20 mA
Output signal	<600 Ω (at $I = 20 \text{ mA}$ output signal)
Load R_B	1:1 to input signal
Transmission Behavior	
General data	
Maximum transmission error	$\leq 0.1\%$ (of final value)
Additional error per 100 Ω load	$\leq 0.075\%$ (of measured value / 100 Ω load)
Temperature coefficient	$\leq 0.002\%/\text{K}$ (of measured value / 100 Ω load)
Limit frequency (3 dB)	100 Hz
Electrical isolation	Reinforced insulation in accordance with IEC 61010-1
Degree of protection	IP20
EMC note	Class A product, see page 583
Conformance/approvals	
Conformance	CE-compliant
ATEX	
UL, USA/Canada	UL 508 Listed
GL	Class I, Div. 2, Groups A, B, C, D T6
	Class I, Zone 2, Group IIC T6
	GL applied for



Ordering data

Description	Type	Order No.	Pcs./Pkt.
Input loop-powered 2-way isolator, for isolating current signals without auxiliary power			
single-channel	Push-in connection	MINI MCR-2-I-I-ILP-PT	2901995
single-channel	Screw connection	MINI MCR-2-I-I-ILP	2901994
two-channel	Push-in connection	MINI MCR-2-2I-2I-ILP-PT	2901997
two-channel	Screw connection	MINI MCR-2-2I-2I-ILP	2901996

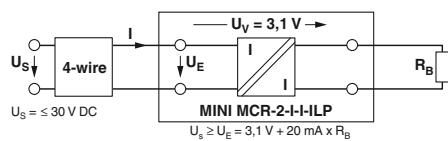

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

new

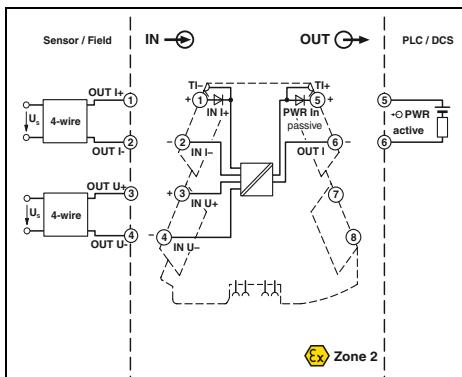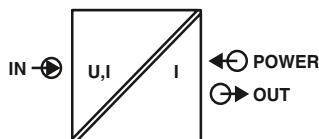Analog IN/Analog OUT
2-way passive isolators,
output loop-powered


D
W
H



Configurable,
up to 74 signal combinations

④-IEC Ex

Ex: ④-Ex

Housing width 6.2 mm

Technical data

Input data

Input signal (configurable using the DIP switch)

Maximum input signal

Input resistance

Output data

Output signal

Maximum output signal

Load R_B

Ripple

General data

Current consumption

Maximum transmission error

Temperature coefficient

Limit frequency (3 dB)

Step response (10-90%)

Electrical isolation

Degree of protection

EMC note

Conformance/approvals

Conformance

ATEX

UL, USA/Canada

DNV GL

U input

2 ... 10 V, additional areas can be configured, see table

<30 V

Approx. 100 kΩ (at ≤ 1 V,

otherwise approximately 1 MΩ)

4 ... 20 mA

32 mA

<1,000 Ω ((U_B - 8 V) / 22 mA)

<10 mV_{rms} (at 600 Ω)

≤20 mA

≤0.1% (of final value)

0.01%/K, typically 0.005%/K

Approx. 30 Hz

20 ms

Reinforced insulation in accordance with IEC 61010-1

IP20

Class A product, see page 583

CE-compliant

Ex II 3 G Ex nA IIC T4 Gc X

UL 508 Listed

Class I, Div. 2, Groups A, B, C, D T5

Class I, Zone 2, Group IIC T5

B, B, A, A

Ordering data

Description	Type	Order No.	Pcs./Pkt.
Output loop-powered 2-way isolator, for isolating current signals without auxiliary power			
Standard configuration	Push-in connection	MINI MCR-2-UI-I-OLP-PT	2902063
Standard configuration	Screw connection	MINI MCR-2-UI-I-OLP	2902061
Order configuration	Push-in connection	MINI MCR-2-UI-I-OLP-PT-C	2902062
Order configuration	Screw connection	MINI MCR-2-UI-I-OLP-C	2902060

Order key for MINI MCR-2-UI-I-OLP(-PT)(-C)

Order No. Input



2902060	0 mV ... 1,000 mV
---------	-------------------

2902060 ≈	0 mV ... 1,000 mV	0 V ... 10 V	-1,000 mV ... 1,000 mV	-10 V ... 10 V	0 mA ... 40 mA	-2 mA ... 2 mA
MINI MCR-2-	0 mV ... 750 mV	0 V ... 7.5 V	-750 mV ... 750 mV	-7.5 V ... 7.5 V	0 mA ... 30 mA	-3 mA ... 3 mA
UI-I-OLP-C	0 mV ... 500 mV	0 V ... 5 V	-500 mV ... 500 mV	-5 V ... 5 V	0 mA ... 20 mA	-10 mA ... 10 mA
	0 mV ... 300 mV	0 V ... 3 V	-300 mV ... 300 mV	-3 V ... 3 V	0 mA ... 12 mA	-15 mA ... 15 mA
	0 mV ... 250 mV	0 V ... 2.5 V	-250 mV ... 250 mV	-2.5 V ... 2.5 V	0 mA ... 10 mA	-20 mA ... 20 mA
	0 mV ... 200 mV	0 V ... 2 V	-200 mV ... 200 mV	-2 V ... 2 V	0 mA ... 8 mA	-30 mA ... 30 mA
	0 mV ... 150 mV	0 V ... 1.5 V	-125 mV ... 125 mV	-1.25 V ... 1.25 V	0 mA ... 7.5 mA	-40 mA ... 40 mA
	0 mV ... 125 mV	0 V ... 1.25 V	-120 mV ... 120 mV	-1.2 V ... 1.2 V	0 mA ... 5 mA	
	0 mV ... 120 mV	0 V ... 1.2 V	-150 mV ... 150 mV	-1.5 V ... 1.5 V	0 mA ... 6 mA	
	0 mV ... 100 mV	0 V ... 30 V	-100 mV ... 100 mV	-30 V ... 30 V	0 mA ... 4 mA	
	0 mV ... 75 mV	0 V ... 25 V	-75 mV ... 75 mV	-25 V ... 25 V	0 mA ... 3 mA	
	0 mV ... 60 mV	0 V ... 20 V	-60 mV ... 60 mV	-20 V ... 20 V	0 mA ... 2.5 mA	
	0 mV ... 50 mV	0 V ... 12.5 V	-50 mV ... 50 mV	-12.5 V ... 12.5 V	0 mA ... 2 mA	
		0 V ... 12 V		-12 V ... 12 V	4 mA ... 20 mA	
		0 V ... 15 V		-15 V ... 15 V	2 mA ... 10 mA	
		2 V ... 10 V		1 V ... 5 V	1 mA ... 5 mA	

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

Temperature

Temperature transducers for resistance thermometers

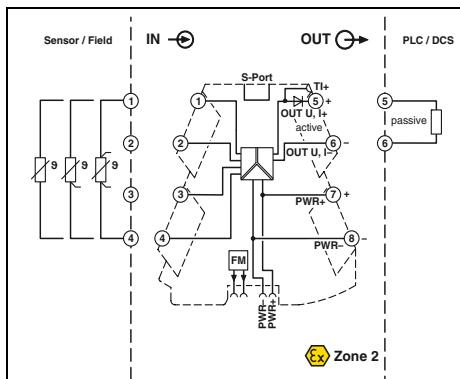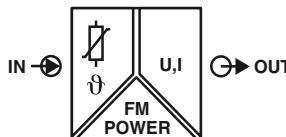

Ex n

μ C
NFC



Universal temperature transducer
for resistance thermometers



Housing width 6.2 mm

Technical data

Input data

Input signal (can be configured using DIP switches)

Temperature range

Pt, Ni, Cu sensors : 2-, 3-, 4-conductor

-200°C ... 850°C (range depends on sensor type, range can be set freely via software or in increments from -150°C to 850°C via DIP switches)

≥20 K

0 Ω ... 4,000 Ω (minimum measuring span: 10% of the selected measuring range)

U output

0 ... 5 V / 1 ... 5 V

I output

0 ... 20 mA / 4 ... 20 mA

0 ... 10 V / 10 ... 0 V

20 ... 0 mA / 20 ... 4 mA

Approx. 12.3 V

24.6 mA

<17.5 V

<31.5 mA

≤600 Ω (at 20 mA)

≥10 kΩ

<10 mV_{rms} (at 600 Ω)

<10 mV_{rms}

9.6 V DC ... 30 V DC

32 mA (24 V DC)

≤850 mW (at I_{OUT} = 20 mA, 9.6 V DC, 600 Ω load)

0.1% * 350 K / set measuring range; 0.1% >350 K (Pt/Ni)
0.3% * 200 K / set measuring range; 0.3% >200 K (Cu)

Temperature coefficient

Step response (0 - 99%)

0.01%/K

Typically 200 ms (2-conductor)

Typically 500 ms (3-conductor)

Typically 500 ms (4-conductor)

Reinforced insulation in accordance with IEC 61010-1

Class A product, see page 583

CE-compliant

Ex II 3 G Ex nA IIC T4 Gc X

UL 508 Listed

Class I, Div. 2, Groups A, B, C, D T6

Class I, Zone 2, Group IIC T6

C, EMC2

Ordering data

Description

Temperature transducers for resistance thermometers

Standard configuration

Push-in connection

MINI MCR-2-RTD-UI-PT

2902052

1

Standard configuration

Screw connection

MINI MCR-2-RTD-UI

2902049

1

Order configuration

Push-in connection

MINI MCR-2-RTD-UI-PT-C

2902051

1

Order configuration

Screw connection

MINI MCR-2-RTD-UI-C

2902048

1

Accessories

Programming adapter for configuring modules with S-PORT interface

IFS-USB-PROG-ADAPTER

2811271

1

USB programming adapter for configuring modules with Windows software

TWN4 MIFARE NFC USB ADAPTER

2909681

1

Bluetooth programming adapter, with USB and S-PORT interface

IFS-BT-PROG-ADAPTER

2905872

1

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

Order key for MINI MCR-2-RTD-UI(-PT)(-C) temperature transducers (standard configuration entered as example)

Order No.	Sensor type	Connection technology	Measuring unit	Measuring range Start	Measuring range End	Output	Output signal	Start	End
2902048	PT100	3	C	-50	150	I	4.0	20.0	/ ...
2902048 ≡ MINI MCR-2- RTD-UI-C	PT100 ≡ Pt 100 IEC751 PT200 ≡ Pt 200 IEC751 PT500 ≡ Pt 500 IEC751 PT1000 ≡ Pt 1000 IEC751 PT100G ≡ Pt 100 GOST 6651-2009 ($\alpha = 0.00394$) PT1000G ≡ Pt 1000 GOST 6651-2009 ($\alpha = 0.00394$) PT100J ≡ Pt 100 JIS C1604/1997 PT1000J ≡ Pt 1000 JIS C1604/1997 Ni100 ≡ Ni 100 DIN 43760 Ni1000 ≡ Ni 1000 DIN 43760 Cu50 ≡ Cu 50 GOST 6651-2009 ($\alpha = 0.00428$) Cu100 ≡ Cu 100 GOST 6651-2009 ($\alpha = 0.00428$) Cu53 ≡ Cu 53 GOST 6651-2009 ($\alpha = 0.00426$)	2 ≡ 2-conductor 3 ≡ 3-conductor 4 ≡ 4-conductor	C ≡ °C F ≡ °F	Freely selectable between -200°C ... 850°C (measuring range limits depend on sensor type)	Freely selectable between -200°C ... 850°C (measuring range limits depend on sensor type)	I ≡ I U ≡ U	0.0 ≡ 0 mA I: freely selectable between 0.0 ... 21 mA U: freely selectable between 0.0 ... 10.5 V	20.0 ≡ 20 mA I: freely selectable between 0.0 ... 21 mA U: freely selectable between 0.0 ... 10.5 V	20.0 ≡ 20 mA I: freely selectable between 0.0 ... 21 mA U: freely selectable between 0.0 ... 10.5 V
2902051 ≡ MINI MCR-2- RTD-UI-PT-C									

Minimum measuring span 20 K

Output signal span at least 0.5 V / 1 mA
Increment 0.1 V / 0.1 mA

Failure information

Behavior in the event of an error	Open circuit	Short circuit	Measuring value over-range	Measured value under-range	Factory calibration certificate
NE43DO	0.0	0.0	0.0	0.0	None
Note: Failure information in accordance with NE 43 can only be selected for 4 ... 20 mA output					
NE43UP ≡ NE 43 upscale NE43DO ≡ NE 43 downscale NE430 ≡ NE 43 0 mA NE43UD ≡ NE 43 upscale/ downscale	21.5 mA 3.5 mA 0 mA 3.5 mA	21.5 mA 3.5 mA 0 mA 3.5 mA	21.5 mA 3.5 mA 0 mA 21.5 mA	21.5 mA 3.5 mA 0 mA 21.5 mA	None ≡ no factory calibration certificate Yes ≡ certificate but no test data YesPlus ≡ certificate with test data



Sensor types and measuring ranges for MINI MCR-2-RTD-UI(-PT)(-C) temperature transducers

Sensor type	Standard	Measuring range	Smallest measuring span	Adjustable using:
Pt 100	IEC 751 = GOST 6651-2009 ($\alpha = 0.00385$)	-200°C ... +850°C	20 K	DIP switch
Pt 200	IEC 751 = GOST 6651-2009 ($\alpha = 0.00385$)	-200°C ... +850°C	20 K	DIP switch
Pt 500	IEC 751 = GOST 6651-2009 ($\alpha = 0.00385$)	-200°C ... +850°C	20 K	Software or smartphone app
Pt 1000	IEC 751 = GOST 6651-2009 ($\alpha = 0.00385$)	-200°C ... +850°C	20 K	Software or smartphone app
Pt 100	GOST 6651-2009 ($\alpha = 0.00391$)	-200°C ... +850°C	20 K	Software or smartphone app
Pt 1000	GOST 6651-2009 ($\alpha = 0.00391$)	-200°C ... +850°C	20 K	Software or smartphone app
Pt 100	JIS C1604-1997	-200°C ... +850°C	20 K	Software or smartphone app
Pt 1000	JIS C1604-1997	-200°C ... +850°C	20 K	Software or smartphone app
Ni100	DIN 43760	-60°C ... +250°C	20 K	Software or smartphone app
Ni 1000	DIN 43760	-60°C ... +250°C	20 K	Software or smartphone app
Cu50	GOST 6651-2009 ($\alpha = 0.0428$)	-180°C ... +200°C	20 K	Software or smartphone app
Cu100	GOST 6651-2009 ($\alpha = 0.0428$)	-180°C ... +200°C	20 K	Software or smartphone app
Cu53	GOST 6651-2009 ($\alpha = 0.0426$)	-50°C ... +180°C	20 K	Software or smartphone app
Customer-specific characteristic curves		-200°C ... +850°C	20 K	Software or smartphone app

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

Temperature

Temperature transducers for thermocouples

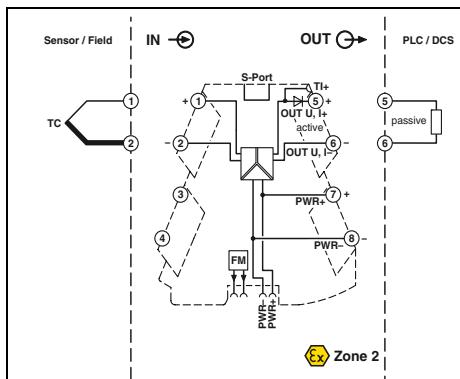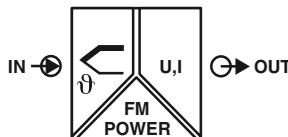

**Universal temperature transducer
for thermocouples**



Housing width 6.2 mm

Technical data

Input data

Input signal (can be configured using DIP switches)

Temperature range

B, C, E, J, K, N, R, S, T, L, U, A-1, A-2, A-3, M, L

-250°C ... 2500°C (range depends on sensor type, range can be set freely via software or in increments from -150°C to 1350°C via DIP switches)

Measuring range span

Output data

Output signal (configurable via DIP switch or freely via software)

min. 50 K

U output

0 ... 5 V / 1 ... 5 V

I output

0 ... 20 mA / 4 ... 20 mA

0 ... 10 V / 10 ... 0 V

20 ... 0 mA / 20 ... 4 mA

Approx. 12.3 V

24.6 mA

<17.5 V

<31.5 mA

≤600 Ω (at 20 mA)

≥10 kΩ

<10 mV_{rms}

<10 mV_{rms} (at 600 Ω)

General data

Supply voltage range

Current consumption

Power consumption

9.6 V DC ... 30 V DC

32.7 mA (24 V DC)

≤850 mW (at I_{OUT} = 20 mA, 9.6 V DC, 600 Ω load)

0.1% * 600 K / set measuring range;
0.1% >600 K (C, E, J, K, N, T, L, U, M Gost, L Gost)
0.2% * 600 K / set measuring range;
0.2% >600 K (B, R, S, A1, A2, A3)
0.2% * 600 K / set measuring range;
0.2% >600 K (E, J, K, N, T, L, U, M Gost, L Gost); Highspeed Mode
0.4% * 600 K / set measuring range;
0.4% >600 K (B, R, S, A1, A2, A3); Highspeed Mode

- (typically 2 K (2 K + (0.2 K * ΔT)))

≤0.01%K

Typically 400 ms (highspeed Mode: typically 150 ms)

Reinforced insulation in accordance with IEC 61010-1

Class A product, see page 583

CE-compliant

Ex II 3 G Ex nA IIC T4 Gc X

UL 508 Listed

Class I, Div. 2, Groups A, B, C, D T6

Class I, Zone 2, Group IIC T6

C, EMC2

Ordering data

DIN GL

Description	Type	Order No.	Pcs./Pkt.
Temperature transducers for thermocouples			
Standard configuration	Push-in connection	MINI MCR-2-TC-UI-PT	2905249
Standard configuration	Screw connection	MINI MCR-2-TC-UI	2902055
Order configuration	Push-in connection	MINI MCR-2-TC-UI-PT-C	2905248
Order configuration	Screw connection	MINI MCR-2-TC-UI-C	2902053

Accessories

IFS-USB-PROG-ADAPTER	2811271	1
TWN4 MIFARE NFC USB ADAPTER	2909681	1
IFS-BT-PROG-ADAPTER	2905872	1

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

Order key for MINI MCR-2-TC-UI(-PT)(-C) temperature transducers (standard configuration entered as an example)

Order No.	Sensor type	Cold junction error compensation	Measuring unit	Measuring range Start	Measuring range End	Output Output signal	Start	End
2902053	J	1	C $\hat{=}$ °C F $\hat{=}$ °F	-200	1200	I	4.0	20.0 / ...
2902053 $\hat{=}$ MINI MCR-2-TC-UI-C	B $\hat{=}$ B IEC 584-1 (Pt30Rh-Pt6Rh) E $\hat{=}$ E IEC 584-1 (NiCr-CuNi) J $\hat{=}$ J IEC 584-1 (Fe-CuNi) K $\hat{=}$ K IEC 584-1 (NiCr-Ni) N $\hat{=}$ N IEC 584-1 (NiCrSi-NiSi) R $\hat{=}$ R IEC 584-1 (Pt13Rh-Pt) S $\hat{=}$ S IEC 584-1 (Pt10Rh-Pt) T $\hat{=}$ T IEC 584-1 (Cu-CuNi) L $\hat{=}$ L DIN 43760 (Fe-CuNi) U $\hat{=}$ U DIN 43760 (Cu-CuNi) A1G $\hat{=}$ A-1 GOST 8.585-2001 A2G $\hat{=}$ A-2 GOST 8.585-2001 A3G $\hat{=}$ A-3 GOST 8.585-2001 MG $\hat{=}$ M GOST 8.585-2001 LG $\hat{=}$ L GOST 8.585-2001	0 $\hat{=}$ OFF 1 $\hat{=}$ AN	Freely selectable between -250°C ... 2500°C (measuring range limits depend on sensor type)	Freely selectable between -250°C ... 2500°C (measuring range limits depend on sensor type)	I $\hat{=}$ I U $\hat{=}$ U	0.0 $\hat{=}$ 0 mA I: freely selectable between 0.0 ... 21 mA U: freely selectable between 0.0 ... 10.5 V	20.0 $\hat{=}$ 20 mA I: freely selectable between 0.0 ... 21 mA U: freely selectable between 0.0 ... 10.5 V	

Minimum measuring span 50 K

Output signal span at least 0.5 V / 1 mA
Increment 0.1 V / 0.1 mA

Failure information

Behavior in the event of an error

Open circuit

Measuring value over-range

Measured value under-range

Factory calibration certificate

NE43DO	0.0	0.0	0.0	None
FD $\hat{=}$ Freely definable	0.0 $\hat{=}$ 0 mA I: freely selectable between 0.0 ... 21.5 mA U: freely selectable between 0.0 ... 11 V (signal type corresponds to selected output signal)	0.0 $\hat{=}$ 0 mA I: freely selectable between 0.0 ... 21.5 mA U: freely selectable between 0.0 ... 11 V (signal type corresponds to selected output signal)	0.0 $\hat{=}$ 0 mA I: freely selectable between 0.0 ... 21.5 mA U: freely selectable between 0.0 ... 11 V (signal type corresponds to selected output signal)	None $\hat{=}$ no factory calibration certificate
Note: Failure information in accordance with NE 43 can only be selected for 4 ... 20 mA output				
NE43UP $\hat{=}$ NE 43 upscale	21.5 mA	21.5 mA	21.5 mA	Yes $\hat{=}$ certificate but no test data
NE43DO $\hat{=}$ NE 43 downscale	3.5 mA	3.5 mA	3.5 mA	YesPlus $\hat{=}$ certificate with test data
NE430 $\hat{=}$ NE 43 0 mA	0 mA	0 mA	0 mA	
NE43UD $\hat{=}$ NE 43 upscale/downscale	3.5 mA	21.5 mA	21.5 mA	



Sensor types and measuring ranges for MINI MCR-2-TC-UI(-PT)(-C) temperature transducers

Sensor type	Standard	Measuring range	Smallest measuring span	Adjustable using:
B	IEC 584-1	+500°C ... +1,820°C	50 K	Software or smartphone app
E	IEC 584-1	-230°C ... +1,000°C	50 K	Software or smartphone app
J	IEC 584-1	-210°C ... +1,200°C	50 K	DIP switch
K	IEC 584-1	-250°C ... +1,372°C	50 K	DIP switch
N	IEC 584-1	-200°C ... +1,300°C	50 K	Software or smartphone app
R	IEC 584-1	-50°C ... +1,768°C	50 K	Software or smartphone app
S	IEC 584-1	-50°C ... +1,768°C	50 K	Software or smartphone app
T	IEC 584-1	-200°C ... +400°C	50 K	Software or smartphone app
L	DIN 43710	-200°C ... +900°C	50 K	Software or smartphone app
U	DIN 43710	-200°C ... +600°C	50 K	Software or smartphone app
A-1	GOST 8.585	0°C ... +2,500°C	50 K	Software or smartphone app
A-2	GOST 8.585	0°C ... +1,800°C	50 K	Software or smartphone app
A-3	GOST 8.585	0°C ... +1,800°C	50 K	Software or smartphone app
M	GOST 8.585	-200°C ... +100°C	50 K	Software or smartphone app
L	GOST 8.585	-200°C ... +800°C	50 K	Software or smartphone app
Customer-specific characteristic curves		-250°C ... +2,500°C	50 K	Software or smartphone app

Frequency

Universal frequency transducers

new

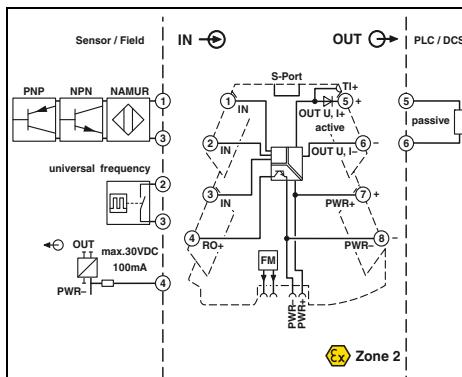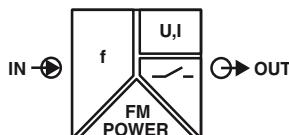

Configurable,
universal frequency or PWM input



Housing width 6.2 mm

Technical data

- Universally configurable, highly compact 3-way isolated frequency transducer with inverting transistor switching output
- Suitable for the connection of NAMUR proximity sensors (IEC 60947-5-6 and EN 50227) as well as for sensors with NPN and PNP outputs that generate a frequency signal
- For electrical isolation, conversion, amplification, and filtering of frequency and PWM signals
- Frequency signals in the range from 0.002 to 200 kHz and PWM signals up to 1 kHz
- Supports fault monitoring
- Plug-in connection system
- Safe 3-way isolation
- Standard behavior can be configured via DIP switches
- Freely configurable via software or smartphone app
- Power supply and fault monitoring possible via DIN rail connector
- Status and error indicator LEDs

Notes:

The configuration software can be downloaded from the Internet: phoenixcontact.net/products.

Information on the programming adapters can be found on page 111

Input data Input sources

Frequency measuring range
Maximum input signal
PWM (range)

Measuring range span

Output data

Output signal

Maximum output signal

Load R_B

Ripple

Switching output

Relay output

Max. switching voltage

Maximum switching current

Minimum switching current

General data

Supply voltage range

Current consumption

Power consumption

Maximum transmission error

Temperature coefficient

Step response (0 - 99%)

Electrical isolation

EMC note

Conformance/approvals

Conformance

ATEX

UL, USA/Canada

NAMUR initiators
NPN/PNP transistor outputs
Floating contact (dry contact)
Frequency generator
Incremental encoder (speed only)
HTL encoders
TTL rotary transducer
S0 signal
0.002 Hz ... 200 kHz
30 V (incl. DC voltage)
0.002 Hz ... 60 Hz (Duty cycle 2 ... 98%)
60 Hz ... 300 Hz (Duty cycle 5 ... 95%)
300 Hz ... 600 Hz (Duty cycle 10 ... 90%)
600 Hz ... 1,000 Hz (Duty cycle 20 ... 80%)
 ≥ 2 V

U output	I output
0 ... 10 V / 2 ... 10 V	0 ... 20 mA / 4 ... 20 mA
0 ... 5 V / 1 ... 5 V	0 ... 10 mA / 2 ... 10 mA
Approx. 12.3 V	24.6 mA
≥ 10 k Ω	≤ 600 Ω (at 20 mA)
<20 mV _{PP} (at 600 Ω)	<20 mV _{PP} (at 600 Ω)

1 N/O contact

30 V DC

100 mA (30 V)

100 μ A

9.6 V DC ... 30 V DC

32 mA (24 V DC)

63 mA (12 V DC)

≤ 1 W (at $I_{OUT} = 20$ mA, 9.6 V DC, 600 Ω load)

0.1% (Frequency)
1% (PWM signal)
0.01%/K, typically 0.01%/K
<35 ms ($f > 500$ Hz)

Reinforced insulation in accordance with IEC 61010-1
Class A product, see page 583

CE-compliant

Ex II 3 G Ex nA IIC T4 Gc X

UL 508 Listed

Class I, Div. 2, Groups A, B, C, D T5

Class I, Zone 2, Group IIC T5

B, B, A, A

Ordering data

Description	Type	Order No.	Pcs./Pkt.
MCR frequency transducers			
Standard configuration	Push-in connection	MINI MCR-2-F-UI-PT	2902058
Standard configuration	Screw connection	MINI MCR-2-F-UI	2902056
Order configuration	Push-in connection	MINI MCR-2-F-UI-PT-C	2902059
Order configuration	Screw connection	MINI MCR-2-F-UI-C	2902057

Accessories

IFS-USB-PROG-ADAPTER	2811271	1
TWN4 MIFARE NFC USB ADAPTER	2909681	1
IFS-BT-PROG-ADAPTER	2905872	1
MINI MCR-2-SPS-24-15-PT	1033201	1
MINI MCR-2-SPS-24-15	1033202	1

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

Order key for MINI MCR-2-F-UI(-PT)(-C) 3-way signal conditioners (standard configuration entered as an example)

Order No.	Input	Sensor	Low voltage level	High voltage level	Frequency signal	PWM signal	Output signal			
	Input signal		Start	End	Start	End				
2902057 ≈ MINI MCR-2-F-UI-C	f	NAMUR	0	30	0.002	200,000.000	2	98	I	...
2902059 ≈ MINI MCR-2-F-UI-PT-C	f ≈ f PWM ≈ PWM	NAMUR ≈ NAMUR NPN ≈ NPN PNP ≈ PNP Frequency ≈ General frequency input	U: freely selectable between 0.0 ... 28 V The minimum measuring span must be 2 V.	U: freely selectable between 2.0 ... 30 V The minimum measuring span must be 2 V.	0.002 ≈ 0.002 Hz f: ≈ freely selectable between 0.002 ... 133,333.33 Hz	200,000.000 ≈ 200,000.000 Hz f: ≈ freely selectable between 0.003 ... 200,000 Hz	PWM: freely selectable between 2 ... 88% Output signal span at least 0.5 V / 1 mA Increment 0.1 V / 0.1 mA	PWM: freely selectable between 12 ... 98%	I ≈ I U ≈ U	

Measuring range span at least 10%/see below*
Increment 1% / 0.001 HzOutput signal span at least 0.5 V / 1 mA
Increment 0.1 V / 0.1 mA

Output	Switching output	Factory calibration certificate			
Start	End	Switching function	Low switching point (SPL)	High switching point (SPH)	
... / 4.0	20.0	0	0.0	0.0	NONE
0 ≈ 0 mA I: freely selectable between 0.0 ... 20 mA U: freely selectable between 0.0 ... 10 V	0 ≈ 0 mA I: freely selectable between 0.0 ... 21 mA U: freely selectable between 0.0 ... 10.5 V	0 ≈ L 1 ≈ H 2 ≈ L -->SPH -->H 3 ≈ H -->SPH -->L 4 ≈ L -->SPH -->H -->SPH -->L 5 ≈ H -->SPH -->L -->SPH -->H 6 ≈ L -->SPH -->H -->SPH -->L 7 ≈ H -->SPH -->L -->SPH -->H	f: ≈ freely selectable between 0.002 ... 133,333.33 Hz PWM: freely selectable between 2 ... 88% Only values for switching functions 4, 5, 6, 7 can be set	f: ≈ freely selectable between 0.003 ... 200,000 Hz PWM: freely selectable between 12 ... 98% Only values for switching functions 2, 3, 4, 5, 6, 7 can be set	NONE YES YES PLUS Values depend on the input range selected Values depend on the input range selected

Note:

L = Low (relay off)
 H = High (relay on)
 SPL = Setpoint Low
 SPH = Setpoint High

* Note:

The minimum separation between the two values depends on the frequency range in which they are located.

If the start value is being set, then the maximum possible value that can be set depends on the already set final value.

If the final value is being set, then the smallest possible value that can be set depends on the already set start value.

If the start value is being set:

Final Value	Maximum possible start value that can be set
≤ 10.1 Hz	Final value 1.01
>10.1 Hz ... 110 Hz	Final value 1.1
>110 Hz ... 240 Hz	Final value 1.2
>240 Hz ... 364 Hz	Final value 1.3
>364 Hz ... 490 Hz	Final value 1.4
>490 Hz	Final value 1.5



If the final value is being set:

Start value	Smallest possible final value that can be set
≤ 10 Hz	Start value 1.01
>10 Hz ... 100 Hz	Start value 1.1
>100 Hz ... 200 Hz	Start value 1.2
>200 Hz ... 280 Hz	Start value 1.3
>280 Hz ... 350 Hz	Start value 1.4
>350 Hz	Start value 1.5

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

Frequency

Analog frequency transducers

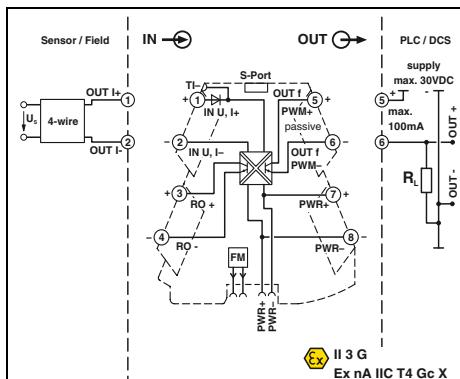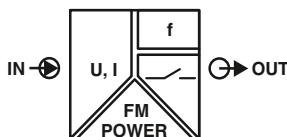

Ex n



D W H



Configurable,
frequency, PWM or switching output



Ex: II 3 G Ex nA IIC T4 Gc X

Housing width 6.2 mm

Technical data

Input data

Input signal (configurable via DIP switch or freely via software)

U input

0 V ... 10 V	0 mA ... 20 mA
2 V ... 10 V	4 mA ... 20 mA
0 V ... 5 V	0 mA ... 10 mA
1 V ... 5 V	2 mA ... 10 mA
10 V ... 0 V	20 mA ... 0 mA
10 V ... 2 V	20 mA ... 4 mA
5 V ... 0 V	10 mA ... 0 mA
5 V ... 1 V	10 mA ... 2 mA
0 V ... 12 V	0 mA ... 24 mA
12 V	24 mA
>120 kΩ	Approx. 50 Ω (+ 0.7 V for test diode)

Maximum input signal

Input resistance

Frequency output

0 Hz ... 10 kHz / 0 Hz ... 5 kHz	15.6 kHz (10 bit) / 1.9 kHz (10 bit)
0 Hz ... 2.5 kHz / 0 Hz ... 1 kHz	3.9 kHz (12 bit) / 488 Hz (12 bit)
0 Hz ... 500 Hz / 0 Hz ... 250 Hz	977 Hz (14 bit) / 122 Hz (14 bit)
0 Hz ... 100 Hz / 0 Hz ... 50 Hz	50 Hz (15 Bit) / 244 Hz (16 bit)
4 mA ≤(U _L / R _L) ≤100 mA	12 mA ≤(U _L / R _L) ≤100 mA

Minimum load

Load current maximum

PWM output

Approx. 50 Ω (+ 0.7 V for test diode)

Maximum switching voltage

Overrange/underrange

Frequency output

0 Hz ... 10 kHz / 0 Hz ... 5 kHz	15.6 kHz (10 bit) / 1.9 kHz (10 bit)
0 Hz ... 2.5 kHz / 0 Hz ... 1 kHz	3.9 kHz (12 bit) / 488 Hz (12 bit)
0 Hz ... 500 Hz / 0 Hz ... 250 Hz	977 Hz (14 bit) / 122 Hz (14 bit)
0 Hz ... 100 Hz / 0 Hz ... 50 Hz	50 Hz (15 Bit) / 244 Hz (16 bit)
4 mA ≤(U _L / R _L) ≤100 mA	12 mA ≤(U _L / R _L) ≤100 mA

General data

Supply voltage range

Can be set (via software)

Nominal supply voltage

9.6 V DC ... 30 V DC

Current consumption

24 V DC

Power consumption

27 mA (12 V DC)

Transmission error, maximum

13.5 mA (24 V DC)

Temperature coefficient

≤350 mW (9.6 V DC)

Step response (0 - 99%)

≤0.1% (>7 kHz ≤0.2%)

Electrical isolation

<0.01%/K, typically 0.01%/K

Degree of protection

120 ms (15 Hz sample rate)

EMC note

Further values can be set via software

Conformance/approvals

Reinforced insulation in accordance with IEC 61010-1

Conformance

IP20

ATEX

Class A product, see page 583

UL, USA/Canada

CE-compliant

II 3 G Ex nA IIC T4 Gc X

DNV GL

UL 508 Listed

Class I, Div. 2, Groups A, B, C, D T6

Class I, Zone 2, Group IIC T6

B, B, A, A

Ordering data

Description

Type

Order No.

Pcs./Pkt.

Analog frequency converter with limit value function

Standard configuration

Push-in connection

MINI MCR-2-UI-FRO-PT

2902032

1

Standard configuration

Screw connection

MINI MCR-2-UI-FRO

2902031

1

Order configuration

Push-in connection

MINI MCR-2-UI-FRO-PT-C

2906202

1

Order configuration

Screw connection

MINI MCR-2-UI-FRO-C

2906201

1

Accessories

Programming adapter for configuring modules with S-PORT interface

IFS-USB-PROG-ADAPTER

2811271

1

USB programming adapter for configuring modules with Windows software

TWN4 MIFARE NFC USB ADAPTER

2909681

1

Bluetooth programming adapter, with USB and S-PORT interface

IFS-BT-PROG-ADAPTER

2905872

1

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

Order key for MINI MCR-2-UI-FRO(-PT)(-C) analog frequency measuring transducers (standard configuration entered as example)

Order No.	Input	Output	Measuring range limit					
	Input signal	Start	End	Output signal	Carrier frequency	Start	End	Range limit
2906201 ≈ MINI MCR-2- UI-FRO-C	I ≈ I U ≈ U	0.0	20.0	I	0	0	1,000	15 / ...
2906202 ≈ MINI MCR-2- UI-FRO-PT-C								



Measuring range span at least 0.5 V / 1 mA
Increment 0.1 V / 0.1 mAOutput signal span at least 10 Hz / 1%
Increment 1 Hz / 0.1%

Cut-off frequency	Failure information	Behavior in the event of an error	Measuring value over-range	Measured value under-range	Factory calibration certificate
	Open circuit / short circuit				
... / 15	0	FD	0	0	NONE
15 Hz ≈ 15 Hz 60 Hz ≈ 60 Hz 240 Hz ≈ 240 Hz	0 ≈ 0 Hz f: freely selectable between 0 ... 11 kHz D: freely selectable between 0.0 and 100% (free definition only for unlimited output) (signal type corresponds to selected output signal)	FD ≈ Freely definable Failure information only adjustable for unlimited output	0 ≈ 0 Hz f: freely selectable between 0 ... 11 kHz D: freely selectable between 0.0 and 100% (free definition only for unlimited output) (signal type corresponds to selected output signal)	0 ≈ 0 Hz f: freely selectable between 0 ... 11 kHz D: freely selectable between 0.0 and 100% (free definition only for unlimited output) (signal type corresponds to selected output signal)	None ≈ no factory calibration certificate Yes ≈ certificate but no test data YesPlus ≈ certificate with test data

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

Potentiometers

Potentiometer transducers

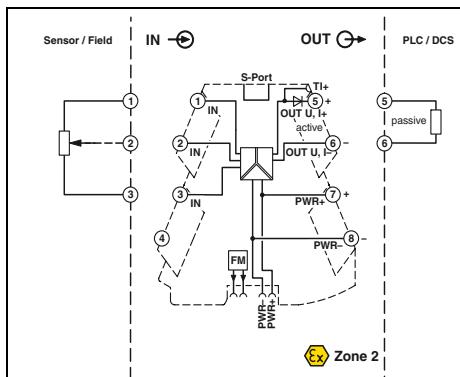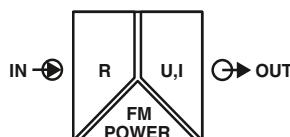

**Potentiometer transducer,
configurable**



Ex: ATEX

Housing width 6.2 mm

Technical data

- Universally configurable, highly compact potentiometer transducer for electrical isolation, conversion, amplification, and filtering of potentiometer signals
- For potentiometers from $100\ \Omega$ to $100\ k\Omega$
- Automatic potentiometer detection without manual adjustment
- Plug-in connection system
- Safe 3-way isolation
- Standard signal combinations configurable via DIP switches
- Freely-configurable with software or smartphone app
- Power supply and fault monitoring possible via DIN rail connector
- Status and error indicator LEDs

Notes:

- The configuration software can be downloaded from the Internet: phoenixcontact.net/products.
- Information on the programming adapters can be found on page 111
- Information on MINI Analog Pro accessories can be found from page 107
- To order a product with an order configuration, please enter the desired configuration by referring to the order key.

Input data	100 Ω ... 100 $k\Omega$	I output
Potentiometer	U output	0 ... 20 mA / 4 ... 20 mA
Output data	Output signal (configurable via DIP switch or freely via software)	
Maximum output signal	0 ... 5 V / 0 ... 10 V	20 ... 0 mA / 20 ... 4 mA
No-load voltage	Approx. 12.3 V	24.6 mA
Short-circuit current	<31.5 mA	<17.5 V
Load R_B	$\geq 10\ k\Omega$	$\leq 600\ \Omega$ (at 20 mA)
Ripple	<20 mV _{PP} (at 10 $k\Omega$)	<20 mV _{PP}
Behavior in the event of a sensor error	configurable	
General data		
Supply voltage range	9.6 V DC ... 30 V DC	
Nominal supply voltage	24 V DC	
Current consumption	33 mA (24 V DC)	
Power consumption	$\leq 850\ mW$ (at $I_{OUT} = 20\ mA$, 9.6 V DC, 600 Ω load)	
Maximum transmission error	<0.1% ($R < 240\ \Omega$ = <0.2%)	
Temperature coefficient	0.01%/K, typically 0.01%/K	
Step response (0 - 99%)	<60 ms	
Electrical isolation	Reinforced insulation in accordance with IEC 61010-1	
Degree of protection	IP20	
EMC note	Class A product, see page 583	
Conformance/approvals		
Conformance	CE-compliant	
ATEX	Ex II 3 G Ex nA IIC T4 Gc X	
UL, USA/Canada	UL 508 Listed	
DNV GL	Class I, Div. 2, Groups A, B, C, D T5	
	Class I, Zone 2, Group IIC T5	
	C, EMC2	

Ordering data

Type	Order No.	Pcs./Pkt.
MINI MCR-2-POT-UI-PT	2902017	1
MINI MCR-2-POT-UI	2902016	1
MINI MCR-2-POT-UI-PT-C	2905006	1
MINI MCR-2-POT-UI-C	2905005	1

Accessories

Programming adapter for configuring modules with S-PORT interface	IFS-USB-PROG-ADAPTER	2811271	1
USB programming adapter for configuring modules with Windows software	TWN4 MIFARE NFC USB ADAPTER	2909681	1
Bluetooth programming adapter, with USB and S-PORT interface	IFS-BT-PROG-ADAPTER	2905872	1

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

Order key for MINI MCR-2-POT-UI(-PT)(-C) potentiometer measuring transducers (standard configuration entered as an example)




Order No.	Automatic potentiometer detection	Output	Start	End	Sliding mean value	Open circuit detection	
2905005	AUTO	I	4.0	20.0	1	ON	...
2905005 ≈ MINI MCR-2-POT-UI-C	AUTO ≈ ON OFF ≈ OFF	I ≈ I U ≈ U	0.0 ≈ 0 mA I: freely selectable between 0.0 ... 21 mA	20.0 ≈ 20 mA I: freely selectable between 0.0 ... 21 mA	1 2 3 4 5 6 7 8 9 10	ON ≈ ON OFF ≈ OFF	

Output signal span at least 0.5 V / 1 mA
Increment 0.1 V / 0.1 mA

Failure information		Behavior in the event of an error	Open circuit slider	Input open (no potentiometer connected)	Measuring value over-range	Measured value under-range
...	NE43DO	FD ≈ Freely definable	0.0	0.0	0.0	0.0
Note: Failure information in accordance with NE 43 can only be selected for 4 ... 20 mA output						
NE43UP ≈ NE 43 upscale NE43DO ≈ NE 43 downscale NE43O ≈ NE 43 0 mA NE43UD ≈ NE 43 upscale/downscale		21.5 mA 3.5 mA 0 mA 3.5 mA	21.5 mA 3.5 mA 0 mA 3.5 mA	0.0 ≈ 0 mA I: freely selectable between 0.0 ... 21.5 mA U: freely selectable between 0.0 ... 11 V (signal type corresponds to selected output signal)	21.5 mA 3.5 mA 0 mA 21.5 mA	0.0 ≈ 0 mA I: freely selectable between 0.0 ... 21.5 mA U: freely selectable between 0.0 ... 11 V (signal type corresponds to selected output signal)

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

Digital IN Signal conditioners

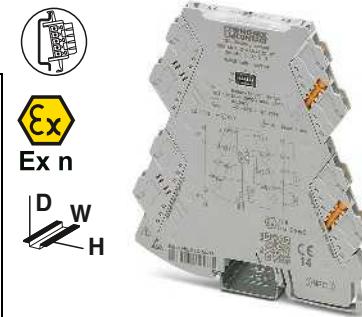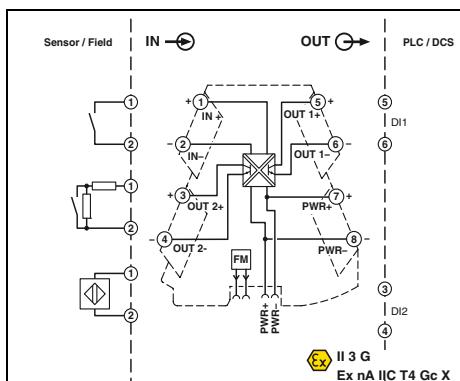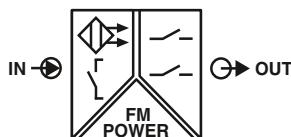

Configurable, for NAMUR sensors
and floating contacts

EAC
Ex:
Housing width 6.2 mm

Technical data

- Highly compact signal conditioners for electrical isolation, amplification, and duplication of proximity sensor signals
- For proximity sensors in accordance with IEC 60947-5-6 and EN 50227
- Floating contacts and contacts with resistance circuit can be connected
- Plug-in connection system
- Input and output signals can be configured via DIP switches
- Transistor switching contacts on the output
- Second output can be used as a doubler or error signaling output
- Safe 3-way isolation
- Switchover between operating current and quiescent current (inverted switching behavior)
- Power supply and fault monitoring possible via DIN rail connector
- Status LEDs

Notes:

Information on MINI Analog Pro accessories can be found from page 107

Input data

Input signal

Control circuit

No-load voltage

Switching points (in accordance with IEC 60947-5-6)

Line error detection

Switching output

Transistor output

Max. switching voltage

Max. switching current

Switching frequency

General data

Supply voltage range

Nominal supply voltage

Current consumption

Power consumption

Electrical isolation

Degree of protection

EMC note

Conformance/approvals

Conformance

ATEX

UL, USA/Canada

DNV GL

NAMUR proximity sensors (EN 60947-5-6)

open circuit switch contacts

Switch contacts with resistance circuit

8.2 V DC ±10%

<1.2 mA (blocking)

>2.1 mA (conductive)

>6 mA (in the event of a short-circuit)

<0.35 mA (with wire break)

N/O contact behavior 2x

30 V DC

50 mA

5 kHz

9.6 V DC ... 30 V DC

24 V DC

18 mA (24 V DC)

35 mA (12 V DC)

450 mW (9.6 V DC)

Reinforced insulation in accordance with IEC 61010-1

IP20

Class A product, see page 583

CE-compliant

II 3 G Ex nA IIC T4 Gc X

UL 508 Listed

Class I, Div. 2, Groups A, B, C, D T6

Class I, Zone 2, Group IIC T6

B, B, A, A

Ordering data

Description

Type

Order No.

Pcs./Pkt.

NAMUR signal conditioner

Push-in connection
Screw connection

MINI MCR-2-NAM-2RO-PT
MINI MCR-2-NAM-2RO




2902005
2902004

1
1

MCR technology

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

Limit values, threshold value switches

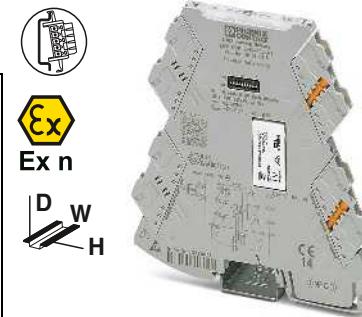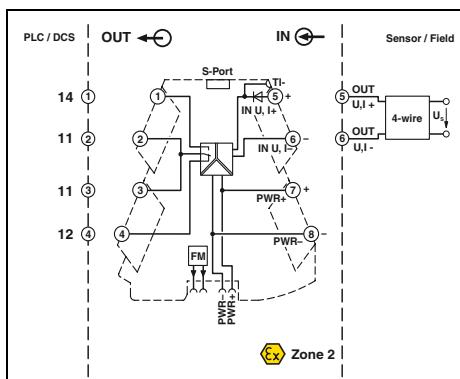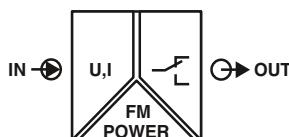

Configurable, with relay PDT output

Ex II 3 G Ex nA nC IIC T4 Gc X
Ex: Ex II 3 G Ex nA nC IIC T4 Gc X

Housing width 6.2 mm

Technical data

Input data

Input signal (configurable using the DIP switch)
Maximum input signal
Input resistance

Specification of the switching point

Switching output

Relay output
Contact material AgSnO₂, hard gold-plated
Max. switching voltage 250 V AC
Limiting continuous current 6 A
Hysteresis (configurable using the DIP switch)
Setting range of the response delay (configurable using the DIP switch)

General data

Supply voltage range 9.6 V DC ... 30 V DC
Nominal supply voltage 24 V DC
Current consumption 40 mA (12 V DC)
20 mA (24 V DC)

1 PDT

Can be set freely via software
0 s ... 10 s (can be set freely via software)

≤ 0.5 W
0.1% (of final value)
0.01%/K

Typically 140 ms (can be set via software)
Reinforced insulation in accordance with IEC 61010-1
IP20

Power consumption

Maximum transmission error

Temperature coefficient

Step response (0 - 99%)

Electrical isolation

Degree of protection

Conformance/approvals

Conformance

ATEX

UL, USA/Canada

CE-compliant

II 3 G Ex nA nC IIC T4 Gc X

UL 508 Listed

Class I, Div. 2, Groups A, B, C, D T4A

Class I, Zone 2, Group IIC T4A

B, B, A, A

- Universally configurable highly-compact threshold value switch for switching analog limit values
- Plug-in connection system
- Safe 3-way isolation
- Standard switching behavior can be configured via DIP switches
- Freely-configurable with software or smartphone app
- PDT relay at output
- Limiting continuous current up to 6 A
- Power supply and fault monitoring possible via DIN rail connector
- Status and error indicator LEDs

Notes:

The configuration software can be downloaded from the Internet: phoenixcontact.net/products.

Information on the programming adapters can be found on page 111

Information on MINI Analog Pro accessories can be found from page 107

DNV GL

Ordering data

Description	Type	Order No.	Pcs./Pkt.
Limit value switch with relay PDT output, standard configuration	Push-in connection	MINI MCR-2-UI-REL-PT	2902035
	Screw connection	MINI MCR-2-UI-REL	2902033
	Push-in connection	MINI MCR-2-UI-REL-PT-C	2909887
	Screw connection	MINI MCR-2-UI-REL-C	2909886

Accessories

Programming adapter for configuring modules with S-PORT interface	IFS-USB-PROG-ADAPTER	2811271	1
USB programming adapter for configuring modules with Windows software	TWN4 MIFARE NFC USB ADAPTER	2909681	1
Bluetooth programming adapter, with USB and S-PORT interface	IFS-BT-PROG-ADAPTER	2905872	1

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

Order key for MINI MCR-2-UI-REL(-PT)(-C) 3-way signal conditioners (standard configuration entered as an example)

Order No. **Input**
Input signal **Start** **End** **Cut-off frequency**

2909886	I	0.0	24.0	15	/ ...
2909886 ≈ MINI MCR-2- UI-REL-C	I ≈ I U ≈ U	0 ≈ 0 mA I: freely selectable between 0.0 ... 23.5 mA	0 ≈ 0 mA I: freely selectable between 1 ... 24 mA	15 ≈ 15 Hz 60 ≈ 60 Hz 240 ≈ 240 Hz	
2909887 ≈ MINI MCR-2- UI-REL-PT-C		U: freely selectable between 0.0 ... 11.5 V	U: freely selectable between 0.5 ... 12 V		

Measuring range span at least 0.5 V/1 mA
Increment 0.1 V/0.1 mA

Output	Switching function	Low switching point (SPL)	High switching point (SPH)	Switch-on delay	Switch-off delay	Error
...	2	-	10	0.0	0.0	0
	0 ≈ L 1 ≈ H 2 ≈ L -->SPH -->H 3 ≈ H -->SPH -->L 4 ≈ L -->SPH -->H -->SPH -->L 5 ≈ H -->SPH -->L -->SPH -->H 6 ≈ L -->SPH -->H -->SPH -->L 7 ≈ H -->SPH -->L -->SPH -->H	-- ≈ Off I: freely selectable between 0.04 ... 23.96 mA	10 ≈ 10 mA I: freely selectable between 0.08 ... 24 mA	0 ≈ 0 sec. t: freely selectable between 0.0 ... 10 sec.	0 ≈ 0 sec. t: freely selectable between 0.0 ... 10 sec.	0 ≈ No response 1 ≈ 0 relay on 2 ≈ 0 relay off



Note:

L = Low (relay off)
H = High (relay on)
SPL = Setpoint Low
SPH = Setpoint High

MCR technology

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

Limit values Temperature

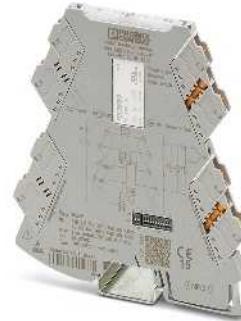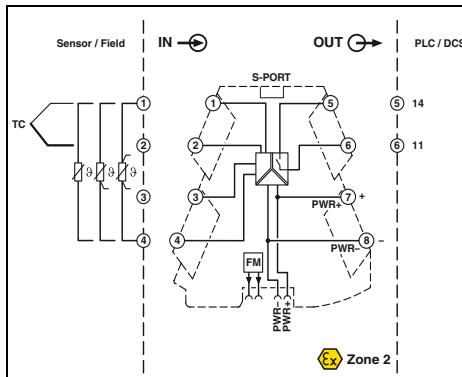

**Configurable,
temperature transducer
with N/O relay output**



Housing width 6.2 mm

Technical data

Input data

Input signal (can be configured using DIP switches)

Temperature range

Measuring range span

Linear resistance measuring range

Switching output

Relay output

Contact material

Max. switching voltage

Maximum switching current

Minimum switching current

Limiting continuous current

Hysteresis

Setting range of the response delay

General data

Supply voltage range

Current consumption

Switching point accuracy

Power consumption

Temperature coefficient

Step response (0 - 99%)

Electrical isolation

EMC note

Conformance/approvals

Conformance

ATEX

UL, USA/Canada

DNV GL

Pt, Ni, Cu sensors : 2-, 3-, 4-conductor

-250°C ... 2500°C

min. 20 K

0 Ω ... 4,000 Ω

1 N/O contact

AgSnO₂, hard gold-plated

250 V AC

6 A (for 250 V AC)

100 mA (12 V DC)

6 A

Can be set freely via software

0 s ... 10 s (can be set freely via software)

9.6 V DC ... 30 V DC

44 mA (12 V DC)

22 mA (24 V DC)

<0.1%

570 mW

0.01% / K

Typically 300 ms

Typically 570 ms

Typically 380 ms

Typically 300 ms

Typically 570 ms

Reinforced insulation in accordance with IEC 61010-1

Class A product, see page 583

CE-compliant

Ex II 3 G Ex nA nC IIC T4 Gc X

UL 508 Listed

Class I, Div. 2, Groups A, B, C, D T4A

Class I, Zone 2, Group IIC T4A

B, B, A, A

Order No.

Pcs./Pkt.

Ordering data

Description

Temperature limit value switches

Push-in connection
Screw connection

MINI MCR-2-T-REL-PT
MINI MCR-2-T-REL

2905633
2905632

1
1

Accessories

Programming adapter for configuring modules
with S-PORT interface

IFS-USB-PROG-ADAPTER

2811271

1

USB programming adapter for configuring modules
with Windows software

TWN4 MIFARE NFC USB ADAPTER

2909681

1

Bluetooth programming adapter, with USB and
S-PORT interface

IFS-BT-PROG-ADAPTER

2905872

1

- Universally configurable, highly-compact temperature limit value switch for switching analog limit values from resistance thermometers and remote resistance-type sensor signals
- For 2-, 3- or 4-conductor RTD sensors in accordance with IEC 751, JIS, GOST
- For thermocouples in accordance with IEC 584 and GOST
- 2-conductor resistance measurement, up to 4,000 Ω
- Internal cold junction compensation
- Plug-in connection system
- Safe 3-way isolation
- Standard behavior can be configured via DIP switches
- Freely configurable via software or smartphone app
- N/O relay output (N/C function can be set via software)
- Limiting continuous current up to 6 A
- Power supply and fault monitoring possible via DIN rail connector
- Status and error indicator LEDs

Notes:



The configuration software can be downloaded from the Internet:
phoenixcontact.net/products.

Information on the programming adapters can be found
on page 111

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

Limit values

Temperature

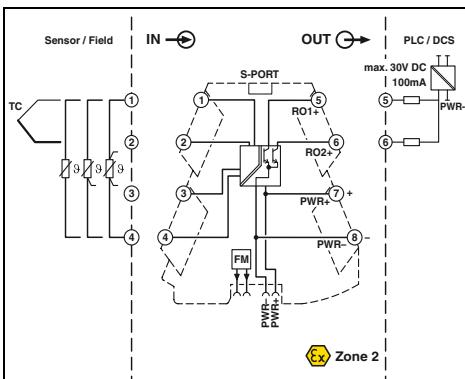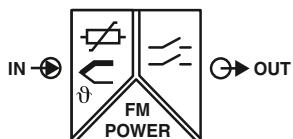

Configurable,
temperature transducer
with transistor output

Ex - EAC
Ex : Ex

Housing width 6.2 mm

Technical data

Input data

Input signal (can be configured using DIP switches)

Temperature range

Measuring range span

Linear resistance measuring range

Switching output

Transistor output

Max. switching voltage

Maximum switching current

General data

Supply voltage range

Current consumption

Switching point accuracy

Power consumption

Temperature coefficient

Step response (0 - 99%)

Electrical isolation

EMC note

Conformance/approvals

Conformance

ATEX

UL, USA/Canada

DNV GL

Pt, Ni, Cu sensors : 2-, 3-, 4-conductor

-250°C ... 2500°C

min. 20 K

0 Ω ... 4,000 Ω

2 N/O contacts

30 V DC

100 mA (30 V (<50°C))

9.6 V DC ... 30 V DC

20 mA (12 V DC)

10 mA (24 V DC)

<0.1%

350 mW

0.01%/K

Typically 300 ms

Typically 570 ms

Typically 380 ms

Typically 300 ms

Typically 570 ms

Reinforced insulation in accordance with IEC 61010-1

Class A product, see page 583

CE-compliant

Ex II 3 G Ex nA IIC T4 Gc X

UL 508 Listed

Class I, Div. 2, Groups A, B, C, D T6

Class I, Zone 2, Group IIC T6

B, B, A, A

Ordering data

Description	Type	Order No.	Pcs./Pkt.
Temperature limit value switches	Push-in connection	MINI MCR-2-T-2RO-PT	2906877
	Screw connection	MINI MCR-2-T-2RO	2906876

Accessories

IFS-USB-PROG-ADAPTER	2811271	1
TWN2 MIFARE NFC USB ADAPTER	2909681	1
IFS-BT-PROG-ADAPTER	2905872	1

- Universally configurable, highly-compact temperature limit value switch for switching analog limit values from resistance thermometers and remote resistance-type sensor signals
- For 2, 3 or 4-conductor RTD sensors in accordance with IEC 751, JIS, GOST
- For thermocouples in accordance with IEC 584 and GOST
- 2-conductor resistance measurement, up to 4,000 Ω
- Internal cold junction compensation
- Plug-in connection system
- Safe 3-way isolation
- Standard behavior can be configured via DIP switches
- Freely configurable via software or smartphone app
- 2 transistor switching contacts on the output
- Maximum switching current 30 V / 100 mA
- Power supply and fault monitoring possible via DIN rail connector
- Status and error indicator LEDs

Notes:

The configuration software can be downloaded from the Internet:
phoenixcontact.net/products.

Information on the programming adapters can be found on page 111



Safely isolated from field to network. MINI Analog Pro signal conditioners with bus and network connections combine the benefits of safe electrical isolation with those of digital communication. With an overall width of less than 50 mm, you can transmit, free of interference, up to eight field signals to industrial networks, without the need for signal-specific input cards.

Further advantages:

- Gateways for different protocols: Modbus/RTU, Modbus/TCP, EtherNet/IP™, and PROFIBUS DP
- Interference-free signal transmission from the field level to the CPU, thanks to safe electrical isolation
- Fast, fault-free wiring, by bundling the signals in one network cable

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology**No need for input cards**

- Cost and space savings, as signal-specific input cards are no longer needed

**Modular and space-saving**

- Space-saving network integration of freely combinable signal conditioners by means of plug-in gateways

**Flexible configuration**


- Quick configuration via rotary coding switch, software, web server or app

**Smart configuration and monitoring**

- Carry out on-site configuration and read current values directly off a smartphone with the MINI Analog Pro app

**Easy startup and service**

- Measure current signals during operation, without disconnecting current loops

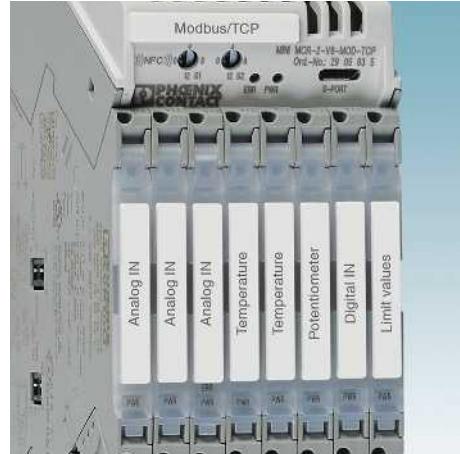**Easy maintenance**

- Large-surface marking areas for standard marking material as well as permanently visible status and error LEDs on each module

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology


MINI Analog Pro gateways

- Easy integration of up to eight field signals into the bus systems
- Any combination of signal conditioners is possible (standard signal, temperature, etc.)
- Easy attachment to the output side of MINI Analog Pro modules
- Huge savings in terms of input cards and bus couplers
- Safe channel-to-channel electrical isolation right through to the CPU
- Versions available with Modbus/RTU or PROFIBUS DP
- Can be configured via software or smartphone app

Notes:

The configuration software can be downloaded from the Internet: phoenixcontact.net/products.

Information on the programming adapters can be found on page 111

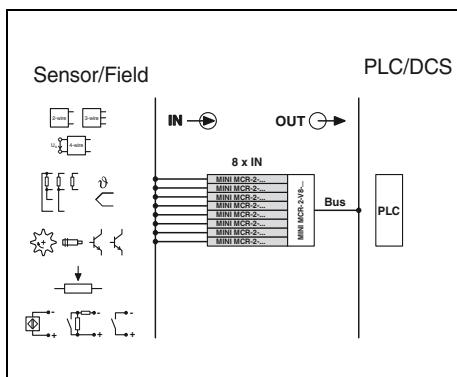

Ex n



Gateway for bus and network connection



EAC



Ex: II 1G

Housing width 51.1 mm

Technical data

Input data	
Number of inputs	8
Configurable/programmable	Yes
Current input signal	4 mA ... 20 mA
Maximum input current	24 mA
Input resistance of current input	50 Ω
Maximum input voltage	5 V
Output data	
Number of outputs	1
Data update rate	15 ms
General data	
Nominal supply voltage range	12 V ... 24 V
Supply voltage range	9.6 V ... 30 V
Power consumption	<1,000 mW
Maximum transmission error	0.1%
Temperature coefficient	0.01%
Test voltage, input/output/supply	0.5 kV
Ambient temperature (operation)	-40°C ... 65°C
Housing material	PBT 7% GF V0
Dimensions W/H/D	51.1 / 104.1 / 56.8 mm
EMC note	Class A product, see page 583
Conformance/approvals	
Conformance	CE-compliant
UL, USA/Canada	UL 61010 Listed Class I, Div. 2, Groups A, B, C, D T5 Class I, Zone 2, Group IIC T5

Ordering data

Description	Type	Order No.	Pcs./Pkt.
For bus and network connection			
Modbus/RTU	MINI MCR-2-V8-MOD-RTU	2905634	1
PROFIBUS DP	MINI MCR-2-V8-PB-DP	2905636	1

Accessories

Programming adapter for configuring modules with S-PORT interface	IFS-USB-PROG-ADAPTER	2811271	1
USB programming adapter for configuring modules with Windows software	TWN4 MIFARE NFC USB ADAPTER	2909681	1
Bluetooth programming adapter , with USB and S-PORT interface	IFS-BT-PROG-ADAPTER	2905872	1

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology


MINI Analog Pro gateways

- Easy integration of up to eight field signals in the bus systems
- Any combination of signal conditioners is possible (standard signal, temperature, etc.)
- Easy attachment to the output side of MINI Analog Pro modules
- Huge savings in terms of input cards and bus couplers
- Safe channel-to-channel electrical isolation right through to the CPU
- Versions available with Modbus/TCP or EtherNet/IP™
- Can be configured via software or smartphone app

Notes:

The configuration software can be downloaded from the Internet:
phoenixcontact.net/products.

Information on the programming adapters can be found
on page 111

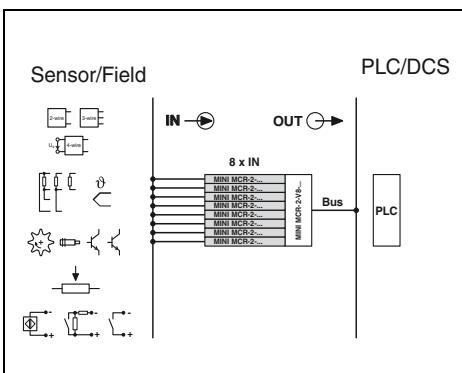

Gateway for bus and network connection



Housing width 51.1 mm

Technical data

Number of inputs	8
Configurable/programmable	Yes
Current input signal	4 mA ... 20 mA
Maximum input current	24 mA
Input resistance of current input	50 Ω
Maximum input voltage	5 V

Number of outputs	1
Data update rate	15 ms

General data	
Nominal supply voltage range	12 V ... 24 V
Supply voltage range	9.6 V ... 30 V
Power consumption	<1200 mW
Maximum transmission error	0.1%
Temperature coefficient	0.01%
Test voltage, input/output/supply	0.5 kV
Ambient temperature (operation)	-40°C ... 55°C
Housing material	PBT 7% GF V0
Dimensions W/H/D	51.1 / 104.1 / 61 mm
EMC note	Class A product, see page 583
Conformance/approvals	
Conformance	CE-compliant
UL, USA/Canada	UL 508 Listed Class I, Div. 2, Groups A, B, C, D T5 Class I, Zone 2, Group IIC T5

Ordering data

Description	Type	Order No.	Pcs./Pkt.
Gateways for bus and network connection Modbus/TCP	MINI MCR-2-V8-MOD-TCP	2905635	1

Accessories

Programming adapter for configuring modules with S-PORT interface	IFS-USB-PROG-ADAPTER	2811271	1
USB programming adapter for configuring modules with Windows software	TWN4 MIFARE NFC USB ADAPTER	2909681	1
Bluetooth programming adapter, with USB and S-PORT interface	IFS-BT-PROG-ADAPTER	2905872	1

System cabling solutions for your MINI Analog Pro signal conditioners



System cabling adapter for plugging on to up to eight MINI Analog Pro signal conditioners

Thanks to its innovative plug-in concept, the MINI MCR-2-V8-FLK 16 system adapter offers a time-saving wiring solution. Eight MINI Analog Pro signal converters connect easily to a controller using pluggable system cabling. This leads to a considerable reduction in cabling effort and the risk of wiring errors compared to individual wiring on the controller side: Using the system cabling allows you to connect the MINI Analog Pro modules by simply plugging them on to the PLC.

The FLK 16 system adapter also offers all the advantages of gateways to bus and network connection, such as configuration and readout of measurement values over NFC, continuous measurement of currents, a generous marking area, and always visible diagnostic and status LEDs.

Further advantages:


- Plug and Play solution for your MINI Analog Pro signal conditioners
- Safe galvanic isolation per channel combined with major time and cost savings
- Saves space, thanks to modular plugging of the system cabling adapter

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

**Termination Carriers for your
MINI Analog Pro signal conditioners**



Select standard DIN rail device

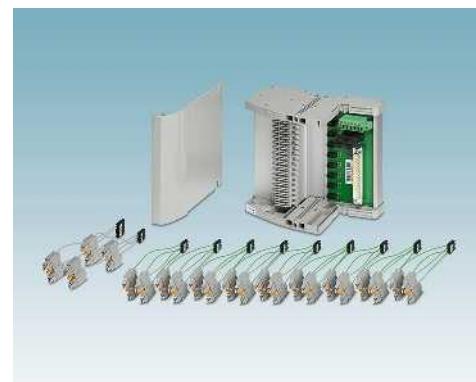

Select module carrier

TC... Termination Carriers are compact solutions for conveniently and smoothly connecting standard DIN rail signal conditioners from the MINI Analog Pro series to input and output cards of automation systems using system cabling. Termination Carriers are also available for MACX Analog and PSR safety devices.

The most compact signal conditioners combined with the most compact and flexible module carriers on the market enable you to achieve a hitherto unparalleled packing density in your control cabinet together with professional system cabling.

Compact

- The compact design combined with MINI Analog saves up to 65% of space in the control cabinet

Rugged and reliable

- Stable, vibration-resistant aluminum carrier device profile
- PCB is completely decoupled from signal conditioners
- PCB without active electronics
- Redundant supply via separate DIN rail module
- Horizontal or vertical DIN rail mounting

Flexible

- Profile sections without pitch markings
- Quick and safe module connection with plug-in cable sets
- Horizontal or vertical DIN rail mounting
- Can be flexibly adapted to suit any controller or higher-level control system
- Solutions tailored to your requirements on request
- Available pre-assembled with modules and wired, or for self-assembly




Select controller-specific front adapter and system cable

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

MINI Analog Pro system adapters

- Time-saving wiring solution thanks to unique plug-in concept
- System cabling on PLC side
- Plug-and-Play
- For up to eight channels
- Reduces wiring costs and errors
- Easy attachment to the output side of MINI Analog Pro modules
- Especially easy to maintain, thanks to interruption-free current measurement function

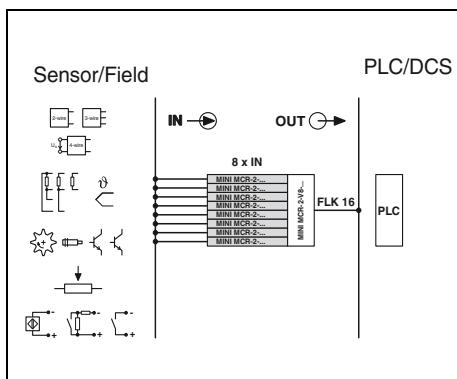

System cabling adapter

CE EAC
Ex: Ex n
Housing width 51.1 mm

Technical data

Input data	
Number of inputs	8
Configurable/programmable	no
Maximum input current	4 A (500 mA per ch.)
Maximum input voltage	30 V
Output data	
Number of outputs	8
Connection method	IDC/FLK pin strip
Configurable/programmable	no
General data	
Test voltage input/output	0.5 kV
Rated insulation voltage	50 V _{rms}
Degree of protection	IP20
Overvoltage category / Degree of pollution	II / 2
Ambient temperature (operation)	-40°C ... 70°C
Humidity	5% ... 95%
Maximum altitude for use above sea level	4,000 m
Housing material	PBT 7% GF V0
Dimensions W/H/D	51.1 / 104.1 / 56.8 mm
Conformance/approvals	
Conformance	CE-compliant
ATEX	Ex II 3 G Ex nA IIC Gc U
UL, USA/Canada	UL 61010 Listed Class I, Div. 2, Groups A, B, C, D T5 Class I, Zone 2, Group IIC T5
GL	GL applied for

Ordering data

Description	Type	Order No.	Pcs./Pkt.
System cabling adapter for MINI Analog Pro modules	MINI MCR-2-V8-FLK 16	2901993	1

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

Termination Carriers for your
MINI Analog Pro signal conditioners**The TC-D37SUB-ADIO16-MP-P-UNI**

universal Termination Carrier is a compact solution which connects signal conditioners from the MINI Analog Pro series to analog or binary input and output cards of automation systems.

The TC-D37SUB-AIO16-MP-PS-UNI


Termination Carrier design, when combined with the MACX MCR-S-MUX HART multiplexer, also enables communication between HART-compatible field devices and a management system.

- Connection of up to 16 single-channel signal conditioners
- Universal 1:1 signal routing to a 37-pos. D-SUB connector
- For system cables with D-SUB socket and open ends for universal connection
- Redundant supply and monitoring via separate MINI MCR-2-PTB-PT feed-in terminal and MINI MCR-2-FM-RC-PT fault signaling module

Notes:

Contact us: together, we can develop optimum solutions for your automation system with the Termination Carrier for MINI Analog Pro.

TC-D37SUB-ADIO16-MP-P-UNI (Order No. 2906639) is not a class A product.

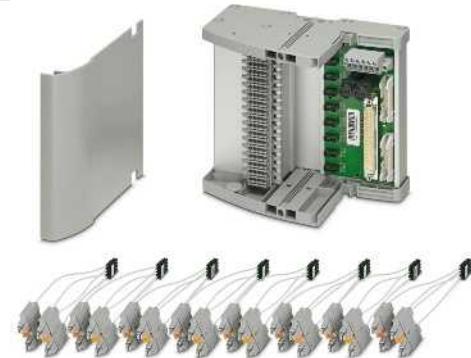

• EAC
Ex: • I_{Ex}
Housing width 136 mm

Technical data**General data**

Connection to the control system level

No. of pos.

Maximum operating voltage

Maximum permissible current

Rated insulation voltage

Rated surge voltage

Degree of pollution

Oversupply category

Air clearances and creepage distances

Ambient temperature range

Shock

Vibration (operation)

Dimensions W/H/D

Power supply via power module

Input voltage range

Redundant supply

Polarization and surge protection

Fuse

Status indication

Switching output

D-SUB pin strip

37

<30 V DC (per signal/channel)

23 mA (signal/channel)

50 V (basic insulation)

0.5 kV

2

II

DIN EN 50178 (basic insulation)

-20°C ... 60°C (please observe module specifications)

15g, in accordance with IEC 60068-2-27

2g, in accordance with IEC 60068-2-6

136 / 170 / 160 mm

19.2 V DC ... 30 V DC

Yes, decoupled from diodes

Yes

2x 2.5 A on PCB, slow-blow (replaceable)

2 x red LED (error)

2x green LEDs (PWR1 and PWR2)

1 N/C contact (alarm = open)

Ordering data**Description****Type****Order No.****Pcs./Pkt.**

Module carrier for 16 MINI Analog channels, power and feed-through module
- With connection for MACX MCR-S-MUX HART multiplexer

TC-D37SUB-AIO16-MP-PS-UNI

2906640

1

TC-D37SUB-ADIO16-MP-P-UNI

2906639

1

Accessories

MINI MCR-2-PTB-PT

2902067

1

MINI MCR-2-FM-RC-PT

2904508

1


MACX MCR-S-MUX

2865599

1

MINI Analog Pro power terminal block**MINI Analog Pro error signaling module**

HART multiplexer, 32-channel, including two 14-conductor flat-ribbon cable

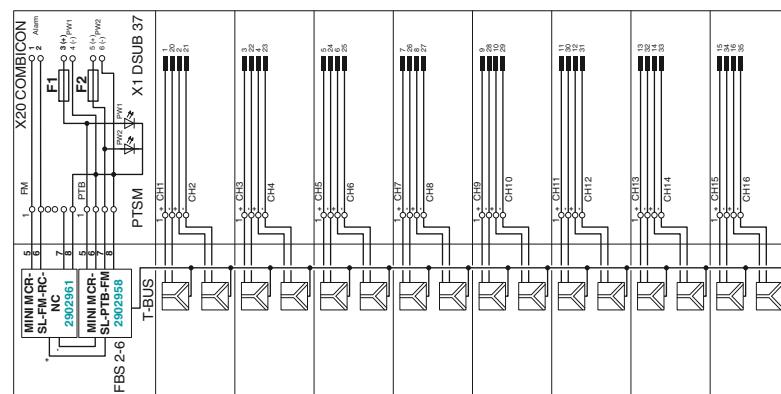



TC-D37SUB-ADIO16-M-P-UNI and TC-D37SUB-AIO16-M-PS-UNI connection scheme

MCR technology

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

Accessories

Constant voltage/constant current sources

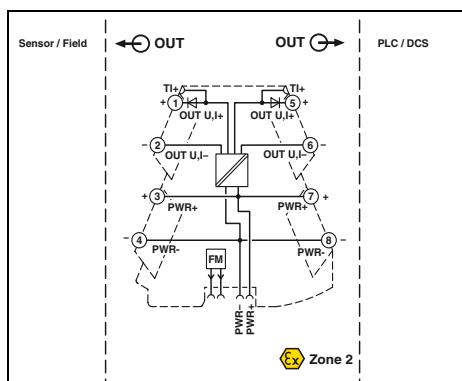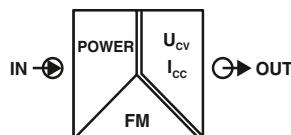

Ex n

D W H



Configurable output signals



Ex:

Housing width 6.2 mm

Technical data

- Constant voltage/constant current source for potentiometers, measuring bridges, encoders, etc.
- Plug-in connection system
- Highly precise
- Output signals can be configured via DIP switches
- Input signal corresponds to power supply
- Input signal and therefore energy supply and fault monitoring via the DIN rail connector
- For voltages up to 10 V and currents up to 20 mA
- Status LED

Input data	9.6 ... 30 V	
Input signal	U output	I output
Output data	10 V DC	20 mA
	8.75 V DC	17.5 mA
	7.5 V DC	15 mA
	6.25 V DC	12.5 mA
	5 V DC	10 mA
	3.75 V DC	7.5 mA
	2.5 V DC	5 mA
	1.25 V DC	2.5 mA
Short-circuit current	>32 mA	
Ripple	<20 mV _{pp} (at 600 Ω)	
General data	9.6 V DC ... 30 V DC	
Supply voltage range	<1.1 W (9.6 V DC)	
Power consumption	≤0.1% (of final value)	
Maximum transmission error	<0.01%K	
Temperature coefficient	Reinforced insulation in accordance with IEC 61010-1	
Electrical isolation	IP20	
Degree of protection	Class A product, see page 583	
EMC note		
Conformance/approvals	CE-compliant Ex II 3 G Ex nA IIC T4 Gc X	
Conformance	UL 508 Listed	
ATEX	Class I, Div. 2, Groups A, B, C, D T6	
UL, USA/Canada	Class I, Zone 2, Group IIC T6	
B, B, A, A		

DNV GL

Description	Type	Order No.	Pcs./Pkt.
Constant voltage/constant current source	MINI MCR-2-CVCS-PT	2902065	1
	MINI MCR-2-CVCS	2902064	1
Accessories			
Setpoint potentiometer, to set setpoints individually	EMG 30-SP- 4K7LIN	2940252	10
Resistance value 4.7 kΩ	EMG 30-SP-10K LIN	2942124	10

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

Accessories

Connector set

- FASTCON Pro connector set
- Consisting of four connectors, one each for every position on the module
- Suitable for all MINI Analog Pro modules
- Four-way coding prevents incorrect insertion into the device
- Screw or Push-in connection technology



With Push-in connection





With screw connection

Technical data		Technical data		
Connection data solid/stranded/AWG		Ordering data		
Description	Type	Order No.	Pcs./Pkt.	Type
FASTCON Pro connector set - with Push-in connection - with screw connection	FASTCON PRO-SET-PT	2906228	1	FASTCON PRO-SET

Accessories,
constant voltage sources

new

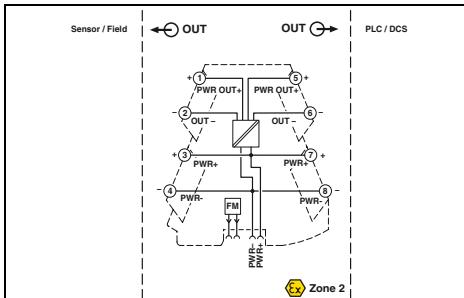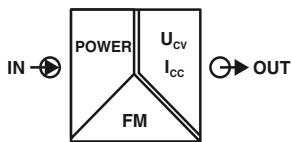

- Sensor feed from 2-conductor or 3-conductor 15 V / 30 mA sensors
- 15 V constant voltage source for sensors, encoders, etc.
- Plug-in connection system
- Input signal corresponds to power supply
- Input signal and therefore energy supply and fault monitoring via the DIN rail connector
- Status LED

Technical data			
Input data	9.6 ... 30 V	Output data	I output
Input signal	15 V DC	Output data	>35 mA
Output data	<20 mV _{PP} (at 600 Ω)	Short-circuit current	Class A product, see page 583
Output signal (can be configured using DIP switches)	CE-compliant	Ripple	EMC note
Short-circuit current	Ex II 3 G Ex nA IIC T4 Gc X	General data	Conformance/approvals
Ripple	UL 508 Listed	ATEX	Conformance
General data	Class I, Div. 2, Groups A, B, C, D T6	UL, USA/Canada	ATEx
EMC note	Class I, Zone 2, Group IIC T6	Conformance	UL, USA/Canada
Conformance/approvals			
Conformance			
ATEX			
UL, USA/Canada			

Ordering data			
Description	Type	Order No.	Pcs./Pkt.
Constant voltage source with Push-in connection	Push-in connection	MINI MCR-2-SPS-24-15-PT	1
with screw connection	Screw connection	MINI MCR-2-SPS-24-15	1

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

Accessories

DIN rail connectors for bridging the supply voltage

ME 6,2 TBUS

- Module replacement without interrupting the supply to the remaining modules (hot swappable)
- One DIN rail connector for two MINI Analog Pro modules



For bridging the supply voltage



For system power supply

ME 17,5 TBUS

- For use with a MINI POWER system power supply unit

Description
DIN rail connector , for bridging the supply voltage, can be snapped onto 35 mm DIN rails in accordance with EN 60715, UL-approved Color: gray Color: green DIN rail connector , for bridging the supply voltage, can be snapped onto 35 mm DIN rails as per EN 60715, with UL approval, two pieces are required per system power supply
Color: green

Ordering data		Ordering data			
Type	Order No.	Pcs./Pkt.	Type	Order No.	Pcs./Pkt.
ME 6,2 TBUS-2 1,5/5-ST-3,81 GY ME 6,2 TBUS-2 1,5/5-ST-3,81 GN	2695439 2869728	10 10	ME 17,5 TBUS 1,5/ 5-ST-3,81 GN	2709561	10

Accessories

System power supplies

- For supplying the supply voltage via the DIN rail connector where AC voltages are available
- Nominal input voltage range 100 ... 240 V AC
- 24 V DC output voltage
- For up to 60 MINI Analog modules
- For up to 1.5 A, secondary
- Status and error signaling via diagnostic LEDs



For applications with local voltages of over 100 V



Ordering data			
Description	Type	Order No.	Pcs./Pkt.
System power supply , primary-switched, with zone 2 approval. Further information can be found in Catalog 4, surge protection and power supplies.	MINI-PS-100-240AC/24DC/1.5/EX	2866653	1
System power supply , primary-switched (not for zone 2). You can find further information in Catalog 4, surge protection and power supplies.	MINI-SYS-PS-100-240AC/24DC/1.5	2866983	1

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

Accessories

Power terminal blocks

- Power terminal block for supplying the supply voltage to the DIN rail connector
- Plug-in connection system
- Increased output current of 3.2 A
- For up to 115 MINI Analog Pro modules
- Monitoring of supplies in combination with the fault monitoring module
- Flexible redundant supply from one or both module sides
- Status and error indicator LEDs

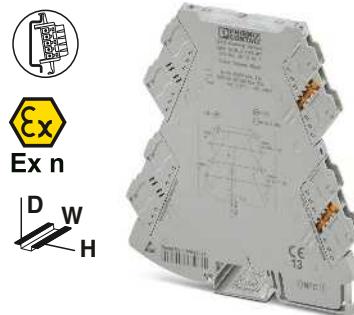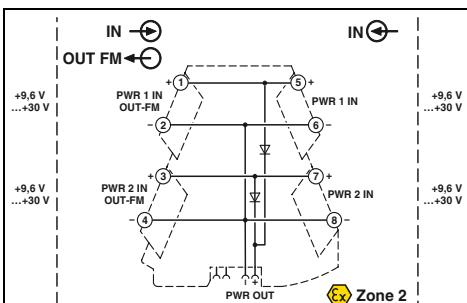

Redundant supply for existing 24 V

Notes:

Pay attention to the supply instructions for the MINI and MACX modules.

Input data/output data

Input voltage range

Output voltage

Output current

General data

EMC note

Conformance/approvals

Conformance

ATEX

UL, USA/Canada

DNV GL

Technical data

9.9 V DC ... 30 V DC

9.6 V DC ... 29.7 V DC

≤3.2 A

Class A product, see page 583

CE-compliant

Ex II 3 G Ex nA IIC T4 Gc X

UL 508 Listed

Class I, Div. 2, Groups A, B, C, D T6

Class I, Zone 2, Group IIC T6

C, EMC2

Ordering data

Description

Type

Order No.

Pcs./Pkt.

MINI Analog Pro power terminal block

Push-in connection

Screw connection

MINI MCR-2-PTB-PT

2902067

1



MINI MCR-2-PTB

2902066

1

Accessories

Setpoint potentiometers

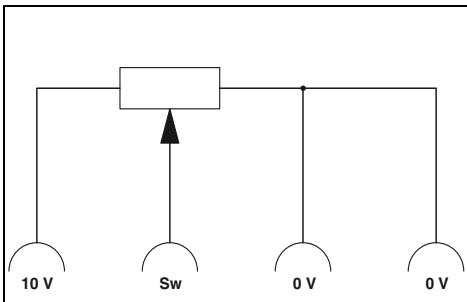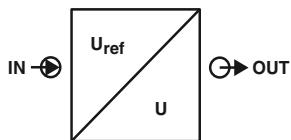

Technical data

EMG 30-SP- 4K7LIN

EMG 30-SP-10K LIN

4.7 kΩ ±20%

10 kΩ ±20%

5% (of final value)

5% (of final value)

0.5 W

0.5 W

0°C ... 40°C

Any

Polycarbonate fiber reinforced PC-F

30 / 75 / 68 mm

0.2 ... 4 mm² / 0.2 ... 2.5 mm² / 24 - 14

Ordering data

Description

Type

Order No.

Pcs./Pkt.

Setpoint potentiometer, to set setpoints individually

Resistance value 4.7 kΩ

EMG 30-SP- 4K7LIN

2940252

10

Resistance value 10 kΩ

EMG 30-SP-10K LIN

2942124

10

- For direct setpoint definition in combination with a constant voltage source


MCR technology

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

Accessories

Feed-through terminal blocks

- Feed-through terminal block for 1:1 forwarding of signals that are already electrically isolated in the MINI Analog Pro group
- Plug-in connection system

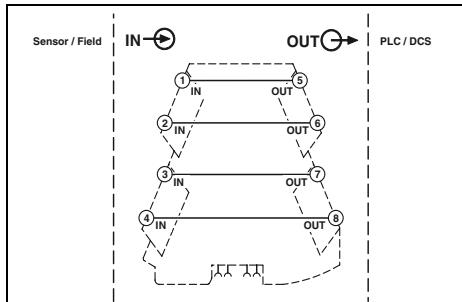

For signals already electrically isolated

Technical data

General data	
Degree of protection	IP20
Ambient temperature (operation)	-40°C ... 70°C
Mounting	any
Housing material	PBT
Dimensions W/H/D	6.2 / 110.5 / 120.5 mm
Screw connection rigid / flexible / AWG	0.2 ... 1.5 mm ² / 0.2 ... 1.5 mm ² / 24 - 12
Conformance/approvals	CE-compliant
Conformance	Ex II 3 G Ex nA IIC T4 Gc X
ATEX	UL 508 Listed
UL, USA/Canada	Class I, Div. 2, Groups A, B, C, D T6
Class I, Zone 2, Group IIC T6	C, EMC2
DNV GL	


Ordering data

Description	Type	Order No.	Pcs./Pkt.
MINI Analog Pro feed-through terminal block Screw connection	MINI MCR-2-TB	2902068	1

Accessories

Error message modules

- Fault monitoring module for evaluating and reporting group errors from the fault monitoring system
- Monitoring of up to 115 connected MINI Analog Pro modules
- Plug-in connection system
- Monitoring of supply voltages of MINI MCR-2-PTB(-PT) power terminal blocks
- Drawing off the supply is possible
- Fault signaling via an N/C contact
- Status and error indicator LEDs
- CE-compliant

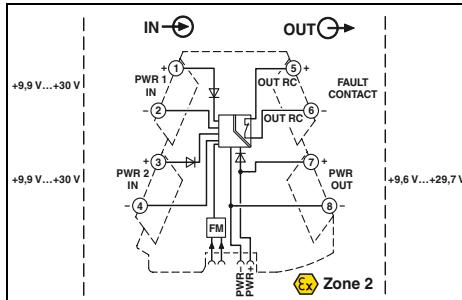

For group error message and supply monitoring

Technical data

Input data/output data	9.9 V DC ... 30 V DC
Input signal	9.6 V DC ... 29.7 V DC
Output signal	
Switching output	
Max. switching voltage	30 V DC
Maximum switching current	50 mA
General data	1.5 kV AC (50 Hz, 1 min.)
Test voltage input/output	Class A product, see page 583
EMC note	
Conformance/approvals	Ex II 3 G Ex nA IIC T4 Gc X
ATEX	UL 508 Listed
UL, USA/Canada	Class I, Div. 2, Groups A, B, C, D T6
Class I, Zone 2, Group IIC T6	C, EMC2
DNV GL	

Ordering data

Description	Type	Order No.	Pcs./Pkt.
MINI Analog Pro error signaling module Push-in connection	MINI MCR-2-FM-RC-PT	2904508	1
Screw connection	MINI MCR-2-FM-RC	2904504	1

MINI Analog Pro – Highly compact signal conditioners with plug-in connection technology

Accessories

Programming adapters

IFS-USB-PROG-ADAPTER programming adapter for configuring Phoenix Contact INTERFACE modules with S-PORT interface.

The adapters are used with the FDT/DTM or the ANALOG-CONF software. For programming the MACX Analog, MINI Analog Pro, and MINI Analog.



Technical data			
Class A product, see page 583			
Description	Type	Order No.	Pcs./Pkt.
Programming adapter for configuring modules with S-PORT interface	IFS-USB-PROG-ADAPTER	2811271	1
Bluetooth programming adapter, with USB and S-PORT interface	IFS-BT-PROG-ADAPTER	2905872	1

Accessories

Marking labels for transparent cover

- Snap-in labels and adhesive labels with large-area for marking
- For snapping into or sticking onto MINI Analog Pro covers, without overlapping the status and error LEDs
- The sheets can be marked quickly and easily using the BLUEMARK CLED and the THERMOMARK CARD...
- They can also be custom printed in accordance with customer requirements



Unlabeled or labeled in accordance with customer specifications

Ordering data			Ordering data			
Description	Type	Order No.	Pcs./Pkt.	Type	Order No.	Pcs./Pkt.
UniCard, for marking the CLIPFIX 35-5, 24-part end brackets, 8 individual labels per strip, lettering field size: 30 x 5 mm	white	UCT-EM (30X5)	0801505	10		
Lettering field size: 30 x 5 mm	white	UCT-EM (30X5) CUS	0801589	1		
10-section, lettering field size: 15 x 5 mm	white	UC-EMLP (15X5)	0819301	10		
10-section, lettering field size: 15 x 5 mm	white	UC-EMLP (15X5) CUS	0824550	1		
Continuous labels, can be marked with thermal transfer printer, can be separated with a cutter, pitch as desired, strip length up to 1,000 mm				SK 5,0 WH:REEL	0805221	1
1 roll = 90 m continuous, height: 5.0 mm, 10 strips	white					



Reliable and safe

In all phases of the product lifecycle, MACX signal conditioners have been developed and produced in accordance with IEC 61508 standards for functional safety. This ensures the highest level of safety for your machines and systems. Save planning and operating costs by combining high signal flexibility with comprehensive SIL certification.



From the cost-effective standard signal conditioner to multifunctional universal devices, MACX signal conditioners provide you with comprehensive solutions for signal processing.

In addition to being SIL-certified, certain MACX signal conditioners also feature performance level PL d. This means that you can integrate analog signals easily into your safety application in accordance with the Machinery Directive.

Versions with PL d and Ex i approval are also available.



All Ex i versions are SIL-certified and also have ATEX and IECEx approval. Single and two-channel signal isolators are available for intrinsically safe circuits up to zone 0 and zone 20 and for all gas and dust groups – with an overall width of just 12.5 mm. The products are type-tested by an independent NAMUR test laboratory in accordance with NE 95, ensuring that they satisfy the high requirements of the chemical industry.

MACX Analog – Signal conditioners with functional safety and explosion protection

**Reliable and safe**

Highest safety for your machines and systems.

Phoenix Contact meets the requirements of functional safety in accordance with IEC 61508 in a standardized development process. We take measures for fault avoidance and fault control into consideration, from the development and production of a device up to device operation.

**Precise, interference-free signal transmission and long service life**

- Patented transmission concept with safe electrical isolation
- Low power consumption and self-heating

**Easy configuration and monitoring**

- Either via FDT/DTM or alternatively with user-friendly stand-alone software – with integrated monitoring function
- Or without software via DIP switches on the housing front

**Intelligent concept for supply and diagnostics**

- 24 Volt power bridging via DIN rail connector for easy wiring, system expansion, or hot-swap module replacement. Direct feed via a MACX module or via supply and fault reporting module with the option of redundant, diode-decoupled supply and fault reporting
- Wide-range power supply: Versions with wide range input for direct installation in all power supply networks – anywhere in the world with no additional power supply unit required

**Fast, error-free signal connection**

- Compact Termination Carriers for quickly and smoothly connecting MACX DIN rail devices to automation system input and output cards using preassembled VARIOFACE system cabling – Plug and Play
- Saves up to 30% of space when compared to other solutions on the market
- High system availability, thanks to robust aluminum profile with mechanically decoupled PCB
- Easy to service, with a single engineering design for both DIN rail and system applications

**Easy-maintenance connection technology**

- Plug-in connection technology, with either screw connection or a spring-cage version with fast Push-in technology
- Coding and clear marking ensure reliable protection against polarity reversal and prevent unintentional mismatching of pre-conductord connection terminal blocks
- Integrated sockets for testing, or for connecting to HART communicators, for example

MACX Analog – Signal conditioners with functional safety and explosion protection

Intrinsically safe signal transmission in potentially explosive areas

Many process technology systems have areas where potentially explosive atmospheres may occur. As such, measuring and control circuits around the world are usually designed with intrinsic safety protection (Ex i).

The **intrinsic safety type of protection**, as opposed to other types of protection (such as increased safety, or Ex e), refers not only to an individual item of equipment but to the entire circuit. A circuit is described as intrinsically safe if the current and voltage are limited to such an extent that no spark or thermal effect can cause a potentially explosive atmosphere to ignite.

An intrinsically safe circuit typically consists of at least one item of intrinsically safe equipment (field device) and one item of

associated equipment (Ex i signal conditioner) and the connecting cables. Intrinsically safe equipment and intrinsically safe parts of associated items of equipment are classed in accordance with IEC/EN 60079-11 in safety levels ia, ib, and ic. The demonstration of intrinsic safety that the user is required to carry out as described in IEC/EN 60079-14, among others, serves to ensure that the interconnection described above is intrinsically safe.

This type of protection offers the user the following advantages, among others:


- Service and conversions while the system is operating requiring no special permits
- Cost-effective, thanks to the lack of expensive housing designs
- Ex i field devices and Ex i signal conditioners can be combined regardless of manufacturer

See our free brochure for detailed information on the topic of explosion protection:

https://www.phoenixcontact.com/assets/downloads_ed/global/web_dwl_promotion/5149416_EN_HQ_Explosion_protection_LoRes.pdf

Order No. 5149416

Installation examples for intrinsically safe circuits:

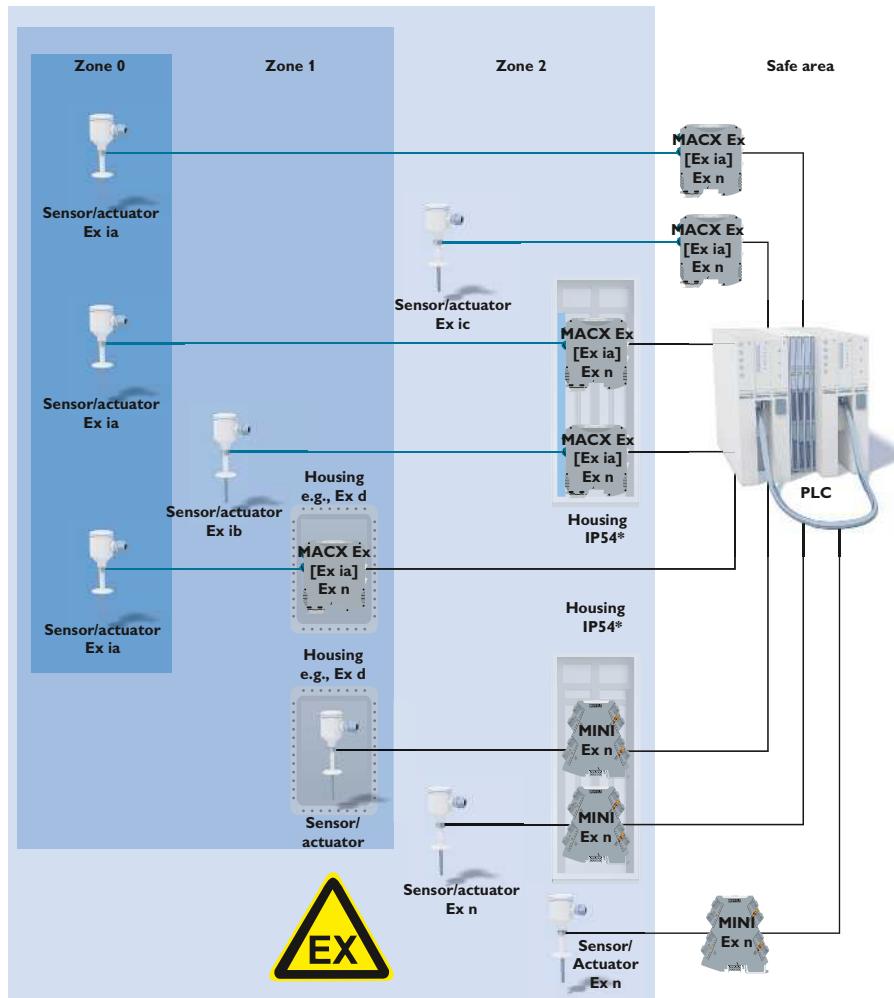

MACX Analog – Signal conditioners with functional safety and explosion protection

Functional safety (SIL)

The term SIL (safety integrity level) is an important one in the field of process technology. It defines the requirements that a device or a system is expected to fulfill so that the failure probability can be specified. If a device or system fails, a defined safe state is attained.

The basic standard **IEC 61508** “Functional safety of electrical/electronic/programmable electronic safety-related systems” describes the requirements that manufacturers must take into consideration for their devices or systems.

The standard **IEC 61511** “Functional safety – Safety instrumented systems for the process industry sector” describes the requirements for constructing systems with functional safety. The operator, proprietor, and planner are responsible for complying with this standard in observance of national regulations.

The attached table is an excerpt from IEC 61508 and IEC 61511 and describes the correlation between the average probability of failure and the SIL level of the safety instrumented function (SIF) attained and the reduction in risk.


Functional safety (PL)

The term Performance Level (PL) in accordance with EN ISO 13849 refers to safety of machinery. The attached table depicts the correlation between the required Performance Level (PL) and the average probability of a dangerous failure per hour (PFH_d).

PL Performance level	PFH_d Probability of dangerous failure on average per hour
PL a	$10^{-5} \leq PFH_d < 10^{-4}$
PL b	$3 \times 10^{-6} \leq PFH_d < 10^{-5}$
PL c	$10^{-6} \leq PFH_d < 3 \times 10^{-6}$
PL d	$10^{-7} \leq PFH_d < 10^{-6}$
PL e	$10^{-8} \leq PFH_d < 10^{-7}$

SIL Safety Integrity Level	PFH_{avg} Low demand mode (average probability of failure of the function on demand)	PFH High demand mode (Probability of a dangerous failure per hour)	RRF Risk reduction factor (Risk Reduction Factor)
SIL 1	$\geq 10^{-2} \dots < 10^{-1}$	$\geq 10^{-4} \dots < 10^{-5}$	$\leq 100 \dots > 10$
SIL 2	$\geq 10^{-3} \dots < 10^{-2}$	$\geq 10^{-7} \dots < 10^{-6}$	$\leq 1,000 \dots > 100$
SIL 3	$\geq 10^{-4} \dots < 10^{-3}$	$\geq 10^{-8} \dots < 10^{-7}$	$\leq 10,000 \dots > 1,000$
SIL 4	$\geq 10^{-5} \dots < 10^{-4}$	$\geq 10^{-9} \dots < 10^{-8}$	$\leq 100,000 \dots > 10,000$



Furthermore, parameters such as category, degree of diagnostic coverage (DC), and mean time to dangerous failure ($MTTF_d$) must be taken into consideration for safety of machinery in accordance with EN ISO 13849.

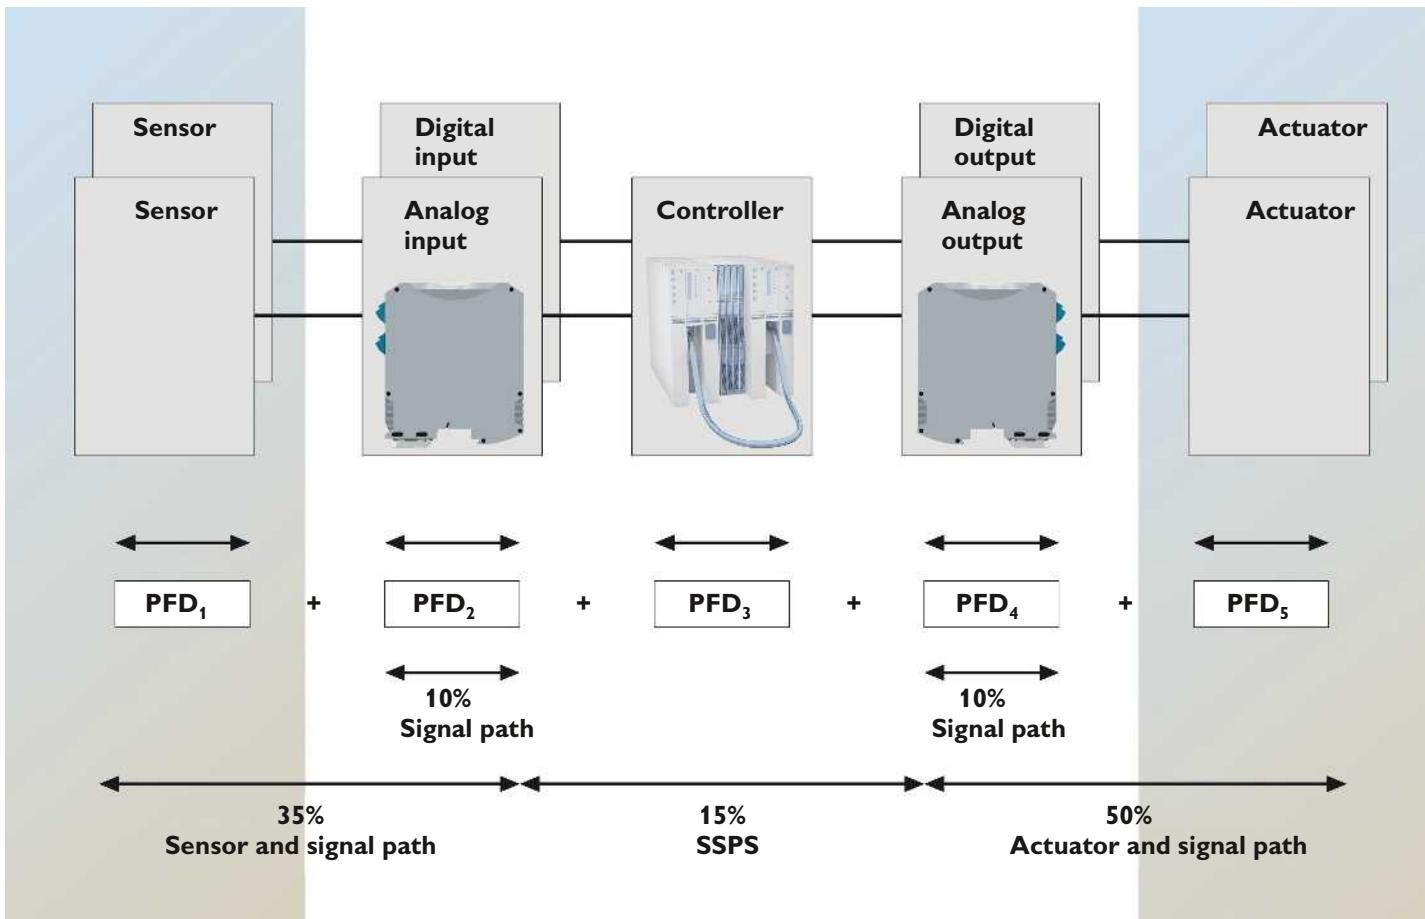

Example of error distribution in a safety-related closed-loop control circuit with low demand rate in accordance with IEC 61508

MACX Analog – Signal conditioners with functional safety

Analog IN/Analog OUT 3-way signal conditioners

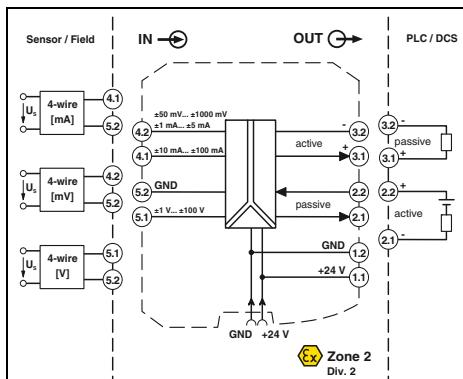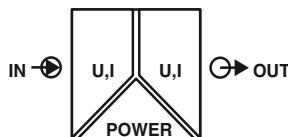

3-way signal conditioner, universal, configurable, over 1600 signal combinations

Functional Safety

Ex: Ex II 3 G Ex nA IIC T4 Gc

Housing width 12.5 mm

Technical data

Input data

Input signal (configurable using the DIP switch)

U input

0 ... 10 V, please indicate if different setting when ordering
0 ... 1 mA, configurable via DIP switches

I input

± 100 V
Approx. 1 MΩ
(± 1 V DC ... ± 100 V DC)

U output

0 ... 10 V, configurable via DIP switches
0 ... 20 mA, please indicate if different setting when ordering

± 100 mA
Approx. 10 Ω
(± 10 mA DC ... ± 100 mA DC)

± 100 V

Approx. 1 MΩ

(± 1 V DC ... ± 100 V DC)

I output

0 ... 10 V, please indicate if different setting when ordering

0 ... 20 mA

please indicate if different setting when ordering

± 100 mA

please indicate if different setting when ordering

Output data

Output signal (configurable using the DIP switch)

Load R_B

Load R_B

≥ 1 kΩ (10 V)
≤ 600 Ω (20 mA; active)
passive: ≤(UB-2 V) / I_{outmax}

General data

Supply voltage range

12 V DC ... 24 V DC (-20% ... +25%)

Power dissipation

<0.7 W (at 24 V DC / 20 mA)

Maximum transmission error

≤0.1% (compared to the final value)

Temperature coefficient

0.0075%/K

ZERO / SPAN adjustment

± 4% / ± 4%

Limit frequency (3 dB)

10 kHz (can be switched to 30 Hz)

Step response (10-90%)

35 µs (at 10 kHz)

11 ms (at 30 Hz)

Electrical isolation

Input/output/power supply

12.5 V (50 Hz, 1 min., test voltage)

300 V_{rms} (rated insulation voltage (overvoltage category II); degree of pollution 2, safe isolation as per EN 61010-1))

2.5 kV (50 Hz, 1 min.)

IP20

-20°C ... 70°C

any

PA 6.6-FR

12.5 / 99 / 114.5 mm

0.2 ... 2.5 mm² / 0.2 ... 2.5 mm² / 24 - 14

0.2 ... 1.5 mm² / 0.2 ... 1.5 mm² / 24 - 16

Test voltage, input/output/supply

Degree of protection

Ambient temperature (operation)

Mounting

Housing material

Dimensions W/H/D

Screw connection rigid / flexible / AWG

Push-in connection rigid / flexible / AWG

EMC note

Conformance/approvals

Conformance

CE-compliant

ATEX

Ex II 3 G Ex nA IIC T4 Gc

IECEx

Ex nA IIC T4 Gc

UL, USA/Canada

UL 61010 Listed

Class I, Div. 2, Groups A, B, C, D T6

Class I, Zone 2, Group IIC

2

SIL in accordance with IEC 61508

Ordering data

Description	Type	Order No.	Pcs./Pkt.
3-way signal conditioner, for electrical isolation of analog signals			
Order configuration	Screw connection	MACX MCR-UI-UI	2811284
Order configuration	Push-in connection	MACX MCR-UI-UI-SP	2811572
Standard configuration	Screw connection	MACX MCR-UI-UI-NC	2811446
Standard configuration	Push-in connection	MACX MCR-UI-UI-SP-NC	2811556


Notes:
To order a product with an order configuration, enter the required configuration by referring to the adjacent order key.
Information about the supply and error evaluation module as well as about the DIN rail connectors and marking material can be found from page 175

MACX Analog – Signal conditioners with functional safety


Order key for MACX MCR-UI-UI-(SP) (standard configuration entered as an example)

Order No.	Input	Output	Cut-off frequency	Factory calibration certificate (FCC)
2811284	IN03	OUT01	10K	NONE
2811284 ≈ MACX MCR-UI-UI	IN40 ≈ 0 ... 50 mV IN24 ≈ 0 ... 60 mV IN41 ≈ 0 ... 75 mV IN25 ≈ 0 ... 100 mV IN43 ≈ 0 ... 120 mV IN26 ≈ 0 ... 100 mV IN44 ≈ 0 ... 150 mV IN27 ≈ 0 ... 200 mV IN28 ≈ 0 ... 300 mV IN29 ≈ 0 ... 500 mV IN66 ≈ 0 ... 1,000 mV IN29 ≈ 0 ... 1.0 V IN50 ≈ 0 ... 1.5 V IN30 ≈ 0 ... 2.0 V IN52 ≈ 0 ... 3.0 V IN05 ≈ 0 ... 5 V IN03 ≈ 0 ... 10 V IN67 ≈ 0 ... 15 V IN32 ≈ 0 ... 20 V IN39 ≈ 0 ... 30 V IN68 ≈ 0 ... 50 V IN69 ≈ 0 ... 100 V IN06 ≈ 1 ... 5 V IN04 ≈ 2 ... 10 V	IN70 ≈ 0 ... 1.0 mA IN71 ≈ 0 ... 1.5 mA IN72 ≈ 0 ... 2.0 mA IN73 ≈ 0 ... 3.0 mA IN36 ≈ 0 ... 5 mA IN37 ≈ 0 ... 10 mA IN74 ≈ 0 ... 15 mA IN16 ≈ 0 ... 300 mV IN17 ≈ -500 ... +500 mV IN78 ≈ -1,000 ... +1,000 mV IN18 ≈ -1.0 ... +1.0 V IN63 ≈ -1.5 ... +1.5 V IN19 ≈ -2.0 ... +2.0 V IN65 ≈ -3.0 ... +3.0 V IN21 ≈ -5 ... +5 V IN22 ≈ -10 ... +10 V IN79 ≈ -15 ... +15 V IN23 ≈ -20 ... +20 V IN80 ≈ -30 ... +30 V IN81 ≈ -50 ... +50 V IN82 ≈ -100 ... +100 V IN91 ≈ 1 ... 5 mA IN92 ≈ 2 ... 10 mA IN02 ≈ 4 ... 20 mA	OUT19 ≈ 0 ... 2.5 V OUT05 ≈ 0 ... 5 V OUT03 ≈ 0 ... 10 V OUT20 ≈ -2.5 ... +2.5 V OUT13 ≈ -5 ... +5 V OUT14 ≈ -10 ... +10 V OUT24 ≈ 0.5 ... +2.5 V OUT06 ≈ 1 ... 5 V OUT04 ≈ 2 ... 10 V OUT27 ≈ 2.5 ... 0 V OUT11 ≈ 5 ... 0 V OUT09 ≈ 10 ... 0 V	OUT15 ≈ 0 ... 5 mA OUT16 ≈ 0 ... 10 mA OUT01 ≈ 0 ... 20 mA OUT21 ≈ -5 ... +5 mA OUT22 ≈ -10 ... +10 mA OUT23 ≈ -20 ... +20 mA OUT25 ≈ 1 ... 5 mA OUT26 ≈ 2 ... 10 mA OUT02 ≈ 4 ... 20 mA OUT28 ≈ 5 ... 0 mA OUT29 ≈ 10 ... 0 mA OUT07 ≈ 20 ... 0 mA
2811572 ≈ MACX MCR-UI-UI-SP			30 ≈ 30 Hz 10K ≈ 10 kHz	NONE ≈ Without FCC YES ≈ With FCC (a fee is charged) YESPLUS ≈ FCC with 5 measuring points (a fee is charged)

Application example: Level measurement and active analog input card

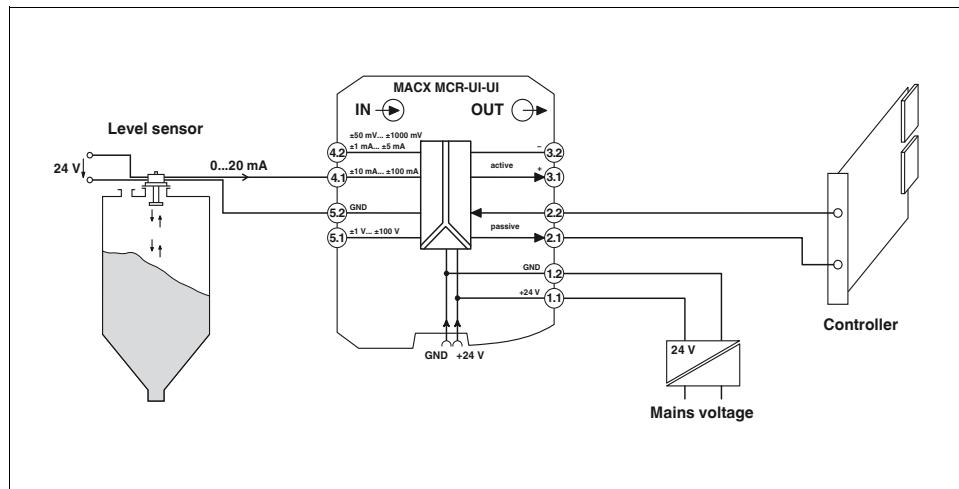



Application example: Shunt measurement and inline terminal with passive analog input channels within an inline station

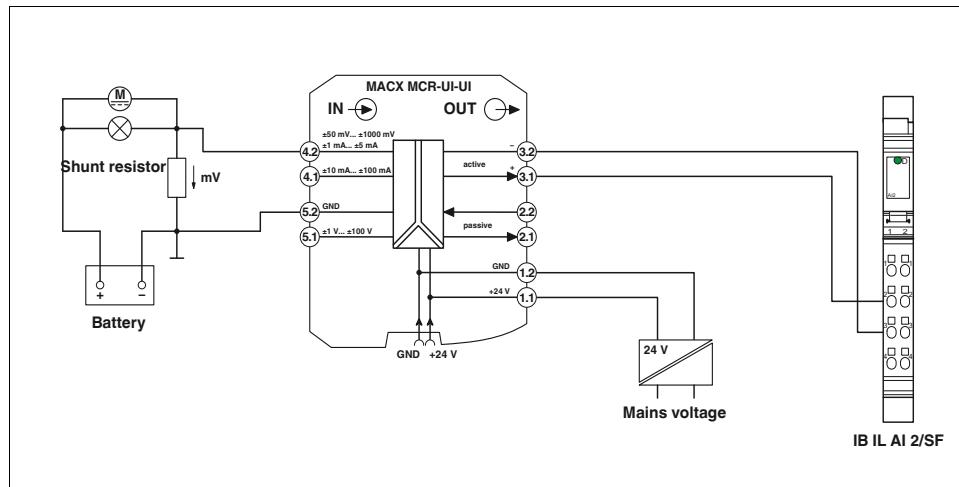

(Information on automation solutions from Phoenix Contact is to be found in Catalog 6 and at phoenixcontact.net/products)

MACX Analog – Signal conditioners with functional safety

Analog IN/Analog OUT 3-way signal conditioners

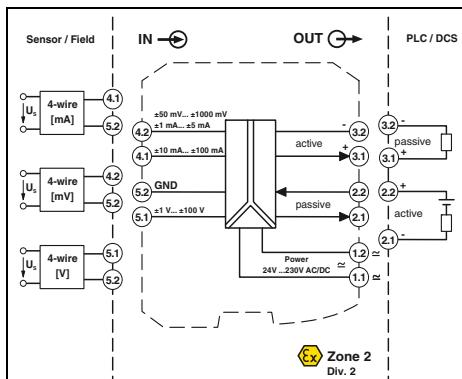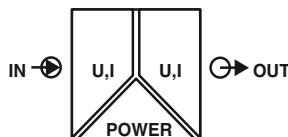

Ex n

SIL
IEC 61508



3-way signal conditioner, configurable, over 1600 signal combinations

DNV GL Functional Safety

Ex: Ex II 3 G Ex nA IIC T4 Gc

Housing width 12.5 mm

Technical data

- Analog signal conditioners for isolating, filtering, amplifying, and converting standard analog signals
- Configurable input and output signals, including bipolar current and voltage signals
- 3-way electrical isolation
- Over 1600 signal conversions can be set via DIP switches on the front
- Output active or passive
- Plug-in screw or Push-in connection technology
- Wide-range power supply of 19.2 to 253 V AC/DC
- Status indicator for supply voltage
- Up to SIL 2 in accordance with IEC 61508
- Installation in zone 2 permitted

Notes:

To order a product with an order configuration, enter the required configuration by referring to the adjacent order key.


Input data	U input 0 ... 10 V, please indicate if different setting when ordering 0 ... 1 mA, configurable via DIP switches	I input $\pm 100 \text{ mA}$ Approx. 10 Ω ($\pm 1 \text{ V DC} \dots \pm 100 \text{ V DC}$)
Maximum input signal Input resistance	$\pm 100 \text{ V}$ Approx. 1 M Ω ($\pm 1 \text{ V DC} \dots \pm 100 \text{ V DC}$)	$\pm 10 \text{ mA}$ Approx. 10 Ω ($\pm 10 \text{ mA DC} \dots \pm 100 \text{ mA DC}$)
Output data	U output 0 ... 10 V, configurable via DIP switches 0 ... 20 mA, configurable via DIP switches	I output 35 mA $\leq 600 \text{ }\Omega$ (20 mA; active) passive: $\leq (\text{UB}-2 \text{ V}) / I_{\text{outmax}}$
Maximum output signal Load R _B	15 V $\geq 1 \text{ k}\Omega$ (10 V)	
General data	24 V ... 230 V AC/DC (-20%/+10%, 50/60 Hz) <0.8 W (at 24 V DC / 20 mA) <0.9 W (at 230 V AC / 20 mA) $\leq 0.1\%$ (compared to the final value) 0.0075%/K $\pm 4\% / \pm 4\%$	
Supply voltage range Power dissipation	$\leq 0.1\%$ (compared to the final value) 0.0075%/K $\pm 4\% / \pm 4\%$	
Maximum transmission error Temperature coefficient ZERO / SPAN adjustment Electrical isolation	2.5 kV (50 Hz, 1 min., test voltage) 300 V _{rms} (rated insulation voltage (overvoltage category II; degree of pollution 2, safe isolation as per EN 61010-1))	
Degree of protection Ambient temperature (operation) Housing material Dimensions W/H/D Screw connection rigid / flexible / AWG Push-in connection rigid / flexible / AWG EMC note	IP20 -20°C ... 70°C PA 6.6-FR 12.5 / 99 / 114.5 mm 0.2 ... 2.5 mm ² / 0.2 ... 2.5 mm ² / 24 - 14 0.2 ... 1.5 mm ² / 0.2 ... 1.5 mm ² / 24 - 16	
Conformance/approvals	CE-compliant Ex II 3 G Ex nA IIC T4 Gc 2	
Conformance ATEX SIL in accordance with IEC 61508		
Ordering data		
Description	Type	Order No. Pcs./Pkt.
3-way signal conditioner, for electrical isolation of analog signals with long-range power supply		
Order configuration	Screw connection	MACX MCR-UI-UI-UP 2811459
Order configuration	Push-in connection	MACX MCR-UI-UI-UP-SP 2811585
Standard configuration	Screw connection	MACX MCR-UI-UI-UP-NC 2811297
Standard configuration	Push-in connection	MACX MCR-UI-UI-UP-SP-NC 2811569

MACX Analog – Signal conditioners with functional safety


Order key for MACX MCR-UI-UI-(SP) (standard configuration entered as an example)

Order No.	Input	Output	Cut-off frequency	Factory calibration certificate (FCC)
2811459	IN03 IN40 $\hat{=}$ 0 ... 50 mV IN24 $\hat{=}$ 0 ... 60 mV IN41 $\hat{=}$ 0 ... 75 mV IN25 $\hat{=}$ 0 ... 100 mV IN43 $\hat{=}$ 0 ... 120 mV IN26 $\hat{=}$ 0 ... 100 mV IN44 $\hat{=}$ 0 ... 150 mV IN28 $\hat{=}$ 0 ... 500 mV IN66 $\hat{=}$ 0 ... 1,000 mV IN29 $\hat{=}$ 0 ... 1.0 V IN50 $\hat{=}$ 0 ... 1.5 V IN30 $\hat{=}$ 0 ... 2.0 V IN52 $\hat{=}$ 0 ... 3.0 V IN05 $\hat{=}$ 0 ... 5 V IN03 $\hat{=}$ 0 ... 10 V IN67 $\hat{=}$ 0 ... 15 V IN32 $\hat{=}$ 0 ... 20 V IN39 $\hat{=}$ 0 ... 30 V IN68 $\hat{=}$ 0 ... 50 V IN69 $\hat{=}$ 0 ... 100 V IN06 $\hat{=}$ 1 ... 5 V IN04 $\hat{=}$ 2 ... 10 V	OUT01 OUT19 $\hat{=}$ 0 ... 2.5 V OUT05 $\hat{=}$ 0 ... 5 V OUT03 $\hat{=}$ 0 ... 10 V OUT20 $\hat{=}$ -2.5 ... +2.5 V OUT13 $\hat{=}$ -5 ... +5 V OUT14 $\hat{=}$ -10 ... +10 V OUT24 $\hat{=}$ 0.5 ... +2.5 V OUT06 $\hat{=}$ 1 ... 5 V OUT04 $\hat{=}$ 2 ... 10 V OUT27 $\hat{=}$ 2.5 ... 0 V OUT11 $\hat{=}$ 5 ... 0 V OUT09 $\hat{=}$ 10 ... 0 V OUT28 $\hat{=}$ 5 ... 0 mA OUT29 $\hat{=}$ 10 ... 0 mA OUT07 $\hat{=}$ 20 ... 0 mA	10K 30 $\hat{=}$ 30 Hz 10K $\hat{=}$ 10 kHz	NONE NONE $\hat{=}$ Without FCC YES $\hat{=}$ With FCC (a fee is charged) YESPLUS $\hat{=}$ FCC with 5 measuring points (a fee is charged)
2811459 $\hat{=}$ MACX MCR-UI-UI-UP	IN53 $\hat{=}$ -50 ... +50 mV IN13 $\hat{=}$ -60 ... +60 mV IN54 $\hat{=}$ -75 ... +75 mV IN14 $\hat{=}$ -100 ... +100 mV IN56 $\hat{=}$ -120 ... +120 mV IN70 $\hat{=}$ 0 ... 1.0 mA IN71 $\hat{=}$ 0 ... 1.5 mA IN72 $\hat{=}$ 0 ... 2.0 mA IN73 $\hat{=}$ 0 ... 3.0 mA IN36 $\hat{=}$ 0 ... 5 mA IN37 $\hat{=}$ 0 ... 10 mA IN74 $\hat{=}$ 0 ... 15 mA IN75 $\hat{=}$ 0 ... 30 mA IN76 $\hat{=}$ 0 ... 50 mA IN77 $\hat{=}$ 0 ... 100 mA IN83 $\hat{=}$ -1.0 ... +1.0 mA IN84 $\hat{=}$ -1.5 ... +1.5 mA IN85 $\hat{=}$ -2.0 ... +2.0 mA IN86 $\hat{=}$ -3.0 ... +3.0 mA IN33 $\hat{=}$ -5 ... +5 mA IN34 $\hat{=}$ -10 ... +10 mA IN87 $\hat{=}$ -15 ... +15 mA IN35 $\hat{=}$ -20 ... +20 mA IN88 $\hat{=}$ -30 ... +30 mA IN89 $\hat{=}$ -50 ... +50 mA IN90 $\hat{=}$ -100 ... +100 mA IN91 $\hat{=}$ 1 ... 5 mA IN92 $\hat{=}$ 2 ... 10 mA IN02 $\hat{=}$ 4 ... 20 mA	OUT15 $\hat{=}$ 0 ... 5 mA OUT16 $\hat{=}$ 0 ... 10 mA OUT01 $\hat{=}$ 0 ... 20 mA OUT21 $\hat{=}$ -5 ... +5 mA OUT22 $\hat{=}$ -10 ... +10 mA OUT23 $\hat{=}$ -20 ... +20 mA OUT25 $\hat{=}$ 1 ... 5 mA OUT26 $\hat{=}$ 2 ... 10 mA OUT02 $\hat{=}$ 4 ... 20 mA OUT28 $\hat{=}$ 5 ... 0 mA OUT29 $\hat{=}$ 10 ... 0 mA OUT07 $\hat{=}$ 20 ... 0 mA		
2811585 $\hat{=}$ MACX MCR-UI-UI-UP-SP				

Application example: Level measurement and active analog input card

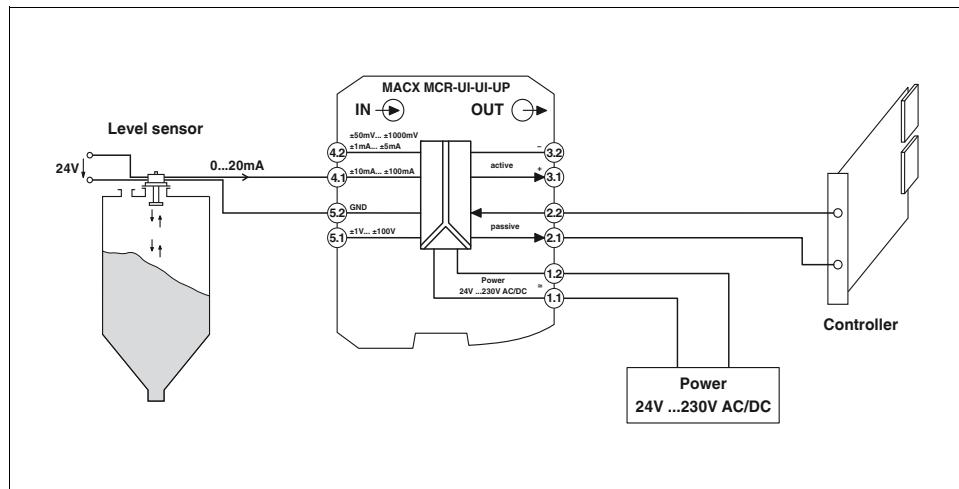



Application example: Shunt measurement and inline terminal with analog input channels within an inline station

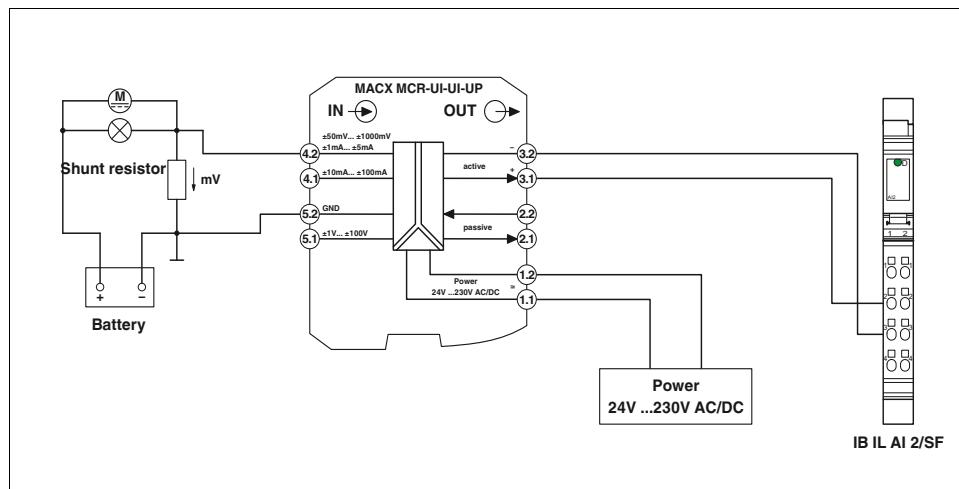

(Information on automation solutions from Phoenix Contact is to be found in Catalog 6 and at phoenixcontact.net/products)

MACX Analog – Signal conditioners with functional safety

Analog IN / Analog OUT repeater power supplies

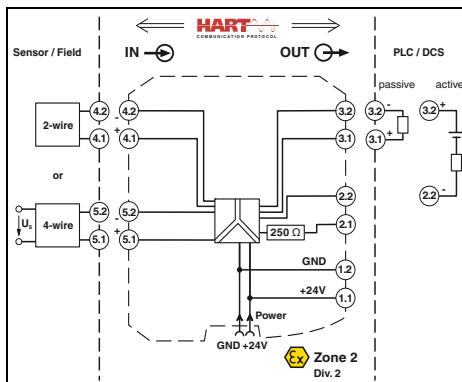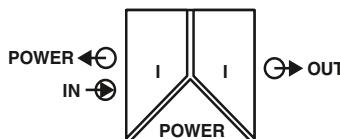

Ex n

SIL
IEC 61508



Repeater power supply
and input signal conditioner

○_{Ex} Functional Safety

Ex: ○_{Ex}

Housing width 12.5 mm

Technical data

Repeater power supply and input signal conditioners for the operation of 2-conductor measuring transducers, 4-conductor measuring transducers, and mA current sources

- 0/4 to 20 mA input (powered or not powered)
- 0/4 to 20 mA output (active or passive)
- Bidirectional transmission of digital HART communication signals
- Plug-in screw or Push-in connection technology, with integrated sockets for HART communicators
- Terminal point with 250 Ω resistor to increase the HART impedance in the case of low-impedance systems
- 3-way electrical isolation
- Power supply via DIN rail connector possible
- Up to SIL 2 in accordance with IEC 61508
- Installation in zone 2 permitted

Notes:

Information about the supply and error evaluation module as well as about the DIN rail connectors and marking material can be found from page 175

Test plugs for test sockets can be found on page 177

Information on "Plug and play" connection using system cabling can be found from page 170

Input data

Input signal
Transmitter supply voltage
Voltage drop
Output data
Output signal

Load

Output ripple

General data

Supply voltage range
Current consumption

Power dissipation

Temperature coefficient
Step response (10-90%)

Transmission error, typical
Maximum transmission error
Under-/overload range
Electrical isolation

Input/output/power supply

Ambient temperature range

Status indication
SMART communication
Signal bandwidth
Protocols supported
Housing material
Dimensions W/H/D
Screw connection rigid / flexible / AWG
Push-in connection rigid / flexible / AWG
Conformance/approvals

Conformance

ATEX

UL, USA/Canada

4 mA ... 20 mA

>21.5 V (20 mA)

<3.5 V (in input signal conditioner operation)

4 mA ... 20 mA (active)

4 mA ... 20 mA (14 ... 26 V ext. source voltage)

<1,000 Ω (20 mA)

<20 mV_{rms}

19.2 V DC ... 30 V DC (24 V DC -20%...+25%)

<76 mA (24 V DC / 20 mA / 1,000 Ω) ;

<55 mA (24 V DC / 20 mA / 250 Ω)

<1.1 W (24 V DC/ 20 mA)

<0.95 W (24 V DC / 20 mA / 250 Ω)

<1.2 W (24 V DC / 20 mA / 0 Ω)

<0.01%K

<200 μs (for jump 4 mA ... 20 mA, load 600 Ω)

<0.05% (of final value)

<0.1% (of final value)

In accordance with NE 43

300 V_{rms} (rated insulation voltage (overvoltage category II); degree of pollution 2, safe isolation as per EN 61010-1))
2.5 kV (50 Hz, 1 min., test voltage)

-20°C ... 60°C (any mounting position)

Green LED (supply voltage)

Yes

as per HART specifications

HART

PA 6.6-FR

12.5 / 112.5 / 114.5 mm

0.2 ... 2.5 mm² / 0.2 ... 2.5 mm² / 24 - 14

0.2 ... 1.5 mm² / 0.2 ... 1.5 mm² / 24 - 16

CE-compliant, additionally EN 61326

○_{Ex} II 3 G Ex nA II T4 Gc X

UL 61010 Listed

UL 508 Listed

Class I, Div. 2, Groups A, B, C, D T4

Class I, Zone 2, Group IIC T4

2

Ordering data

Description

Repeater power supply, HART®-transparent

Screw connection
Push-in connection

MACX MCR-SL-RPSSI-I
MACX MCR-SL-RPSSI-I-SP



2865955

2924207

1

1

Analog IN / Analog OUT repeater power supplies

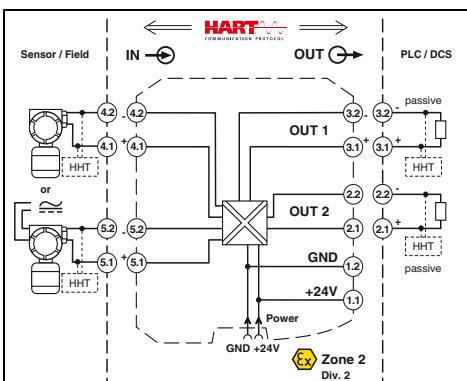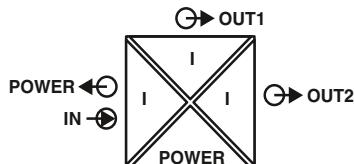

Ex
n

SIL
IEC 61508
PL
EN ISO 13849



Repeater power supply and
input signal conditioner,
with two electrically isolated outputs

Functional Safety

Ex:

Housing width 12.5 mm

Technical data



Input data	4 mA ... 20 mA / 0 mA ... 20 mA
Input signal	>21.5 V (20 mA)
Transmitter supply voltage	<3.9 V (in input signal conditioner operation)
Voltage drop	
Output data	4 mA ... 20 mA (active)
Output signal (per output)	0 mA ... 20 mA
Load	<450 Ω (20 mA)
Output ripple	<20 mV _{rms}
General data	
Supply voltage range	19.2 V DC ... 30 V DC (24 V DC -20%...+25%)
Current consumption	<75 mA (24 V DC / 20 mA)
Power dissipation	<1.45 W (24 V DC / 20 mA)
Temperature coefficient	<0.01%/K
Step response (10-90%)	1.3 ms (for jump 4 mA ... 20 mA, typical)
Transmission error, typical	<0.05% (of final value)
Maximum transmission error	<0.1% (of final value)
Under-/overload range	In accordance with NE 43
Electrical isolation	
Input/output/power supply	300 V _{rms} (rated insulation voltage (overvoltage category II); degree of pollution 2, safe isolation as per EN 61010-1)) 2.5 kV (50 Hz, 1 min., test voltage)
Ambient temperature range	Output 1/output 2 1.5 kV AC (50 Hz, 1 min., test voltage) -20°C ... 60°C (any mounting position) -20°C ... 70°C (any mounting position, module distance > 5 mm, MTBF reduction factor 2.5, not assessed by UL)
Status indication	Green LED (PWR supply voltage)
SMART communication (per output)	Yes
Protocols supported	HART
Housing material	PA 6.6-FR
Dimensions W/H/D	12.5 / 112.5 / 114.5 mm
Screw connection rigid / flexible / AWG	0.2 ... 2.5 mm ² / 0.2 ... 2.5 mm ² / 24 - 14
Push-in connection rigid / flexible / AWG	0.2 ... 1.5 mm ² / 0.2 ... 1.5 mm ² / 24 - 16
Conformance/approvals	CE-compliant, additionally EN 61326-1 Ex II 3 G Ex nA IIC T4 Gc X 2
Conformance	
ATEX	
SIL in accordance with IEC 61508	

Ordering data

Description	Type	Order No.	Pcs./Pkt.
Repeater power supply, HART®-transparent	Screw connection	MACX MCR-SL-RPSSI-2I	2924825
	Push-in connection	MACX MCR-SL-RPSSI-2I-SP	2924838

MACX Analog – Signal conditioners with functional safety

Analog IN / Analog OUT repeater power supplies

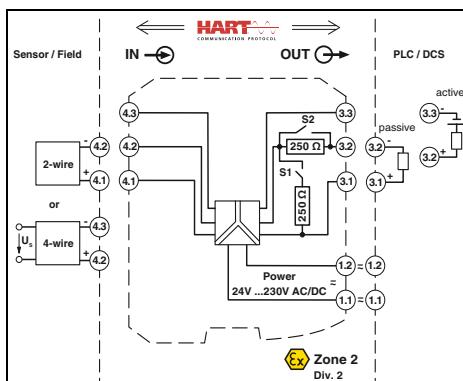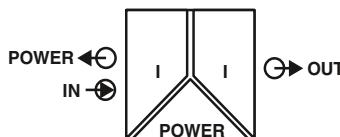

Ex n

SIL
IEC 61508



**Repeater power supply and
input signal conditioner,
wide-range power supply**

Ex n Functional Safety

Ex: Ex n

Housing width 17.5 mm

Technical data

**Repeater power supply and input
signal conditioner for the operation
of 2-conductor measuring transducers,
4-conductor measuring transducers,
and mA current sources**

- 0/4 to 20 mA input (powered or not powered)
- 0/4 to 20 mA output (active or passive), 0/1 to 5 V, can be selected via DIP switch
- Bidirectional transmission of digital HART communication signals
- Plug-in screw or Push-in connection technology, with integrated sockets for HART communicators
- 250 Ω resistor that can be activated via DIP switches to increase the HART impedance in the case of low-impedance systems
- 3-way electrical isolation
- Wide-range power supply of 19.2 to 253 V AC/DC
- Up to SIL 2 in accordance with IEC 61508
- Installation in zone 2 permitted

Notes:

Information about the supply and error evaluation module as well as about the DIN rail connectors and marking material can be found from page 175

Test plugs for test sockets can be found on page 177

Input data

Input signal
Transmitter supply voltage
Voltage drop
Output data

Output signal

Load

Output ripple

General data

Supply voltage range

Current consumption

Power dissipation

Temperature coefficient

Step response (10-90%)

Transmission error, typical

Maximum transmission error

Under-/overload range

Electrical isolation

Input/output/power supply

Ambient temperature range

Status indication

SMART communication

Signal bandwidth

Protocols supported

Housing material

Dimensions W/H/D

Screw connection rigid / flexible / AWG

Push-in connection rigid / flexible / AWG

Conformance/approvals

Conformance

ATEX

UL, USA/Canada

4 mA ... 20 mA

>16 V (20 mA)

<3.5 V (in input signal conditioner operation)

4 mA ... 20 mA (active)

4 mA ... 20 mA (14 ... 26 V ext. source voltage)

1 V ... 5 V (internal resistance, 250 Ω, 0.1%)

Configurable via DIP switches

<600 Ω (20 mA)

<20 mV_{rms}

19.2 V AC/DC ... 253 V AC/DC (24 V AC/DC ... 230 V AC/DC (-20% ... +10%, 50/60 Hz))

<75 mA (24 V DC / 20 mA)

<1.6 W (24 V DC / 20 mA)

<0.01%/^oK

<600 μs (for 4 mA ... 20 mA step)

<0.05% (of final value)

<0.1% (of final value)

In accordance with NE 43

300 V_{me} (rated insulation voltage (overvoltage category II); degree of pollution 2, safe isolation as per EN 61010-1))
2.5 kV (50 Hz, 1 min., test voltage)

-20°C ... 60°C (any mounting position)

Green LED (supply voltage)

Yes

as per HART specifications

HART

PA 6.6-FR

17.5 / 112.5 / 114.5 mm

0.2 ... 2.5 mm² / 0.2 ... 2.5 mm² / 24 - 14

0.2 ... 1.5 mm² / 0.2 ... 1.5 mm² / 24 - 16

CE-compliant, additionally EN 61326-1

Ex II 3 G Ex nA IIC T4 Gc X

UL 508 Listed

UL 61010 Listed

Class I, Div. 2, Groups A, B, C, D T4

Class I, Zone 2, Group IIC T4

2

Ordering data

Description

Repeater power supply, HART®-transparent

Type

Order No.

Pcs./Pkt.



Screw connection
Push-in connection

MACX MCR-SL-RPSSI-I-UP
MACX MCR-SL-RPSSI-I-UP-SP

2865968
2924210

1
1

Analog IN / Analog OUT repeater power supplies

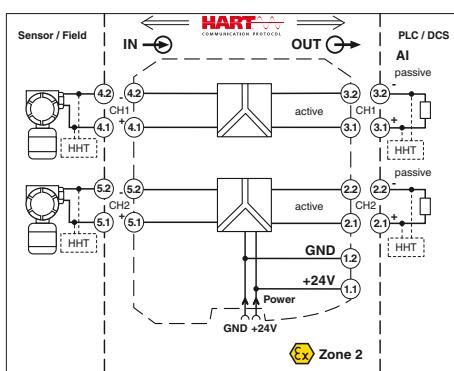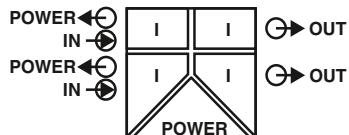

Ex
n

SIL
IEC 61508
PL
EN ISO 13849



2-channel repeater power supply

Functional Safety

Ex

Housing width 12.5 mm

Technical data



Input data	per channel
Input signal	4 mA ... 20 mA
Transmitter supply voltage	>16 V (at 20 mA)
Underload/overload signal range	0 mA ... 24 mA
Output data	per channel
Output signal	4 mA ... 20 mA (active)
Load	$\leq 450 \Omega$ (20 mA)
Underload/overload signal range	0 mA ... 24 mA
General data	
Supply voltage range	19.2 V DC ... 30 V DC (24 V DC -20%...+25%)
Current consumption	<100 mA (24 V / 20 mA)
Power dissipation	<1.4 W (at 24 V DC / 20 mA)
Temperature coefficient	<0.01%/K
Step response (10-90%)	<1.3 ms (for 4 mA ... 20 mA step)
Transmission error, typical	<0.05% (of final value)
Maximum transmission error	<0.1% (of final value)
Electrical isolation	
Input/output, power supply	
Ambient temperature range	300 V _{rms} (rated insulation voltage (overvoltage category II); degree of pollution 2, safe isolation as per EN 61010-1))
Status indication	2.5 kV (50 Hz, 1 min., test voltage)
SMART communication	-20°C ... 60°C (any mounting position)
Signal bandwidth	Green LED (supply voltage)
Protocols supported	Yes
Housing material	as per HART specifications
Dimensions W/H/D	HART
Screw connection rigid / flexible / AWG	PA 6.6-FR
Push-in connection rigid / flexible / AWG	12.5 / 112.5 / 114.5 mm
Conformance/approvals	0.2 ... 2.5 mm ² / 0.2 ... 2.5 mm ² / 24 - 14
Conformance	0.2 ... 1.5 mm ² / 0.2 ... 1.5 mm ² / 24 - 16
ATEX	
UL, USA/Canada	
SIL in accordance with IEC 61508	CE-compliant, additionally EN 61326
Systematic Capability	II 3 G Ex nA IIC T4 Gc X
	UL 61010 Listed
	Class I, Div. 2, Groups A, B, C, D T4
	Class I, Zone 2, Group IIC T4
	2
	3
	SC 3

Ordering data

Description	Type	Order No.	Pcs./Pkt.
Repeater power supply, 2-channel, HART®-transparent			
Screw connection	MACX MCR-SL-RPSS-2I-2I	2904089	1
Push-in connection	MACX MCR-SL-RPSS-2I-2I-SP	2904090	1

MACX Analog – Signal conditioners with functional safety

Analog IN / Analog OUT passive isolators

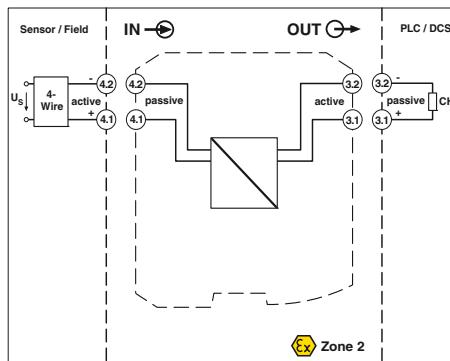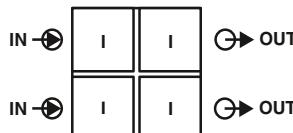

Ex n

SIL
IEC 61508



Passive isolator, one and two channel



Ex: us

Housing width 12.5 mm

Technical data

Input data

Max. voltage input signal

<30.5 V

Input signal

0 mA ... 20 mA / 4 mA ... 20 mA

Input voltage limitation

30.5 V

Voltage dissipation

2.9 V (I = 20 mA)

Response current

Approx. 50 μ A

Output data

Max. voltage output signal

27.5 V

Output signal

0 mA ... 20 mA / 4 mA ... 20 mA

Residual ripple

<10 mV_{rms} (500 Ω load)

Transmission Behavior

1:1 to input signal

Load

\leq 1375 Ω (I = 20 mA)

General data

Supply voltage range

no separate supply voltage necessary

Temperature coefficient

\leq 0.002%/K (of measured value / 100 Ω load)

Maximum transmission error

\leq 0.1% (of final value)

Electrical isolation

Input/output/power supply

300 V_{rms} (rated insulation voltage (overvoltage category II); degree of pollution 2, safe isolation as per EN 61010-1); 2.5 kV (50 Hz, 1 min., test voltage)

Ambient temperature range

-40°C ... 85°C

Humidity

5% ... 95% (non-condensing)

Degree of protection

IP20

Inflammability class in accordance with UL 94

V0

Housing material

PA 6.6-FR

Dimensions W/H/D

12.5 / 99 / 114.5 mm

Screw connection rigid / flexible / AWG

0.2 ... 2.5 mm² / 0.2 ... 2.5 mm² / 24 - 14

Push-in connection rigid / flexible / AWG

0.2 ... 1.5 mm² / 0.2 ... 1.5 mm² / 24 - 16

Conformance/approvals

CE-compliant, additionally EN 61326-1

II 3 G Ex nA IIC T4 Gc X

UL 61010 Listed

Class I, Div. 2, Groups A, B, C, D T4



Class I, Zone 2, Group IIC T4

3

Ordering data

Description	Type	Order No.	Pcs./Pkt.
Passive isolator, one or two channel			
	Screw connection	MACX MCR-SL-I-I-ILP	2905278
	Push-in connection	MACX MCR-SL-I-I-ILP-SP	2905279
	Screw connection	MACX MCR-SL-2I-2I-ILP	2905280
	Push-in connection	MACX MCR-SL-2I-2I-ILP-SP	2905281

Analog IN / Analog OUT passive isolators

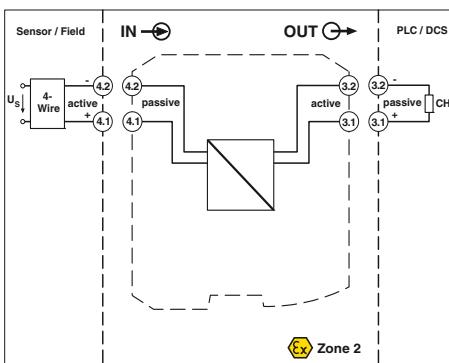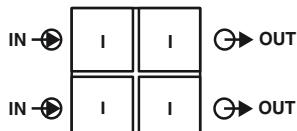

**Passive isolator, one and two channel
5 kV test voltage**



Ex - EAC FS
Ex: eA us Ex

Housing width 12.5 mm

Technical data

Input data			
Max. voltage input signal	<30.5 V		
Input signal	0 mA ... 20 mA / 4 mA ... 20 mA		
Input voltage limitation	30.5 V		
Voltage dissipation	2.9 V (I = 20 mA)		
Response current	Approx. 50 µA		
Output data			
Max. voltage output signal	27.5 V		
Output signal	0 mA ... 20 mA / 4 mA ... 20 mA		
Residual ripple	<10 mV _{rms} (500 Ω load)		
Transmission Behavior	1:1 to input signal		
Load	≤1375 Ω (I = 20 mA)		
General data			
Supply voltage range	no separate supply voltage necessary		
Temperature coefficient	≤0.002%/K (of measured value / 100 Ω load)		
Maximum transmission error	≤0.1% (of final value)		
Electrical isolation	600 V _{rms} (rated insulation voltage (overvoltage category II); degree of pollution 2, safe isolation as per EN 61010-1)) 5 kV (50 Hz, 1 min., test voltage)		
Input/output/power supply			
Ambient temperature range	-40°C ... 85°C		
Humidity	5% ... 95% (non-condensing)		
Degree of protection	IP20		
Inflammability class in accordance with UL 94	V0		
Housing material	PA 6.6/FR		
Dimensions W/H/D	12.5 / 99 / 114.5 mm		
Screw connection rigid / flexible / AWG	0.2 ... 2.5 mm ² / 0.2 ... 2.5 mm ² / 24 - 14		
Push-in connection rigid / flexible / AWG	0.2 ... 1.5 mm ² / 0.2 ... 1.5 mm ² / 24 - 16		
Conformance/approvals			
Conformance	CE-compliant, additionally EN 61326-1		
ATEX	Ex II 3 G Ex nA IIC T4 Gc X		
UL, USA/Canada	UL 61010 Listed Class I, Div. 2, Groups A, B, C, D T4 Class I, Zone 2, Group IIC T4		
SIL in accordance with IEC 61508	3		
Ordering data			
Description	Type	Order No.	Pcs./Pkt.
Passive isolator, one or two channel	Screw connection	MACX MCR-SL-I-I-HV-ILP	1
	Push-in connection	MACX MCR-SL-I-I-HV-ILP-SP	1
	Screw connection	MACX MCR-SL-2I-2I-HV-ILP	1
	Push-in connection	MACX MCR-SL-2I-2I-HV-ILP-SP	1

Temperature, temperature transducers

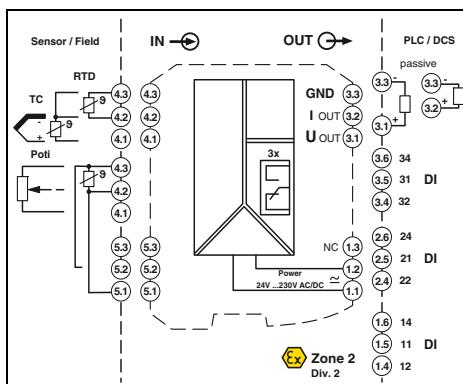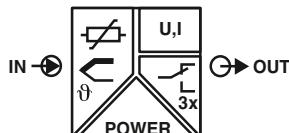

Ex n

SIL
IEC 61508
PL
EN ISO 13849



Temperature transducer, universal,
with three limit value relays,
wide range supply

Functional Safety

Ex: Ex II 3 G Ex nA ic IIC T4 Gc X

Housing width 35 mm

Technical data

Input data

Resistance thermometers
Thermocouple sensors

Resistor

Potentiometer

Voltage

Output data

Output signal

Maximum output signal

Load R_B

Behavior in the event of a sensor error

Switching output

Contact type

Contact material

Max. switching voltage

Maximum switching current

General data

Supply voltage range

Power consumption

Temperature coefficient

Maximum transmission error

Electrical isolation

Input/output/power supply

Ambient temperature range

Humidity

Inflammability class in accordance with UL 94

Housing material

Dimensions W/H/D

Screw connection rigid / flexible / AWG

Push-in connection rigid / flexible / AWG

Conformance/approvals

Conformance

ATEX

IECEx

UL, USA/Canada

SIL in accordance with IEC 61508

Pt, Ni, Cu sensors: 2-, 3-, 4-conductor
B, E, J, K, N, R, S, T, L, U, CA, DA, A1G, A2G, A3G, MG, LG

0 Ω ... 50 kΩ

0 Ω ... 50 kΩ

-1,000 mV ... 1,000 mV

U output

4 mA ... 20 mA (in the case of SIL; further free configuration without SIL)

± 11 V

≥ 10 kΩ

In accordance with NE 43 or freely configurable

Relay output

3 PDTs

AgSnO₂, hard gold-plated

250 V AC (250 V DC)

2 A (250 V AC) / 2 A (28 V DC)

24 V ... 230 V AC/DC (-20%/+10%, 50/60 Hz)

< 2.4 W

0.01% / K

0.1% (e.g. for Pt 100, 300 K span, 4 ... 20 mA)

300 V_{rms} (rated insulation voltage (overvoltage category II); degree of pollution 2, safe isolation as per EN 61010-1))
2.5 kV (50 Hz, 1 min., test voltage)

375 V (peak value in accordance with EN 60079-11)

375 V (peak value in accordance with EN 60079-11)

375 V (peak value in accordance with EN 60079-11)

-20°C ... 65°C

Typically 5% ... 95% (non-condensing)

V0

PA 6.6-FR

35 / 99 / 114.5 mm

0.2 ... 2.5 mm² / 0.2 ... 2.5 mm² / 24 - 14

0.2 ... 1.5 mm² / 0.2 ... 1.5 mm² / 24 - 16

CE-compliant

Ex II 3 G Ex nA ic IIC T4 Gc X

Ex nA ic IIC T4 Gc X

UL 508 Listed

Class I, Div. 2, Groups A, B, C, D T6

Class I, Zone 2, Group IIC T6

2

Ordering data

Description

Type

Order No.

Pcs./Pkt.

Temperature transducer

MACX MCR-T-UIREL-UP

2811378

1

MACX MCR-T-UIREL-UP-SP

2811828

1

MACX MCR-T-UIREL-UP-C

2811514

1

MACX MCR-T-UIREL-UP-SP-C

2811831

1

Accessories

Programming adapter for configuring modules with S-POR

2811271

1

interface

IFS-USB-PROG-ADAPTER

2811271

1

Cold junction compensation connector for thermocouples

2924993

1

MACX Analog – Signal conditioners with functional safety

Order key for MACX MCR-T-UIREL-UP(-SP)-C temperature transducers (standard configuration entered as an example)

Order No.	SIL	Measuring unit	Sensor type	Connection technology	Measuring range: Start	End	Output signal	Switching function 1	Lower switching point 1	Upper switching point 1	Switching function 2	Lower switching point 2	Upper switching point 2	Factory calibration certificate	
2811514	/ ON / C / PT100 / 4 / -50 / 150 / OUT02 / 0 / 99999 / 99999 / 0 / 99999 / 99999 / NONE	ON ≈ Active NONE ≈ Not active ON only with output range = OUT02	Celsius [C] Ω [Ω] Millivolts [V]	See below 2 ≈ 2-conductor 3 ≈ 3-conductor 4 ≈ 4-conductor	See below	See below	0...20 mA [OUT01] 4...20 mA [OUT02] 0...10 V [OUT03] 2...10 V [OUT04] 0...5 V [OUT05] 1...5 V [OUT06] -5...+5 V [OUT13] -10...+10 V [OUT14] 0...5 mA [OUT15] 0...10 mA [OUT16] 1...5 mA [OUT25] 2...10 mA [OUT26]	L [0] H [1]	L → SPH → H [2] H → SPH → L [3] L → SPH → H → SPL → L [4] H → SPH → L → SPL → H [5] L → SPL → H → SPH → L [6] H → SPL → L → SPH → H [7]	Free input, see web site for more	Free input, see web site for more		Free input, see web site for more	Free input, see web site for more	NONE ≈ Without FCC YES ≈ With FCC (a fee is charged) YESPLUS ≈ FCC with 5 measuring points (a fee is charged)

Resistance temperature detector (RTD)

°C	PT50 ≈ Pt 50 IEC60751	-200	850	Smallest measuring range span
°C	PT100 ≈ Pt 100 IEC60751	-200	850	20k
°C	PT200 ≈ Pt 200 IEC60751	-200	850	20k
°C	PT500 ≈ Pt 500 IEC60751	-200	850	20k
°C	PT1000 ≈ Pt 1000 IEC60751	-200	850	20k
°C	PT2000 ≈ Pt 2000 IEC60751	-200	850	20k
°C	PT5000 ≈ Pt 5000 IEC60751	-200	850	20k
°C	PT50S ≈ PT50 SAMA RC21-4-1966	-200	850	20k
°C	PT100S ≈ PT100 SAMA RC21-4-1966	-200	850	20k
°C	PT200S ≈ PT200 SAMA RC21-4-1966	-200	850	20k
°C	PT500S ≈ PT500 SAMA RC21-4-1966	-200	850	20k
°C	PT1000S ≈ PT1000 SAMA RC21-4-1966	-200	850	20k
°C	PT2000S ≈ PT2000 SAMA RC21-4-1966	-200	850	20k
°C	PT5000S ≈ PT5000 SAMA RC21-4-1966	-200	850	20k
°C	PT100G ≈ Pt100 G GOST 6651-2009 (α=0.00391)	-200	850	20k
°C	PT200G ≈ Pt200 G GOST 6651-2009 (α=0.00391)	-200	850	20k
°C	PT500G ≈ Pt500 G GOST 6651-2009 (α=0.00391)	-200	850	20k
°C	PT1000G ≈ Pt1000 G GOST 6651-2009 (α=0.00391)	-200	850	20k
°C	PT100J ≈ Pt 100 JIS C1604/1997	-200	850	20k
°C	PT200J ≈ Pt 200 JIS C1604/1997	-200	850	20k
°C	PT500J ≈ Pt 500 JIS C1604/1997	-200	850	20k
°C	PT1000J ≈ Pt 1000 JIS C1604/1997	-200	850	20k
°C	NI100 ≈ NI100 DIN 43760	-60	250	20k
°C	NI200 ≈ NI200 DIN 43760	-60	250	20k
°C	NI500 ≈ NI500 DIN 43760	-60	250	20k
°C	NI1000 ≈ NI1000 DIN 43760	-60	250	20k
°C	NI100S ≈ NI100 SAMA RC21-4-1966	-60	180	20k
°C	NI200S ≈ NI200 SAMA RC21-4-1966	-60	180	20k
°C	NI500S ≈ NI500 SAMA RC21-4-1966	-60	180	20k
°C	NI1000S ≈ NI1000 SAMA RC21-4-1966	-60	180	20k
°C	NI1000L ≈ NI1000 Landis&Gyr	-50	160	20k
°C	CU10 ≈ CU10 SAMA RC21-4-1966	-70	500	20k
°C	CU50 ≈ CU 50 GOST 6651-2009 (α=0.00428)	-50	200	20k
°C	CU100 ≈ CU 100 GOST 6651-2009 (α=0.00428)	-50	200	20k
°C	CU53 ≈ CU 53 GOST 6651-2009 (α=0.00426)	-50	180	20k
°C	KTY81 ≈ KTY81 KTY81-110 (Philips)	-55	150	20k
°C	KTY84 ≈ KTY81 KTY84-130 (Philips)	-40	300	20k

Other setting options can be configured with the IFS-CONF software:

- Freely configurable user characteristic curve with 30 support points
- Output behavior in the event of a short circuit, sensor break or overrange/underrange can be freely configured or set in accordance with NE43 (standard configuration: NE43 upscale)
- Filter setting (standard configuration: 1)
- Restart after failsafe (standard configuration: ON)
- Switching behavior: switching output (limit values, times, etc.) (standard configuration: OFF)

Thermocouples (TC)

°C	A1G ≈ A-1 GOST 8.585-2001	0	2,500	50k
°C	A2G ≈ A-2 GOST 8.585-2001	0	1,800	50k
°C	A3G ≈ A-3 GOST 8.585-2001	0	1,800	50k
°C	B ≈ B IEC584-1 (Pt100Rh-Pt6Rh)	500	1,820	50k
°C	C ≈ C ASTM E988	0	2,315	50k
°C	D ≈ DA ASTM E988(2002)	0	2,315	50k
°C	E ≈ E IEC584-1 (NiCr-CuNi)	-230	1,000	50k
°C	J ≈ J IEC584-1(Fe-CuNi)	-210	1,200	50k
°C	K ≈ K IEC584-1(NiCr-Ni)	-250	1372	50k
°C	MG ≈ MG GOST 8.585-2001	-200	100	50k
°C	N ≈ N IEC 584-1 (NiCrSi-NiSi)	-200	1,300	50k
°C	R ≈ R IEC 584-1 (Pt13Rh-Pt)	-50	1,768	50k
°C	S ≈ S IEC 584-1 (Pt10Rh-Pt)	-50	1,768	50k
°C	T ≈ T IEC 584-1 (Cu-CuNi)	-200	400	50k
°C	L ≈ L DIN 43760 (Fe-CuNi)	-200	900	50k
°C	LG ≈ LG GOST 8.585-2001	-200	800	50k
°C	U ≈ U DIN 43760 (Cu-CuNi)	-200	600	50k

Remote resistance-type sensors (R) (2-, 3-, 4-conductor)

Ω	RES12 ≈ Resistance 0...50,000 Ω For more values, visit www.phoenixcontact.com	0	50,000	10% of the selected measuring range
---	--	---	--------	-------------------------------------

Potentiometers (3-conductor)

Ω	POT12 ≈ Potentiometer 0...50,000 Ω For more values, visit www.phoenixcontact.com	0	50,000	10% of the selected measuring range
---	---	---	--------	-------------------------------------

Voltage signals (mV)



mV	V04 ≈ Voltage -1,000 mV...+1,000 mV For more values, visit www.phoenixcontact.com	-1,000	1,000	10% of nominal span
----	--	--------	-------	---------------------

Temperature conversion guide for °C to °F:

$$T [^{\circ}\text{F}] = \frac{9}{5} T [^{\circ}\text{C}] + 32$$

MACX Analog – Signal conditioners with functional safety

Temperature, temperature transducers

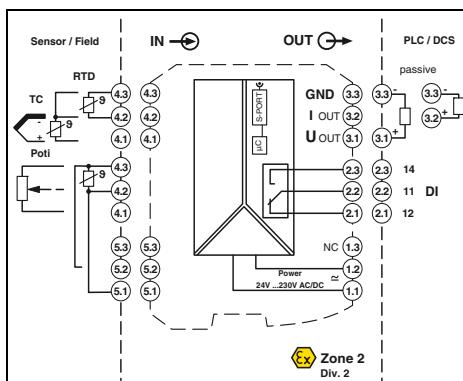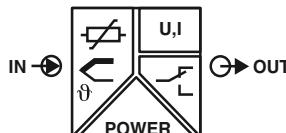

Ex n

SIL
IEC 61508



Temperature transducer, universal,
with switching output, wide range supply

Functional Safety

Ex: Ex II 3 G Ex nA nC IIC T4 Gc X

Housing width 17.5 mm

Technical data

Input data

Resistance thermometers
Thermocouple sensors

Resistor

Potentiometer

Voltage

Output data

Output signal

Maximum output signal

Load R_B

Behavior in the event of a sensor error

Switching output

Contact type

Contact material

Max. switching voltage

Maximum switching current

General data

Supply voltage range

Power consumption

Temperature coefficient

Transmission error, total

Electrical isolation

Input/output/power supply

Ambient temperature range

Humidity

Inflammability class in accordance with UL 94

Housing material

Dimensions W/H/D

Screw connection rigid / flexible / AWG

Push-in connection rigid / flexible / AWG

Conformance/approvals

Conformance

ATEX

IECEx

SIL in accordance with IEC 61508

Input/output/power supply

Input/power supply

Input/switching output

Pt, Ni, Cu sensors: 2-, 3-, 4-conductor
B, E, J, K, N, R, S, T, L, U, CA, DA, A1G, A2G, A3G, MG, LG

0 Ω ... 50 kΩ

0 Ω ... 50 kΩ

-1,000 mV ... 1,000 mV

± 11 V

≥ 10 kΩ

In accordance with NE 43 or freely configurable

Relay output

1 PDT

AgSnO₂, hard gold-plated

30 V AC (30 V DC)

0.5 A (30 V AC) / 1 A (30 V DC)

24 V ... 230 V AC/DC (-20%/+10%, 50/60 Hz)
<1.5 W

0.01%/K

<0.1% (e.g., for Pt 100, 300 K span, 4 ... 20 mA)

240 V_{rms} (rated insulation voltage (overvoltage category II);
degree of pollution 2, safe isolation as per EN 61010-1))
2.5 kV (50 Hz, 1 min., test voltage)

375 V (peak value in accordance with EN 60079-11)

375 V (peak value in accordance with EN 60079-11)

375 V (peak value in accordance with EN 60079-11)

-20°C ... 65°C

Typically 5% ... 95% (non-condensing)

V0

PA 6.6-FR

17.5 / 99 / 114.5 mm

0.2 ... 2.5 mm² / 0.2 ... 2.5 mm² / 24 - 14

0.2 ... 1.5 mm² / 0.2 ... 1.5 mm² / 24 - 16

CE-compliant

Ex II 3 G Ex nA nC IIC T4 Gc X

Ex nA nC ic IIC T4 Gc X

2

Ordering data

Description

Type

Order No.

Pcs./Pkt.

Temperature transducer

Screw connection

Push-in connection

Screw connection

Push-in connection

MACX MCR-T-UI-UP 2811394 1
MACX MCR-T-UI-UP-SP 2811860 1
MACX MCR-T-UI-UP-C 2811873 1
MACX MCR-T-UI-UP-SP-C 2811970 1

Accessories

Programming adapter for configuring modules with S-PORT interface

IFS-USB-PROG-ADAPTER 2811271 1

Cold junction compensation connector for thermocouples

MACX MCR-CJC 2924993 1

MACX Analog – Signal conditioners with functional safety



Order key for MACX MCR-T-UI-UP(-SP)-C temperature transducers (standard configuration entered as an example)

Order No.	Safety Integrity Level (SIL)	Sensor type	Connection technology	Cold junction compensation	Measuring range: Start	Measuring range: End	Measuring unit	Output range	Factory calibration certificate = FCC
2811873	ON	PT100	4	0 ≈ Off, e.g., with RTD, R, potentiometer, mV	-50	150	C ≈ °C F ≈ °F O ≈ Ω P ≈ % V ≈ mV	OUT02	NONE
2811873 ≈ MACX MCR-T-UI-UP-C	ON ≈ Active NONE ≈ Not active ON only with output range = OUT02	See below	2 ≈ 2-conductor 3 ≈ 3-conductor 4 ≈ 4-conductor	See below	See below			OUT15 ≈ 0 ... 5 mA OUT16 ≈ 0 ... 10 mA OUT01 ≈ 0 ... 20 mA OUT15 ≈ 0 ... 5 mA OUT25 ≈ 1 ... 5 mA OUT26 ≈ 2 ... 10 mA OUT02 ≈ 4 ... 20 mA OUT05 ≈ 0 ... 5 V OUT03 ≈ 0 ... 10 V OUT06 ≈ 1 ... 5 V OUT04 ≈ 2 ... 10 V OUT13 ≈ -5 ... +5 V OUT14 ≈ -10 ... +10 V Others can be freely configured in the software	NONE ≈ Without FCC YES ≈ With FCC (a fee is charged) YESPLUS ≈ FCC with 5 measuring points (a fee is charged)
2811970 ≈ MACX MCR-T-UI-UP-SP-C									
Resistance temperature detector (RTD)	PT50	≈ Pt 50 IEC60751		-200	850	°C	20k	Smallest measuring range span	
	PT100	≈ Pt 100 IEC60751		-200	850	°C	20k	Other setting options can be configured with the IFS-CONF software:	
	PT200	≈ Pt 200 IEC60751		-200	850	°C	20k	- Freely configurable user characteristic curve with 30 support points	
	PT500	≈ Pt 500 IEC60751		-200	850	°C	20k	- Output behavior in the event of a short circuit, sensor break or overrange/underrange can be freely configured or set in accordance with NE43 (standard configuration: NE43 upscale)	
	PT1000	≈ Pt 1000 IEC60751		-200	850	°C	20k	- Filter setting (standard configuration: 1)	
	PT2000	≈ Pt 2000 IEC60751		-200	850	°C	20k	- Restart after failsafe (standard configuration: ON)	
	PT5000	≈ Pt 5000 IEC60751		-200	850	°C	20k	- Switching behavior: switching output (limit values, times, etc.) (standard configuration: OFF)	
	PT50S	≈ PT50 SAMA RC21-4-1966		-200	850	°C	20k		
	PT100S	≈ PT100 SAMA RC21-4-1966		-200	850	°C	20k		
	PT200S	≈ PT200 SAMA RC21-4-1966		-200	850	°C	20k		
	PT500S	≈ PT500 SAMA RC21-4-1966		-200	850	°C	20k		
	PT1000S	≈ PT1000 SAMA RC21-4-1966		-200	850	°C	20k		
	PT2000S	≈ PT2000 SAMA RC21-4-1966		-200	850	°C	20k		
	PT5000S	≈ PT5000 SAMA RC21-4-1966		-200	850	°C	20k		
	PT100G	≈ PT100 G GOST 6651-2009 (α=0.00391)		-200	850	°C	20k		
	PT200G	≈ PT200 G GOST 6651-2009 (α=0.00391)		-200	850	°C	20k		
	PT500G	≈ PT500 G GOST 6651-2009 (α=0.00391)		-200	850	°C	20k		
	PT1000G	≈ PT1000 G GOST 6651-2009 (α=0.00391)		-200	850	°C	20k		
	PT100J	≈ Pt 100 JIS C1604/1997		-200	850	°C	20k		
	PT200J	≈ Pt 200 JIS C1604/1997		-200	850	°C	20k		
	PT500J	≈ Pt 500 JIS C1604/1997		-200	850	°C	20k		
	PT1000J	≈ Pt 1000 JIS C1604/1997		-200	850	°C	20k		
	NI100	≈ NI100 DIN 43760		-60	250	°C	20k		
	NI200	≈ NI200 DIN 43760		-60	250	°C	20k		
	NI500	≈ NI500 DIN 43760		-60	250	°C	20k		
	NI1000	≈ NI1000 DIN 43760		-60	250	°C	20k		
	NI100S	≈ NI100 SAMA RC21-4-1966		-60	180	°C	20k		
	NI200S	≈ NI200 SAMA RC21-4-1966		-60	180	°C	20k		
	NI500S	≈ NI500 SAMA RC21-4-1966		-60	180	°C	20k		
	NI1000S	≈ NI1000 SAMA RC21-4-1966		-60	180	°C	20k		
	NI1000L	≈ NI1000 Landis&Gyr		-50	160	°C	20k		
	CU10	≈ CU10 SAMA RC21-4-1966		-70	500	°C	20k		
	CU50	≈ CU50 GOST 6651-2009 (α=0.00428)		-50	200	°C	20k		
	CU100	≈ CU100 GOST 6651-2009 (α=0.00428)		-50	200	°C	20k		
	CU53	≈ CU53 GOST 6651-2009 (α=0.00426)		-50	180	°C	20k		
	KTY81	≈ KTY81 KTY81-110 (Philips)		-55	150	°C	20k		
	KTY84	≈ KTY81 KTY84-130 (Philips)		-40	300	°C	20k		
Thermocouples (TC)	A1G	≈ A-1 GOST 8.585-2001		0	2,500	°C	50k		
	A2G	≈ A-2 GOST 8.585-2001		0	1,800	°C	50k		
	A3G	≈ A-3 GOST 8.585-2001		0	1,800	°C	50k		
	B	≈ B IEC584-1 (Pt30Rh-Pt6Rh)		500	1,820	°C	50k		
	C	≈ C ASTM E988		0	2,315	°C	50k		
	D	≈ DA ASTM E988(2002)		0	2,315	°C	50k		
	E	≈ E IEC584-1 (NiCr-CuNi)		-230	1,000	°C	50k		
	J	≈ J IEC584-1 (Fe-CuNi)		-210	1,200	°C	50k		
	K	≈ K IEC584-1(NiCr-Ni)		-250	1,372	°C	50k		
	MG	≈ MG GOST 8.585-2001		-200	100	°C	50k		
	N	≈ N IEC 584-1 (NiCrSi-NiSi)		-200	1,300	°C	50k		
	R	≈ R IEC 584-1 (Pt13Rh-Pt)		-50	1,768	°C	50k		
	S	≈ S IEC 584-1 (Pt10Rh-Pt)		-50	1,768	°C	50k		
	T	≈ T IEC 584-1 (Cu-CuNi)		-200	400	°C	50k		
	L	≈ L DIN 43760 (Fe-CuNi)		-200	900	°C	50k		
	LG	≈ LG GOST 8.585-2001		-200	800	°C	50k		
	U	≈ U DIN 43760 (Cu-CuNi)		-200	600	°C	50k		
Remote resistance-type sensors (R) (2-, 3-, 4-conductor)	RES12	≈ Resistance 0...50,000 Ω For more values, visit www.phoenixcontact.com		0	50,000	Ω	10% of the selected measuring range		
Potentiometers (3-conductor)	POT12	≈ Potentiometer 0...50,000 Ω For more values, visit www.phoenixcontact.com		0	50,000	Ω	10% of the selected measuring range		
Voltage signals (mV)	V04	≈ Voltage -1,000 mV...+1,000 mV For more values, visit www.phoenixcontact.com		-1,000	1,000	mV	10% of nominal span		

$$\text{Temperature conversion guide for } ^\circ\text{C to } ^\circ\text{F: } T [^\circ\text{F}] = \frac{9}{5} T [^\circ\text{C}] + 32$$

Temperature,
temperature transducers

new

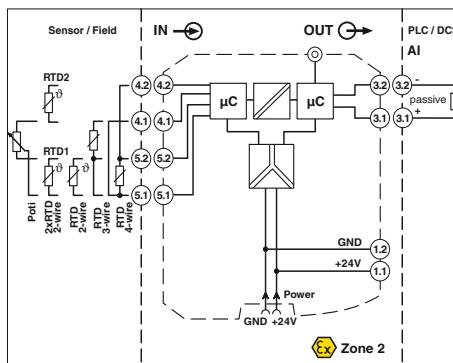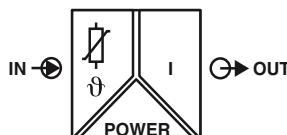

Temperature transducer for resistance thermometers and resistance-type sensors

Programmable temperature transducers for operating resistance thermometers and resistance-type sensors. The measured values are converted into a linear 0 to 20 mA or 4 to 20 mA signal.

- Input for resistance thermometers, potentiometers, and resistance-type sensors
- 0 to 20 mA or 4 to 20 mA output
- Configuration via software (FDT/DTM): Sensor type, connection method, measuring range, measuring unit, filter, alarm signal, and output range
- Programming during operation and also voltage-free using IFS-USB-PROG-ADAPTER programming adapter
- Status indicator for supply voltage, cable, sensor, and module errors
- 3-way electrical isolation
- Power supply via DIN rail connector possible
- Installation in zone 2 permitted
- Up to SIL 2 in accordance with IEC 61508

Input data

Resistance thermometers
Resistor
Potentiometer
Cable resistance
Sensor input current

Pt, Ni, Cu sensors: 2-, 3-, 4-conductor
0 Ω ... 50 kΩ
0 Ω ... 50 kΩ
≤50 Ω per cable
10 µA ... 210 µA (up to 2 x 210 µA for 3-conductor)

Measuring range span

Output data

Output signal

Load

Behavior in the event of a sensor error

Output ripple

General data

Supply voltage range

Current draw

Power dissipation

Temperature coefficient

Step response (0 - 99%)

Transmission error, total

ZERO / SPAN adjustment

Electrical isolation

Input/output/power supply

300 V_{rms} (rated insulation voltage (overvoltage category II); degree of pollution 2, safe isolation as per EN 61010-1))
2.5 kV (50 Hz, 1 min., test voltage)

Ambient temperature range

Humidity

Status indication

Input/output
Input/power supply

375 V (peak value in accordance with EN 60079-11)
375 V (peak value in accordance with EN 60079-11)
-40°C ... 70°C (any mounting position)
5% ... 95% (non-condensing)
Green LED (supply voltage, PWR)
Red LED, flashing 2.4 Hz (cable error, sensor error on input or output, ERR)
Red LED, flashing 1.2 Hz (service operation, ERR)
Red LED, permanently on (module error, ERR)

Inflammability class in accordance with UL 94

Housing material

Dimensions W/H/D

Screw connection rigid / flexible / AWG

Push-in connection rigid / flexible / AWG

Conformance/approvals

Conformance

ATEX

IECEx

SIL in accordance with IEC 61508

V0
PA 6.6-FR
12.5 / 112.5 / 114.5 mm

0.2 ... 2.5 mm² / 0.2 ... 2.5 mm² / 24 - 14
0.2 ... 1.5 mm² / 0.2 ... 1.5 mm² / 24 - 16

CE-compliant, additionally EN 61326
Ex II 3(1) G Ex ec ic [ia Ga] IIC T4 Gc X
Ex ec ic [ia Ga] IIC T4 Gc
2

Ordering data

Description	Type	Order No.	Pcs./Pkt.
MACX MCR-RTD-I		1050192	1
MACX MCR-RTD-I-SP		1050201	1
MACX MCR-RTD-I-C		1052472	1
MACX MCR-RTD-I-SP-C		1052464	1

Accessories

Programming adapter for configuring modules with S-PORT interface	IFS-USB-PROG-ADAPTER	2811271	1
---	----------------------	---------	---

MACX Analog – Signal conditioners with functional safety

Order key for MACX MCR-RTD-I-(SP)-C temperature transducers (standard configuration entered as an example)

Order No.	SIL ON/OFF	Sensor type	Measuring unit	Connection technology	Measuring range: Start	End	Output signal	Sliding mean value	Alarm signal, short circuit	Alarm signal, sensor break	Factory calibration certificate
1052472	ON	PT100	C	4	-50	150	OUT02	1	I000	I000	NONE
1052472 ≈ MACX MCR-RTD-I-C	ON ≈ Active	See below	Celsius [C]	2 ≈ 2-conductor Ω [Ω]	See below	See below	0...20 mA [OUT01] 4...20 mA [OUT02] 0...5 mA [OUT15] 0...10 mA [OUT16] 1...5 mA [OUT25] 2...10 mA [OUT26]	1 - 10	0 mA [I000] 3.5 mA [I035] 21.5 mA [I215]	0 mA [I000] 3.5 mA [I035] 21.5 mA [I215]	NONE ≈ Without FCC
1052464 ≈ MACX MCR-RTD-I-SP-C	NONE ≈ Not active ON only with output range = OUT02		Millivolts [V]	3 ≈ 3-conductor 4 ≈ 4-conductor						YES ≈ With FCC (a fee is charged)	
Resistance temperature detector (RTD)											YESPLUS ≈ FCC with 5 measuring points (a fee is charged)
	PT50	≈ Pt 50 IEC60751					°C	-200	850	20k	Smallest measuring range span
PT100	≈ Pt 100 IEC60751						°C	-200	850	20k	Other setting options can be configured with the IFS-CONF software:
PT200	≈ Pt 200 IEC60751						°C	-200	850	20k	- Freely configurable user characteristic curve with 30 support points
PT500	≈ Pt 500 IEC60751						°C	-200	850	20k	- Output behavior in the event of a short circuit, sensor break or over-range/under-range can be freely configured or set in accordance with NE43 (standard configuration: NE43 upscale)
PT1000	≈ Pt 1000 IEC60751						°C	-200	850	20k	- Filter setting (standard configuration: 1)
PT2000	≈ Pt 2000 IEC60751						°C	-200	850	20k	- Restart after failsafe (standard configuration: ON)
PT5000	≈ Pt 5000 IEC60751						°C	-200	850	20k	- Switching behavior: switching output (limit values, times, etc.) (standard configuration: OFF)
PT50S	≈ PT50 SAMA RC21-4-1966						°C	-200	850	20k	
PT100S	≈ PT100 SAMA RC21-4-1966						°C	-200	850	20k	
PT200S	≈ PT200 SAMA RC21-4-1966						°C	-200	850	20k	
PT500S	≈ PT500 SAMA RC21-4-1966						°C	-200	850	20k	
PT1000S	≈ PT1000 SAMA RC21-4-1966						°C	-200	850	20k	
PT2000S	≈ PT2000 SAMA RC21-4-1966						°C	-200	850	20k	
PT5000S	≈ PT5000 SAMA RC21-4-1966						°C	-200	850	20k	
PT100G	≈ PT100 G GOST 6651-2009 ($\alpha=0.00391$)						°C	-200	850	20k	
PT200G	≈ PT200 G GOST 6651-2009 ($\alpha=0.00391$)						°C	-200	850	20k	
PT500G	≈ PT500 G GOST 6651-2009 ($\alpha=0.00391$)						°C	-200	850	20k	
PT1000G	≈ PT1000 G GOST 6651-2009 ($\alpha=0.00391$)						°C	-200	850	20k	
PT100J	≈ Pt 100 JIS C1604/1997						°C	-200	850	20k	
PT200J	≈ Pt 200 JIS C1604/1997						°C	-200	850	20k	
PT500J	≈ Pt 500 JIS C1604/1997						°C	-200	850	20k	
PT1000J	≈ Pt 1000 JIS C1604/1997						°C	-200	850	20k	
NI100	≈ NI100 DIN 43760						°C	-60	250	20k	
NI200	≈ NI200 DIN 43760						°C	-60	250	20k	
NI500	≈ NI500 DIN 43760						°C	-60	250	20k	
NI1000	≈ NI1000 DIN 43760						°C	-60	250	20k	
NI100S	≈ NI100 SAMA RC21-4-1966						°C	-60	180	20k	
NI200S	≈ NI200 SAMA RC21-4-1966						°C	-60	180	20k	
NI500S	≈ NI500 SAMA RC21-4-1966						°C	-60	180	20k	
NI1000S	≈ NI1000 SAMA RC21-4-1966						°C	-60	180	20k	
NI1000L	≈ NI1000 Landis&Gyr						°C	-50	160	20k	
CU10	≈ CU10 SAMA RC21-4-1966						°C	-70	500	100k	
CU50	≈ CU50 GOST 6651-2009 ($\alpha=0.00428$)						°C	-50	200	100k	
CU100	≈ CU100 GOST 6651-2009 ($\alpha=0.00428$)						°C	-50	200	100k	
CU53	≈ CU53 GOST 6651-2009 ($\alpha=0.00426$)						°C	-50	180	100k	
KTY81	≈ KTY81 KTY81-110 (Philips)						°C	-55	150	20k	
KTY84	≈ KTY81 KTY84-130 (Philips)						°C	-40	300	20k	
Remote resistance-type sensors (R) (2-, 3-, 4-conductor)	RES02	≈ Resistance 0...75 Ω		Ω	0		75				
	RES03	≈ Resistance 0...150 Ω		Ω	0		150				
	RES04	≈ Resistance 0...300 Ω		Ω	0		300				
	RES05	≈ Resistance 0...600 Ω		Ω	0		600				
	RES06	≈ Resistance 0...1,200 Ω		Ω	0		1200				
	RES07	≈ Resistance 0...2,400 Ω		Ω	0		2400				
	RES08	≈ Resistance 0...4,800 Ω		Ω	0		4800				
	RES09	≈ Resistance 0...6,250 Ω		Ω	0		6250				
	RES10	≈ Resistance 0...12,500 Ω		Ω	0		12500				
	RES11	≈ Resistance 0...25,000 Ω		Ω	0		25000				
	RES12	≈ Resistance 0...50,000 Ω		Ω	0		50,000				



Temperature conversion guide for °C to °F:

$$T [^{\circ}\text{F}] = \frac{9}{5} T [^{\circ}\text{C}] + 32$$

5

Temperature, temperature transducers

new

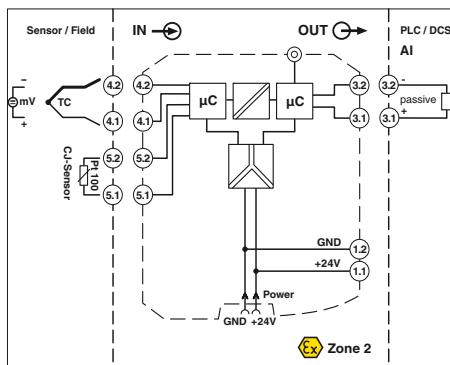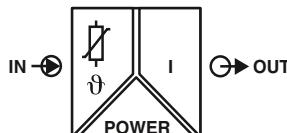

Ex n

SIL
IEC 61508



Temperature transducer
for thermocouples

Housing width 12.5 mm

Technical data

Input data

Thermocouple sensors

B, E, J, K, N, R, S, T, L, U, C, D, A-1, A-2, A-3, M, Lr

Voltage

-1,000 mV ... 1,000 mV

Measuring range span

Min. 50 K with thermocouple, 10% of the nominal span of the respective range with mV sources

Output data

Output signal

0 mA ... 20 mA / 4 mA ... 20 mA (SIL)

Load

≤600 Ω

Behavior in the event of a sensor error

As per NE 43 or can be freely defined

Output ripple

<15 µA_{PP}

General data

Supply voltage range

19.2 V DC ... 30 V DC (24 V DC -20%...+25%)

Current consumption

<40 mA (24 V DC)

Power consumption

≤1 W

Power dissipation

≤0.74 W

Temperature coefficient

0.01%/K

Step response (0 - 99%)

Typically 700 ms

Transmission error, total

≤1,000 ms

Cold junction errors

0.1% x 600 [K]/measuring span; 0.1% >600 [K]

ZERO / SPAN adjustment

± 1 K

Electrical isolation

± 5% / ± 5%

Input/output/power supply

300 V_{me} (rated insulation voltage (overvoltage category II); degree of pollution 2, safe isolation as per EN 61010-1))

2.5 kV (50 Hz, 1 min., test voltage)

Input/output Input/power supply

375 V (peak value in accordance with EN 60079-11)

375 V (peak value in accordance with EN 60079-11)

Ambient temperature range

-40°C ... 70°C (any mounting position)

Humidity

5% ... 95% (non-condensing)

Inflammability class in accordance with UL 94

V0

Housing material

PA 6.6-FR

Dimensions W/H/D

12.5 / 112.5 / 114.5 mm

Screw connection rigid / flexible / AWG

0.2 ... 2.5 mm² / 0.2 ... 2.5 mm² / 24 - 14

Conformance/approvals

2

SIL in accordance with IEC 61508

Ordering data

Description

Type

Order No.

Pcs./Pkt.

MACX MCR-TC-I
MACX MCR-TC-I-C

1050228
1052459

1

1

Accessories

Programming adapter for configuring modules with S-PORT interface

IFS-USB-PROG-ADAPTER

2811271

1

Cold junction compensation connector for thermocouples

IOA MCR-CJC-PT100

1085776

1

MACX Analog – Signal conditioners with functional safety

Order key for MACX MCR-TC-I-C temperature transducers (standard configuration entered as an example)



Order No.	SIL	Sensor type	Measuring unit	Cold junction compensation	Measuring range: Start	Measuring range: End	Output signal	Sliding mean value	Alarm signal, short circuit	Alarm signal, sensor break	Factory calibration certificate
1052459	/ ON /	K	C	ON	-50	150	OUT02	1	I000	I000	NONE
1052459 ≈ MACX MCR-TC-I-C											
ON ≈ Active NONE ≈ Not active ON only with output range = OUT02											
See below											
Celsius [C] Ω [Ω] Millivolts [V]											
ON OFF											
See below											
0...20 mA [OUT01] 4...20 mA [OUT02] 0...5 mA [OUT15] 0...10 mA [OUT16] 1...5 mA [OUT25] 2...10 mA [OUT26]											
1 - 10											
0 mA [I000] 3.5 mA [I035] 21.5 mA [I215]											
0 mA [I000] 3.5 mA [I035] 21.5 mA [I215]											
YES ≈ With FCC (a fee is charged)											
YESPLUS ≈ FCC with 5 measuring points (a fee is charged)											
Smallest measuring range span											
Other setting options can be configured with the IFS-CONF software:											
- Freely configurable user characteristic curve with 30 support points											
- Output behavior in the event of a short circuit, sensor break or over-range/under-range can be freely configured or set in accordance with NE443 (standard configuration: NE443 upscale)											
- Filter setting (standard configuration: 1)											
- Restart after failsafe (standard configuration: ON)											
- Switching behavior: switching output (limit values, times, etc.) (standard configuration: OFF)											
Thermocouples (TC)											
A1G	≈ A-1 GOST 8.585-2001		°C		0		2,500		50k		
A2G	≈ A-2 GOST 8.585-2001		°C		0		1,800		50k		
A3G	≈ A-3 GOST 8.585-2001		°C		0		1,800		50k		
B	≈ B IEC584-1 (Pt30Rh-Pt6Rh)		°C		500		1,820		50k		
C	≈ C ASTM E988		°C		0		2,315		50k		
D	≈ DA ASTM E988(2002)		°C		0		2,315		50k		
E	≈ E IEC584-1 (NiCr-CuNi)		°C		-230		1,000		50k		
J	≈ J IEC584-1 (Fe-CuNi)		°C		-210		1,200		50k		
K	≈ K IEC584-1(NiCr-Ni)		°C		-250		1,372		50k		
MG	≈ MG GOST 8.585-2001		°C		-200		100		50k		
N	≈ N IEC 584-1 (NiCrSi-NiSi)		°C		-200		1,300		50k		
R	≈ R IEC 584-1 (Pt13Rh-Pt)		°C		-50		1,768		50k		
S	≈ S IEC 584-1 (Pt10Rh-Pt)		°C		-50		1,768		50k		
T	≈ T IEC 584-1 (Cu-CuNi)		°C		-200		400		50k		
L	≈ L DIN 43760 (Fe-CuNi)		°C		-200		900		50k		
LG	≈ LG GOST 8.585-2001		°C		-200		800		50k		
U	≈ U DIN 43760 (Cu-CuNi)		°C		-200		600		50k		
V04	≈ Voltage -1,000 mV...+1,000 mV		mV		-1,000		1,000		10% of nominal span		
V05	≈ Voltage -500 mV...+500 mV		mV		-500		500				
V06	≈ Voltage -250 mV...+250 mV		mV		-250		250				
V07	≈ Voltage -125 mV...+125 mV		mV		-125		125				
V08	≈ Voltage -60 mV...+60 mV		mV		-60		60				
V09	≈ Voltage -30 mV...+30 mV		mV		-30		30				
V10	≈ Voltage -15 mV...+15 mV		mV		-15		150				

Temperature conversion guide for °C to °F:

$$T [^{\circ}\text{F}] = \frac{9}{5} T [^{\circ}\text{C}] + 32$$

Digital IN

NAMUR signal conditioners

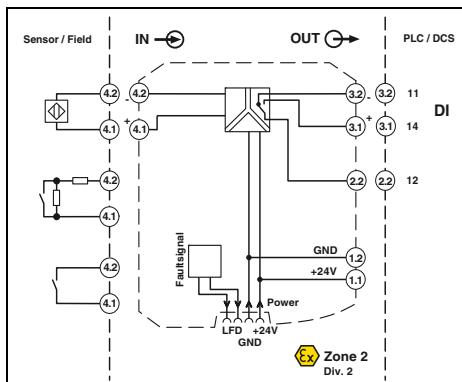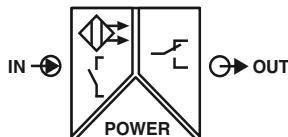

Ex n

SIL
IEC 61508



**NAMUR signal conditioner,
signal output: PDT relay**

Ex n DNV GL Functional Safety

Ex: Ex n

Housing width 12.5 mm

Technical data

Input data

Input signal

No-load voltage

Switching points

Switching hysteresis

Line error detection

Switching output

Contact type

Contact material

Max. switching voltage

Maximum switching capacity

Recommended minimum load

Mechanical service life

Switching behavior

Maximum switching frequency

General data

Supply voltage range

Current consumption

Power dissipation

Electrical isolation

Input/output

Input/output/supply, DIN rail connector

NAMUR proximity sensors (EN 60947-5-6)

open circuit switch contacts

Switch contacts with resistance circuit

~ 8 V DC

>2.1 mA (conductive) / <1.2 mA (blocking)

<0.2 mA

Break 0.05 mA <IN <0.35 mA

Short circuit 100 Ω <RSensor <360 Ω

Relay output

1 PDT

AgSnO₂, hard gold-plated

250 V AC (2 A) / 120 V DC (0.2 A) / 30 V DC (2 A)

500 VA

5 V / 10 mA

10⁷ cycles

Can be inverted via slide switch

≤20 Hz (without load)

19.2 V DC ... 30 V DC (24 V DC -20%...+25%)

21 mA (24 V DC)

<650 mW

375 V (peak value in accordance with EN 60079-11)

300 V_{rms} (rated insulation voltage (overvoltage category II);

degree of pollution 2, safe isolation as per EN 61010-1)

2.5 kV (50 Hz, 1 min., test voltage)

Output/input, supply, TBUS

Input/supply, DIN rail connector

300 V_{rms} (rated insulation voltage (overvoltage category III);

degree of pollution 2, safe isolation as per EN 61010-1))

2.5 kV (50 Hz, 1 min., test voltage)

375 V (peak value in accordance with EN 60079-11)

-20°C ... 60°C (any mounting position)

10% ... 95% (non-condensing)

V0

PA 6.6-FR

12.5 / 112.5 / 114.5 mm

0.2 ... 2.5 mm² / 0.2 ... 2.5 mm² / 24 - 14

0.2 ... 1.5 mm² / 0.2 ... 1.5 mm² / 24 - 16

CE-compliant, additionally EN 61326-1

Ex II 3 G Ex nA nC IIC T4 Gc X

UL 508 Listed

UL 61010 Listed

Class I, Div. 2, Groups A, B, C, D T4

Class I, Zone 2, Group IIC T4

2

Ordering data

Description

Type

Order No.

Pcs./Pkt.

NAMUR signal conditioners



Screw connection
Push-in connection

MACX MCR-SL-NAM-R
MACX MCR-SL-NAM-R-SP

2865997
2924252

1
1

Digital IN NAMUR signal conditioners

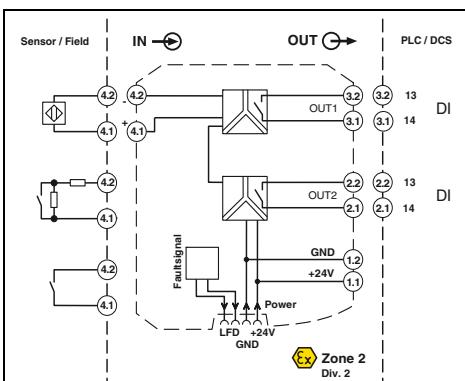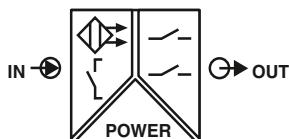

Ex
n

SIL
IEC 61508



NAMUR signal conditioner,
2 signal outputs: N/O relay

DNV GL Functional Safety

Ex: Ex n

Housing width 12.5 mm

Technical data



Input data	NAMUR proximity sensors (EN 60947-5-6) open circuit switch contacts Switch contacts with resistance circuit ~ 8 V DC >2.1 mA (conductive) / <1.2 mA (blocking) <0.2 mA Break 0.05 mA <IIN <0.35 mA Short circuit 100 Ω <RSensor <360 Ω	
Input signal		
No-load voltage		
Switching points		
Switching hysteresis		
Line error detection		
Switching output	Relay output 2 N/O contacts AgSnO ₂ , hard gold-plated 250 V AC (2 A) / 120 V DC (0.2 A) / 30 V DC (2 A) 500 VA 5 V / 10 mA 10 ⁷ cycles Can be inverted via slide switch ≤20 Hz (without load)	
Contact type		
Contact material		
Max. switching voltage		
Maximum switching capacity		
Recommended minimum load		
Mechanical service life		
Switching behavior		
Maximum switching frequency		
General data	Supply voltage range Current consumption Power dissipation Electrical isolation	
Supply voltage range	19.2 V DC ... 30 V DC (24 V DC -20...+25%)	
Current consumption	30 mA (24 V DC)	
Power dissipation	<950 mW	
Electrical isolation	300 V _{rms} (rated insulation voltage (overvoltage category II; degree of pollution 2, safe isolation as per EN 61010-1))	
	Input/supply, DIN rail connector	
	Output 1/output 2/input/power supply, DIN rail connector	
Ambient temperature range	2.5 kV (50 Hz, 1 min., test voltage)	
Humidity	-20°C ... 60°C (any mounting position) 10% ... 95% (non-condensing)	
Inflammability class in accordance with UL 94	V0	
Housing material	PA 6.6-FR	
Dimensions W/H/D	12.5 / 112.5 / 114.5 mm	
Screw connection rigid / flexible / AWG	0.2 ... 2.5 mm ² / 0.2 ... 2.5 mm ² / 24 - 14	
Push-in connection rigid / flexible / AWG	0.2 ... 1.5 mm ² / 0.2 ... 1.5 mm ² / 24 - 16	
Conformance/approvals	CE-compliant, additionally EN 61326-1 Ex II 3 G Ex nA nC IIC T4 Gc X	
Conformance	UL 508 Listed	
ATEX	UL 61010 Listed	
UL, USA/Canada	Class I, Div. 2, Groups A, B, C, D T4 Class I, Zone 2, Group IIC T4	
SIL in accordance with IEC 61508	2	

Ordering data

Description	Type	Order No.	Pcs./Pkt.
NAMUR signal conditioners			
	Screw connection	MACX MCR-SL-NAM-2RO	1
	Push-in connection	MACX MCR-SL-NAM-2RO-SP	1

Digital IN

NAMUR signal conditioners

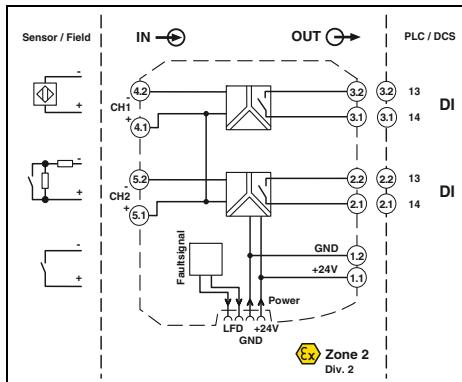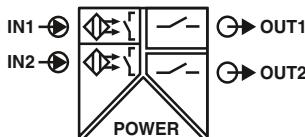

**NAMUR signal conditioner, 2-channel,
output: 1 N/O contact per channel**

DNV GL Functional Safety

Ex:

Housing width 12.5 mm

Technical data

Input data

Input signal

No-load voltage

Switching points

Switching hysteresis

Line error detection

NAMUR proximity sensors (EN 60947-5-6)

open circuit switch contacts

Switch contacts with resistance circuit

~ 8 V DC

>2.1 mA (conductive) / <1.2 mA (blocking)

<0.2 mA

Break 0.05 mA <IN <0.35 mA

Short circuit 100 Ω <RSensor <360 Ω

Relay output

1 N/O contact per channel

AgSnO₂, hard gold-plated

250 V AC (2 A) / 120 V DC (0.2 A) / 30 V DC (2 A)

500 VA

5 V / 10 mA

10⁷ cycles

Can be inverted via slide switch

≤20 Hz (without load)

19.2 V DC ... 30 V DC (24 V DC -20%...+25%)

35 mA (24 V DC)

<1 W

300 V_{rms} (rated insulation voltage (overvoltage category II); degree of pollution 2, safe isolation as per EN 61010-1))

300 V_{rms} (rated insulation voltage (overvoltage category III); degree of pollution 2, safe isolation as per EN 61010-1))

Ambient temperature range

-20°C ... 60°C (any mounting position)

Humidity

5% ... 95% (non-condensing)

Inflammability class in accordance with UL 94

V0

Housing material

PA 6.6-FR

Dimensions W/H/D

12.5 / 112.5 / 114.5 mm

Screw connection rigid / flexible / AWG

0.2 ... 2.5 mm² / 0.2 ... 2.5 mm² / 24 - 14

Push-in connection rigid / flexible / AWG

0.2 ... 1.5 mm² / 0.2 ... 1.5 mm² / 24 - 16

Conformance/approvals

CE-compliant, additionally EN 61326-1

Conformance

Ex II 3 G Ex nA nC IIC T4 Gc X

ATEX

UL 508 Listed

UL 61010 Listed

Class I, Div. 2, Groups A, B, C, D T4

Information about the supply and error evaluation module as well as about the DIN rail connectors and marking material can be found from page 175

Class I, Zone 2, Group IIC T4

Information about resistance circuits is given on page 177

2

Information on "Plug and play" connection using system cabling can be found from page 170

SIL in accordance with IEC 61508

Ordering data

Description

NAMUR signal conditioner

Screw connection
Push-in connection

Type



MACX MCR-SL-2NAM-RO
MACX MCR-SL-2NAM-RO-SP

Order No.

2865049
2924294

1
1

Digital IN NAMUR signal conditioners

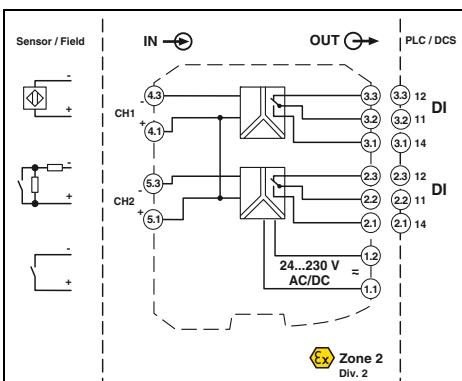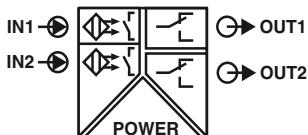

Ex n

SIL
IEC 61508



NAMUR signal conditioner, 2-channel,
output: 1 N/O contact per channel,
with wide range supply

EN-IEC Functional Safety

Ex-Ex

Housing width 17.5 mm

Technical data

Input data	Input signal	NAMUR proximity sensors (EN 60947-5-6) open circuit switch contacts Switch contacts with resistance circuit ~ 8 V DC >2.1 mA (conductive) / <1.2 mA (blocking) <0.2 mA Break 0.05 mA <IIN <0.35 mA Short circuit 100 Ω <RSensor <360 Ω
No-load voltage	Switching points Switching hysteresis Line error detection	Relay output 1 PDT per channel AgSnO ₂ , hard gold-plated 250 V AC (2 A, 60 Hz) / 120 V DC (0.2 A) / 30 V DC (2 A) 500 VA 5 V / 10 mA 10 ⁷ cycles Can be inverted using DIP switch ≤20 Hz (load-dependent)
Switching output	Contact type Contact material Max. switching voltage Maximum switching capacity Recommended minimum load Mechanical service life Switching behavior Maximum switching frequency	General data Supply voltage range Current consumption Power dissipation Electrical isolation
General data	Input/output Input/power supply	19.2 V AC/DC ... 253 V AC/DC (24 V AC/DC ... 230 V AC/DC (-20% ... +10%, 50/60 Hz)) <80 mA ; <42 mA (24 V DC) ≤1.3 W
Ambient temperature range Humidity Inflammability class in accordance with UL 94	Input/output Input/power supply	375 V (peak value in accordance with EN 60079-11) 375 V (peak value in accordance with EN 60079-11) 300 V _{rms} (rated insulation voltage (overvoltage category II; degree of pollution 2, safe isolation as per EN 61010-1)) 2.5 kV AC (50 Hz, 1 min., test voltage)
Housing material Dimensions W/H/D Screw connection rigid / flexible / AWG Push-in connection rigid / flexible / AWG	Conformance ATEX UL, USA/Canada	-20°C ... 60°C 10% ... 95% (non-condensing) V0 PA 6.6-FR 17.5 / 112.5 / 114.5 mm 0.2 ... 2.5 mm ² / 0.2 ... 2.5 mm ² / 24 - 14 0.2 ... 1.5 mm ² / 0.2 ... 1.5 mm ² / 24 - 16
Conformance/approvals	SIL in accordance with IEC 61508	CE-compliant, additionally EN 61326-1 Ex II 3 G Ex nA nC IIC T4 Gc X UL 508 Listed UL 61010 Listed Class I, Div. 2, Groups A, B, C, D T4 Class I, Zone 2, Group IIC T4 2
Ordering data		
Description	Type	Order No.
NAMUR signal conditioner	Screw connection Push-in connection	MACX MCR-SL-2NAM-R-UP MACX MCR-SL-2NAM-R-UP-SP
		2865052 2924304
		1 1

NAMUR signal conditioners for operating proximity sensors and mechanical contacts



- 2-channel
- Input for NAMUR proximity sensors (EN 60947-5-6), floating contacts or contacts with resistance circuit
- Relay signal output (PDT)
- Reversible direction of action (operating current or closed-circuit current behavior)
- Line fault detection (LFD) can be activated and deactivated, error indicated by red flashing led and de-excitation of the output relay
- Wide-range power supply of 19.2 to 253 V AC/DC
- LED displays for indicating supply voltage, circuit state, and malfunctions to NAMUR NE 44
- 3-way electrical isolation
- Up to SIL 2 in accordance with IEC 61508
- Installation in zone 2 permitted

Notes:

Information on resistance circuits and marking material can be found on page 177

Digital IN

NAMUR signal conditioners

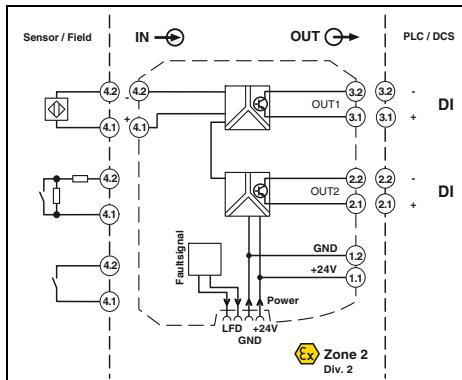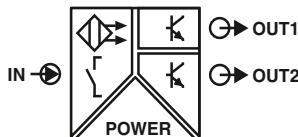

Ex n

SIL
IEC 61508



**NAMUR signal conditioner:
2 signal outputs: transistor (passive)**

DNV GL Functional Safety

Ex:

Housing width 12.5 mm

Technical data

Input data

Input signal

No-load voltage

Switching points

Line error detection

Switching output

Max. switching voltage

Maximum switching current

Drop (ΔU)

Switching behavior

Maximum switching frequency

General data

Supply voltage range

Current consumption

Power dissipation

Electrical isolation

Input/output/supply, DIN rail connector

Output 1/output 2

Ambient temperature range

Humidity

Inflammability class in accordance with UL 94

Housing material

Dimensions W/H/D

Screw connection rigid / flexible / AWG

Push-in connection rigid / flexible / AWG

Conformance/approvals

Conformance

ATEX

UL, USA/Canada

SIL in accordance with IEC 61508

NAMUR proximity sensors (EN 60947-5-6)

open circuit switch contacts

Switch contacts with resistance circuit

~ 8 V DC

>2.1 mA (conductive) / <1.2 mA (blocking)

Break 0.05 mA < I_{IN} < 0.35 mA

Short circuit 100 Ω < R_{Sensor} < 360 Ω

2 transistor outputs, passive

30 V DC

50 mA (short-circuit-proof)

<1.4 V

Can be inverted using DIP switch

≤ 5 kHz

19.2 V_{rms} (rated insulation voltage (overvoltage category II))

degree of pollution 2, safe isolation as per EN 61010-1)

2.5 kV (50 Hz, 1 min., test voltage)

50 V_{rms} (rated insulation voltage (overvoltage category II);
degree of pollution 2, basic insulation as per EN 61010-1))

1 kV (50 Hz, 1 min., test voltage)

-20°C ... 60°C (any mounting position)

10% ... 95% (non-condensing)

V0

PA 6.6-FR

12.5 / 112.5 / 114.5 mm

0.2 ... 2.5 mm² / 0.2 ... 2.5 mm² / 24 - 14

0.2 ... 1.5 mm² / 0.2 ... 1.5 mm² / 24 - 16

CE-compliant, additionally EN 61326-1

Ex II 3 G Ex nA IIC T4 Gc X

UL 508 Listed

UL 61010 Listed

Class I, Div. 2, Groups A, B, C, D T4

Class I, Zone 2, Group IIC T4

2

Ordering data

Description

NAMUR signal conditioner

Type

Order No.

Pcs./Pkt.

Screw connection
Push-in connection

MACX MCR-SL-NAM-2T
MACX MCR-SL-NAM-2T-SP

2865023
2924278

1
1



Notes:

Information about the supply and error evaluation module as well as about the DIN rail connectors and marking material can be found from page 175

Information about resistance circuits is given on page 177

Information on "Plug and play" connection using system cabling can be found from page 170

Digital IN NAMUR signal conditioners

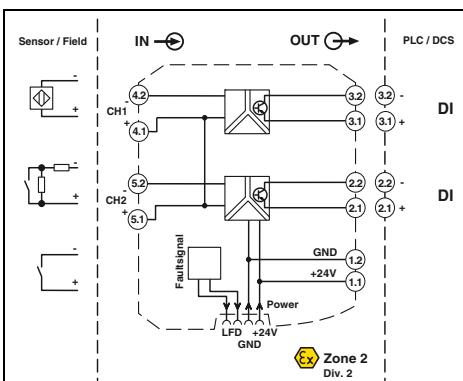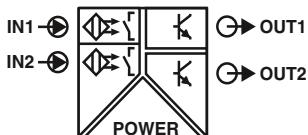

Ex
Ex n

SIL
IEC 61508



NAMUR signal conditioner, 2-channel,
signal output: transistor (passive)

DNV GL Functional Safety

Ex: Ex n

Housing width 12.5 mm

Technical data



Input data	
Input signal	
No-load voltage	NAMUR proximity sensors (EN 60947-5-6) open circuit switch contacts
Switching points	Switch contacts with resistance circuit
Line error detection	~ 8 V DC
Switching output	>2.1 mA (conductive) / <1.2 mA (blocking)
Max. switching voltage	Break 0.05 mA <IIN <0.35 mA
Maximum switching current	Short circuit 100 Ω <RSensor <360 Ω
Drop (ΔU)	1 transistor output, passive (per channel)
Switching behavior	30 V DC
Maximum switching frequency	50 mA (short-circuit-proof)
General data	<1.4 V
Supply voltage range	Can be inverted using DIP switch
Current consumption	≤5 kHz
Power dissipation	19.2 V DC ... 30 V DC (24 V DC -20%...+25%)
Electrical isolation	<34 mA (24 V DC)
	1,000 mW
	300 V _{rms} (rated insulation voltage (overvoltage category II); degree of pollution 2, safe isolation as per EN 61010-1)) 2.5 kV (50 Hz, 1 min., test voltage)
	50 V _{rms} (rated insulation voltage (overvoltage category II); degree of pollution 2, basic insulation as per EN 61010-1)) 1 kV (50 Hz, 1 min., test voltage)
Ambient temperature range	-20°C ... 60°C (any mounting position)
Humidity	10% ... 95% (non-condensing)
Inflammability class in accordance with UL 94	V0
Housing material	PA 6.6-FR
Dimensions W/H/D	12.5 / 112.5 / 114.5 mm
Screw connection rigid / flexible / AWG	0.2 ... 2.5 mm ² / 0.2 ... 2.5 mm ² / 24 - 14
Push-in connection rigid / flexible / AWG	0.2 ... 1.5 mm ² / 0.2 ... 1.5 mm ² / 24 - 16
Conformance/approvals	
Conformance	CE-compliant, additionally EN 61326
ATEX	Ex II 3 G Ex nA IIC T4 Gc X
UL, USA/Canada	UL 508 Listed
	UL 61010 Listed
	Class I, Div. 2, Groups A, B, C, D T4
	Class I, Zone 2, Group II CT4
	2

Ordering data

Description	Type	Order No.	Pcs./Pkt.
NAMUR signal conditioner			
	Screw connection	MACX MCR-SL-2NAM-T	2865036
	Push-in connection	MACX MCR-SL-2NAM-T-SP	2924281
			1
			1

Limit values, threshold value switches

new

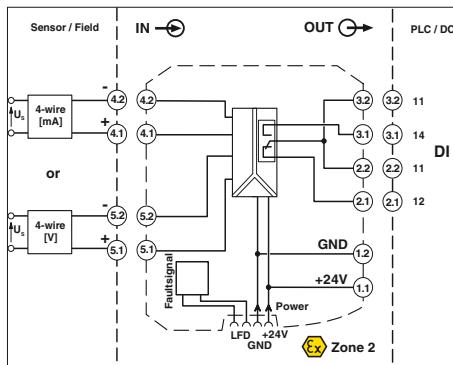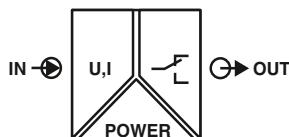

Configurable, with relay PDT output



Ex: IECEx

Housing width 12.5 mm

Technical data

- Input for analog standard current and voltage signals for switching analog limit values
- Safe 3-way isolation
- Configure limit values via DIP switch
- PDT relay at output
- Limiting continuous current up to 6 A
- Energy can be supplied via the DIN rail connector
- Status and error indicator LEDs
- Up to SIL 3 in accordance with IEC 61508
- PLC in accordance with ISO 13849
- Installation in zone 2 possible

Input data

Voltage input signal

0.1 V ... 10 V

0.1 V ... 10.5 V (maximum range)

± 10 mV

0.2 mA ... 20 mA

0.18 mA ... 21 mA (maximum range)

± 20 μ A

$<28 \Omega / >100$ k Ω

- / configurable via DIP switch (in 1.25% increments) and potentiometer (linearly up to 2% of the switching threshold set via the DIP switch)

Total error of the voltage input maximum

Current input signal

Current/voltage input

Total error of the current input maximum

Input resistance

Switching points

Switching hysteresis

Line error detection

Off: approx. 0.5%, on: approx. 1%

Break U <50 mV, I <0.1 mA

Short circuit U >10.8 V, I >21.1 mA

Switching output

Relay output

Contact type

1 PDT

Maximum switching current

≤ 4 A AC (cos phi = 1)

Mechanical service life

$\leq 10^7$ cycles

Switching voltage

≤ 250 V AC

≤ 120 V DC

General data

9.6 V DC ... 30 V DC (12 V DC ... 24 V DC (-20% ... +25%))

Supply voltage range

90 mA (10 V DC)

38 mA (24 V DC)

≤ 30 mA (30 V DC)

Current consumption, maximum

≤ 1.2 W

Current consumption, typical

<0.9 W

Current draw

0.01%/K

Power consumption

≤ 22 ms

Power dissipation

$<0.1\%$

Temperature coefficient

0.1%

Step response (0 - 99%)

Electrical isolation

375 V (peak value in accordance with EN 60079-11)

Input/output

300 V _{rms} (rated insulation voltage (overvoltage category II; degree of pollution 2, safe isolation as per EN 61010-1))

2.5 kV (50 Hz, 1 min., test voltage)

Ambient temperature (operation)

-20°C ... 65°C (any mounting position)

Ambient temperature (storage/transport)

-40°C ... 85°C

Humidity

5% ... 95% (non-condensing)

Altitude

$\leq 2,000$ m

Inflammability class in accordance with UL 94

V0

Dimensions W/H/D

12.5 / 99 / 114.5 mm

Conformance/approvals

CE-compliant, additionally EN 61326

Conformance

Ex II 3 G Ex ec nC IIC T4 Gc

ATEX

UL applied for

UL, USA/Canada

2 (single-channel)

SIL in accordance with IEC 61508

3 (two-channel)



Ordering data

Description	Type	Order No.	Pcs./Pkt.
Screw connection	MACX MCR-SL-UI-REL	2906169	1
Spring-cage connection	MACX MCR-SL-UI-REL-SP	2906170	1

MACX Analog – Ex i signal conditioners with functional safety

Analog IN

Repeater power supplies, Ex i

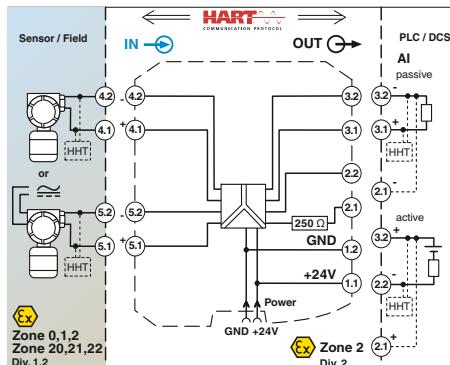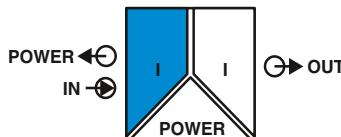

**Repeater power supply
and input signal conditioner**

Functional Safety
Ex: EAC Ex IECEx KC-s
Housing width 12.5 mm

Technical data

Repeater power supply and input signal conditioners for the operation of intrinsically safe (Ex i) 2-conductor measuring transducers, 4-conductor measuring transducers, and mA current sources installed in Ex areas.

- 0/4 to 20 mA input, [Ex ia] (powered or not powered)
- 0/4 to 20 mA output (active or passive)
- Bidirectional transmission of digital HART communication signals
- Plug-in screw or Push-in connection technology, with integrated sockets for HART communicators
- Terminal point with 250 Ω resistor to increase the HART impedance in the case of low-impedance systems
- 3-way electrical isolation
- Power supply via DIN rail connector possible
- Up to SIL 2 in accordance with IEC 61508
- Installation in zone 2 permitted

Notes:

Information about the supply and error evaluation module as well as about the DIN rail connectors and marking material can be found from page 175



Test plugs for test sockets can be found on page 177

Information on "Plug and play" connection using system cabling can be found from page 170

Input data	4 mA ... 20 mA
Input signal	>16 V (20 mA)
Transmitter supply voltage	<3.5 V (in input signal conditioner operation)
Voltage drop	
Output data	
Output signal	
Load	4 mA ... 20 mA (active)
Output ripple	4 mA ... 20 mA (14 ... 26 V ext. source voltage)
General data	<1,000 Ω (20 mA)
Supply voltage range	<20 mV _{rms}
Current consumption	
Power dissipation	
Temperature coefficient	19.2 V DC ... 30 V DC (24 V DC -20%...+25%)
Step response (10-90%)	<76 mA (24 V DC / 20 mA / 1,000 Ω) ; <55 mA (24 V DC / 20 mA / 250 Ω) <1.1 W (24 V DC / 20 mA / 1,000 Ω) <0.95 W (24 V DC / 20 mA / 250 Ω) <1.2 W (24 V DC / 20 mA / 0 Ω)
Transmission error, typical	<0.01%/K
Maximum transmission error	<200 μs (for jump 4 mA ... 20 mA, load 600 Ω)
Under-/overload range	
Electrical isolation	
Input/output/power supply	
Ambient temperature range	300 V _{rms} (rated insulation voltage (overvoltage category II); degree of pollution 2, safe isolation as per EN 61010-1)) 2.5 kV (50 Hz, 1 min., test voltage)
Humidity	375 V (peak value in accordance with EN 60079-11)
Status indication	375 V (peak value in accordance with EN 60079-11)
SMART communication	-20°C ... 60°C (any mounting position)
Signal bandwidth	10% ... 95% (non-condensing)
Protocols supported	Green LED (supply voltage)
Inflammability class in accordance with UL 94	Yes
Housing material	as per HART specifications
Dimensions W/H/D	HART
Screw connection rigid / flexible / AWG	V0
Push-in connection rigid / flexible / AWG	PA 6.6-FR
	12.5 / 112.5 / 114.5 mm
Safety data as per ATEX	0.2 ... 2.5 mm ² / 0.2 ... 2.5 mm ² / 24 - 14
Maximum output voltage U _o	0.2 ... 1.5 mm ² / 0.2 ... 1.5 mm ² / 24 - 16
Maximum output current I _o	
Maximum output power P _o	
Maximum voltage U _m	
Conformance/approvals	
Conformance	25.2 V
ATEX	93 mA
	587 mW
IECEx	253 V AC (125 V DC)
UL, USA/Canada	
SIL in accordance with IEC 61508	
	CE-compliant, additionally EN 61326
	Ex II (1) G [Ex ia Ga] IIC
	Ex II (1) D [Ex ia Da] IIC
	Ex II 3 (1) G Ex nA [ia Ga] IIC T4 Gc
	I (M1) [Ex ia Ma] I
	[Ex ia Ga] IIC, [Ex ia Da] IIC, Ex nA [ia Ga] IIC T4 Gc
	UL 61010 Listed
	Class I Div 2; IS for Class I, II, III Div 1
	2

Ordering data

Description	Type	Order No.	Pcs./Pkt.
Repeater power supply, HART®-transparent, intrinsically safe input	Screw connection Push-in connection	MACX MCR-EX-SL-RPSSI-I MACX MCR-EX-SL-RPSSI-I-SP	2865340 2924016
			1 1

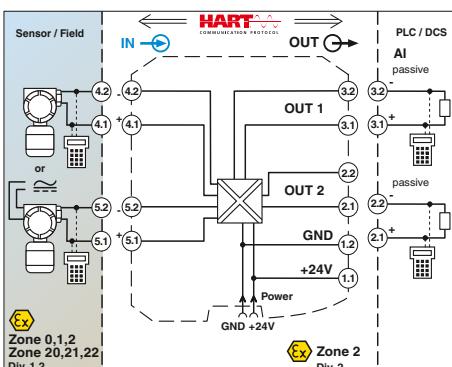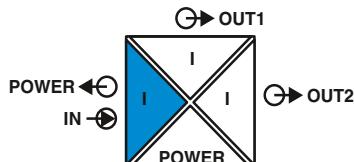Analog IN**Repeater power supplies, Ex i**

**Repeater power supply
and input signal conditioner,
with two electrically isolated outputs**

Functional Safety

Ex: EAC Ex IECEx

Housing width 12.5 mm

Technical data

Input data	4 mA ... 20 mA / 0 mA ... 20 mA
Input signal	>16 V (20 mA)
Transmitter supply voltage	Approx. 3.9 V (in input signal conditioner operation)
Voltage drop	
Output data	4 mA ... 20 mA (output 1 and output 2 active)
Output signal (per output)	
Load	<450 Ω (20 mA)
Output ripple	<20 mV _{rms}
General data	
Supply voltage range	19.2 V DC ... 30 V DC (24 V DC -20%...+25%)
Current consumption	<75 mA (24 V DC / 20 mA)
Power dissipation	<1.45 W (24 V DC / 20 mA)
Temperature coefficient	<0.01%/K
Step response (10-90%)	1.3 ms (for jump 4 mA ... 20 mA, typical)
Transmission error, typical	<0.05% (of final value)
Maximum transmission error	<0.1% (of final value)
Under-/overload range	In accordance with NE 43
Electrical isolation	
Input/output/power supply	300 V _{rms} (rated insulation voltage (overvoltage category II); degree of pollution 2, safe isolation as per EN 61010-1))
Ambient temperature range	1.9.2 V DC ... 30 V DC (24 V DC -20%...+25%)
Status indication	2.5 kV (50 Hz, 1 min., test voltage)
SMART communication (per output)	
Protocols supported	375 V (peak value in accordance with EN 60079-11)
Housing material	375 V (peak value in accordance with EN 60079-11)
Dimensions W/H/D	1.9.5 kV AC (50 Hz, 1 min., test voltage)
Screw connection rigid / flexible / AWG	-20°C ... 60°C (any mounting position)
Push-in connection rigid / flexible / AWG	Green LED (PWR supply voltage)
Safety data as per ATEX	Yes
Maximum output voltage U _o	HART
Maximum output current I _o	PA 6.6-FR
Maximum output power P _o	12.5 / 99 / 114.5 mm
Maximum voltage U _m	0.2 ... 2.5 mm ² / 0.2 ... 2.5 mm ² / 24 - 14
Conformance/approvals	0.2 ... 1.5 mm ² / 0.2 ... 1.5 mm ² / 24 - 16
Conformance	
ATEX	25.2 V
IECEx	93 mA
UL, USA/Canada	587 mW
SIL in accordance with IEC 61508	253 V AC (125 V DC)
	CE-compliant, additionally EN 61326
	Ex II (1) G [Ex ia Ga] IIC
	Ex II (1) D [Ex ia Da] IIC
	Ex II 3 (1) G Ex nA [ia Ga] IIC T4 Gc
	[Ex ia Ga] IC, [Ex ia Da] IIC, Ex nA [ia Ga] IIC T4 Gc
	Class I Div 2; IS for Class I, II, III Div 1
	2



Ordering data

Description	Type	Order No.	Pcs./Pkt.
Repeater power supply, HART®-transparent, intrinsically safe input	Screw connection Push-in connection	MACX MCR-EX-SL-RPSSI-2I MACX MCR-EX-SL-RPSSI-2I-SP	2865366 2924236
With just one HART-transparent output	Screw connection Push-in connection	MACX MCR-EX-SL-RPSSI-2I-1S MACX MCR-EX-SL-RPSSI-2I-1S-SP	2908855 2908856

MACX Analog – Ex i signal conditioners with functional safety

Analog IN

Repeater power supplies, Ex i

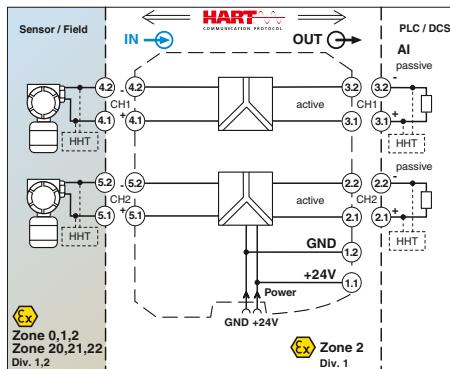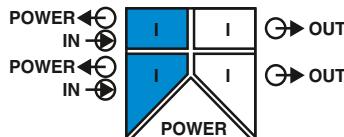

2-channel repeater power supply

Repeater power supply for the operation of intrinsically safe (Ex i) 2-conductor measuring transducers installed in the Ex area.

- 2-channel
- 4 to 20 mA input, [Ex ia] (powered)
- 4 to 20 mA output (active)
- Bidirectional transmission of digital HART communication signals
- Plug-in screw or Push-in connection technology, with integrated sockets for HART communicators
- Safe 3-way electrical isolation
- Power supply via DIN rail connector possible
- Up to SIL 3 in accordance with IEC 61508
- PL d in accordance with EN ISO 13849-1
- Installation in zone 2 permitted

Notes:

Information on the supply and error evaluation module, DIN rail connectors, system cabling, and marking material can be found from page 175

Test plugs for test sockets can be found on page 177

Information on "Plug and play" connection using system cabling can be found from page 170



Technical data	
Input data	per channel
Input signal	4 mA ... 20 mA
Transmitter supply voltage	>16 V (20 mA)
Underload/overload signal range	0 mA ... 24 mA
Output data	per channel
Output signal	4 mA ... 20 mA (active)
Load	≤450 Ω (20 mA)
Underload/overload signal range	0 mA ... 24 mA
General data	
Supply voltage range	19.2 V DC ... 30 V DC (24 V DC -20%...+25%)
Current consumption	<100 mA (24 V / 20 mA)
Power dissipation	<1.4 W (at 24 V DC / 20 mA)
Temperature coefficient	<0.01%/K
Step response (10-90%)	<1.3 ms (for 4 mA ... 20 mA step)
Transmission error, typical	<0.05% (of final value)
Maximum transmission error	<0.1% (of final value)
Electrical isolation	
	Input/output, power supply
Ambient temperature range	300 V _{rms} (rated insulation voltage (overvoltage category II); degree of pollution 2, safe isolation as per EN 61010-1); 2.5 kV (50 Hz, 1 min., test voltage)
Status indication	375 V (peak value in accordance with EN 60079-11)
SMART communication	375 V (peak value in accordance with EN 60079-11)
Signal bandwidth	1.5 kV (50 Hz, 1 min., test voltage)
Protocols supported	-20°C ... 60°C (any mounting position)
Housing material	Green LED (supply voltage)
Dimensions W/H/D	Yes
Screw connection rigid / flexible / AWG	as per HART specifications
Push-in connection rigid / flexible / AWG	HART
Safety data as per ATEX	PA 6.6-FR
Maximum output voltage U _o	12.5 / 99 / 114.5 mm
Maximum output current I _o	0.2 ... 2.5 mm ² / 0.2 ... 2.5 mm ² / 24 - 14
Maximum output power P _o	0.2 ... 1.5 mm ² / 0.2 ... 1.5 mm ² / 24 - 16
Maximum voltage U _m	
Conformance/approvals	25.2 V
Conformance	93 mA
ATEX	587 mW
IECEx	253 V AC (125 V DC)
UL, USA/Canada	
SIL in accordance with IEC 61508	CE-compliant, additionally EN 61326
	Ex II (1) G [Ex ia Ga] IIC
	Ex II (1) D [Ex ia Da] IIC
	Ex II 3(1) G Ex nA [ia Ga] IIC T4 Gc
	[Ex ia Ga] IIC, [Ex ia Da] IIC, Ex nA [ia Ga] IIC T4 Gc
	Class I Div 2; IS for Class I, II, III Div 1
	3

Ordering data

Description	Type	Order No.	Pcs./Pkt.
Repeater power supply, 2-channel, HART®-transparent, intrinsically safe input	Screw connection Push-in connection	MACX MCR-EX-SL-RPSS-2I-2I MACX MCR-EX-SL-RPSS-2I-2I-SP	2865382 2924676
			1 1

Analog IN

Repeater power supplies with wide range power supply, Ex i

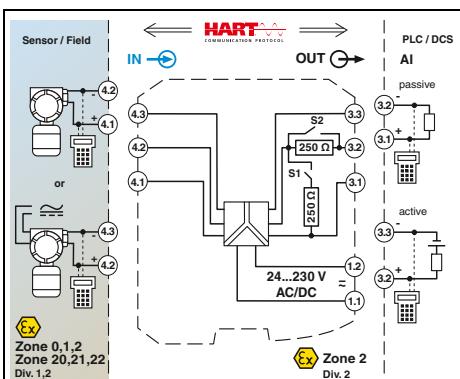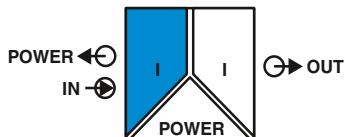

Repeater power supply and input signal conditioner, wide-range power supply

Ex EAC Ex IEC 61508 // Applied for: GL
Housing width 17.5 mm

Technical data

Input data	4 mA ... 20 mA
Input signal	>16 V (20 mA)
Transmitter supply voltage	<3.5 V (in input signal conditioner operation)
Voltage drop	
Output data	4 mA ... 20 mA (active) 4 mA ... 20 mA (14 ... 26 V ext. source voltage) 1 V ... 5 V (internal resistance, 250 Ω, 0.1%) Configurable via DIP switches
Output signal (configurable using the DIP switch)	<600 Ω (20 mA) <20 mV _{rms}
Load	24 V ... 230 V AC/DC (-20%/+10%, 50/60 Hz)
Output ripple	<80 mA (24 V DC / 20 mA)
General data	<1.6 W (24 V DC/ 20 mA) <0.01%/ <600 μs (for 4 mA ... 20 mA step) <0.05% (of final value) <0.1% (of final value) In accordance with NE 43
Supply voltage range	300 V _{rms} (rated insulation voltage (overvoltage category II); degree of pollution 2, safe isolation as per EN 61010-1)) 2.5 kV (50 Hz, 1 min., test voltage)
Current consumption	375 V (peak value in accordance with EN 60079-11)
Power dissipation	375 V (peak value in accordance with EN 60079-11)
Temperature coefficient	-20°C ... 60°C (any mounting position)
Step response (10-90%)	10% ... 95% (non-condensing)
Transmission error, typical	Green LED (supply voltage)
Maximum transmission error	Yes
Under-/overload range	as per HART specifications
Electrical isolation	HART
	V0
Input/output/power supply	PA 6.6-FR
Ambient temperature range	17.5 / 99 / 114.5 mm
Humidity	0.2 ... 2.5 mm ² / 0.2 ... 2.5 mm ² / 24 - 14
Status indication	0.2 ... 1.5 mm ² / 0.2 ... 1.5 mm ² / 24 - 16
SMART communication	25.2 V
Signal bandwidth	93 mA
Protocols supported	587 mW
Inflammability class in accordance with UL 94	253 V AC/DC (supply terminals)
Housing material	253 V AC (output terminals)
Dimensions W/H/D	125 V DC (output terminals)
Screw connection rigid / flexible / AWG	
Push-in connection rigid / flexible / AWG	
Safety data as per ATEX	
Maximum output voltage U _o	CE-compliant, additionally EN 61326
Maximum output current I _o	Ex II (1) G [Ex ia Ga] IIC/IIB
Maximum output power P _o	Ex II (1) D [Ex ia Da] IIC
Maximum voltage U _m	Ex II 3(1) G Ex nA [ia Ga] IIC/IIB T4 Gc
	[Ex ia Ga] IIC/IIB, [Ex ia Da] IIC, Ex nA [ia Ga] IIC/IIB T4 Gc
Conformance/approvals	Class I Div 2; IS for Class I, II, III Div 1
Conformance	2
ATEX	
IECEx	
UL, USA/Canada	
SIL in accordance with IEC 61508	



Ordering data

Description	Type	Order No.	Pcs./Pkt.
Repeater power supply, 2-channel, HART®-transparent, intrinsically safe input	Screw connection	MACX MCR-EX-SL-RPSSI-I-UP	2865793
	Push-in connection	MACX MCR-EX-SL-RPSSI-I-UP-SP	2924029

Temperature

Temperature transducers, Ex i

new

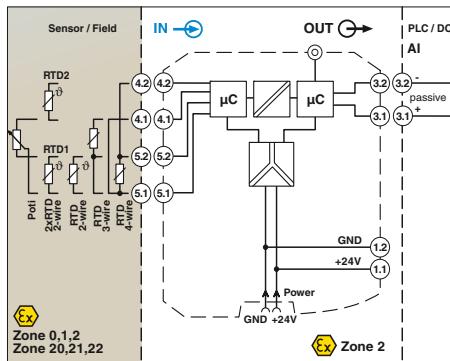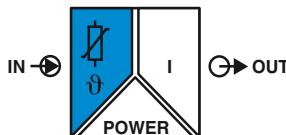

Temperature transducer for resistance thermometers and resistance-type sensors

Programmable temperature transducer for intrinsically safe operation of resistance thermometers and resistance-type sensors installed in Ex areas. The measured values are converted into a linear 0 to 20 mA or 4 to 20 mA signal.

- Input for resistance thermometers and resistance-type sensors, [Ex ia]
- 0 to 20 mA or 4 to 20 mA output
- Configuration via software (FDT/DTM): Sensor type, connection method, measuring range, measuring unit, filter, alarm signal, and output range
- Programming during operation with Ex measuring circuit connected and also voltage-free using IFS-USB-PROG-ADAPTER programming adapter
- Status indicator for supply voltage, cable, sensor, and module errors
- 3-way electrical isolation
- Power supply via DIN rail connector possible
- Installation in zone 2 permitted

Housing width 12.5 mm

Technical data

Input data

Resistance thermometers

Resistor

Cable resistance

Sensor input current

Measuring range span

Output data

Output signal

Load

Behavior in the event of a sensor error

Output ripple

General data

Supply voltage range

Current draw

Power dissipation

Temperature coefficient

Step response (0 - 99%)

Transmission error, total

ZERO / SPAN adjustment

Electrical isolation

Input/output/power supply

Sensors (2-, 3-, 4-conductor)

0 Ω ... 50 kΩ

≤50 Ω per cable

10 μA ... 210 μA (up to 2 x 210 μA for 3-conductor)

≥50 K

0 mA ... 20 mA / 4 mA ... 20 mA (SIL)

≤600 Ω

As per NE 43 or can be freely defined

<15 μA_{PP}

19.2 V DC ... 30 V DC (24 V DC -20%...+25%)

≤40 mA (24 V DC)

≤0.74 W

0.01%/K

Typically 1 s

≤1.7 s

0.1% x 1,000 [K]/measuring span

± 5% / ± 5%

Ambient temperature range

Humidity

Status indication

Input/output/power supply

Input/power supply

Inflammability class in accordance with UL 94

Housing material

Dimensions W/H/D

Screw connection rigid / flexible / AWG

Push-in connection rigid / flexible / AWG

Safety data as per ATEX

Maximum output voltage U_o

Maximum output current I_o

Maximum output power P_o

Conformance/approvals

Conformance

ATEX

IECEx

UL, USA/Canada

300 V_{rms} (rated insulation voltage (overvoltage category II); degree of pollution 2, safe isolation as per EN 61010-1))

2.5 kV (50 Hz, 1 min., test voltage)

375 V (peak value in accordance with EN 60079-11)

375 V (peak value in accordance with EN 60079-11)

-40°C ... 70°C (any mounting position)

5% ... 95% (non-condensing)

Green LED (supply voltage, PWR)

Red LED, flashing 2.4 Hz (cable error, sensor error on input or output, ERR)

Red LED, flashing 1.2 Hz (service operation, ERR)

Red LED, permanently on (module error, ERR)

V0

PA 6.6-FR

12.5 / 112.5 / 114.5 mm

0.2 ... 2.5 mm² / 0.2 ... 2.5 mm² / 24 - 14

0.2 ... 1.5 mm² / 0.2 ... 1.5 mm² / 24 - 16

6 V

16.6 mA

9.7 mW

CE-compliant, additionally EN 61326

Ex II (1) G [Ex ia Ga] IIIC

Ex II (1) D [Ex ia Da] IIIC

Ex II 3(1) G Ex ec ic [ia Ga] IIC T4 Gc X

[Ex ia Ga] IIIC, [Ex ia Da] IIIC, Ex ec ic [ia Ga] IIC T4 Gc

Ordering data

Description

Type

Order No.

Pcs./Pkt.

Screw connection
Push-in connection
Screw connection
Push-in connection

MACX MCR-EX-RTD-I
MACX MCR-EX-RTD-I-SP
MACX MCR-EX-RTD-I-C
MACX MCR-EX-RTD-I-SP-C

1050222

1050252

1052463

1052652

Accessories

Programming adapter for configuring modules with S-PORT interface

IFS-USB-PROG-ADAPTER

2811271

1

MACX Analog – Ex i signal conditioners with functional safety

Order key for MACX MCR-EX-RTD-I-(SP)-C temperature transducers (standard configuration entered as an example)

Order No.	SIL ON/OFF	Sensor type	Measuring unit	Connection technology	Measuring range: Start	End	Output signal	Sliding mean value	Alarm signal, short circuit	Alarm signal, sensor break	Factory calibration certificate	
1052463	ON	PT100	C	4	-50	150	OUT02	1	I000	I000	NONE	
1052463 ≈ MACX MCR-EX-RTD-I-C	ON ≈ Active	See below	Celsius [C]	2 ≈ 2-conductor Ω [Ω]	See below	See below	0...20 mA [OUT01] 4...20 mA [OUT02] 0...5 mA [OUT15] 0...10 mA [OUT16] 1...5 mA [OUT25] 2...10 mA [OUT26]	1 - 10	0 mA [I000] 3.5 mA [I035] 21.5 mA [I215]	0 mA [I000] 3.5 mA [I035] 21.5 mA [I215]	NONE ≈ Without FCC	
1052452 ≈ MACX MCR-EX-RTD-I-SP-C	NONE ≈ Not active ON only with output range = OUT02		Millivolts [V]	3 ≈ 3-conductor 4 ≈ 4-conductor						YES ≈ With FCC (a fee is charged)		
Resistance temperature detector (RTD)	PT50	≈ Pt 50 IEC60751			°C	-200	850	20k	Smallest measuring range span	Other setting options can be configured with the IFS-CONF software:		
	PT100	≈ Pt 100 IEC60751			°C	-200	850	20k				
	PT200	≈ Pt 200 IEC60751			°C	-200	850	20k				
	PT500	≈ Pt 500 IEC60751			°C	-200	850	20k				
	PT1000	≈ Pt 1000 IEC60751			°C	-200	850	20k				
	PT2000	≈ Pt 2000 IEC60751			°C	-200	850	20k				
	PT5000	≈ Pt 5000 IEC60751			°C	-200	850	20k				
	PT50S	≈ PT50 SAMA RC21-4-1966			°C	-200	850	20k				
	PT100S	≈ PT100 SAMA RC21-4-1966			°C	-200	850	20k				
	PT200S	≈ PT200 SAMA RC21-4-1966			°C	-200	850	20k				
	PT500S	≈ PT500 SAMA RC21-4-1966			°C	-200	850	20k				
	PT1000S	≈ PT1000 SAMA RC21-4-1966			°C	-200	850	20k				
	PT2000S	≈ PT2000 SAMA RC21-4-1966			°C	-200	850	20k				
	PT5000S	≈ PT5000 SAMA RC21-4-1966			°C	-200	850	20k				
	PT100G	≈ PT100 G GOST 6651-2009 ($\alpha=0.00391$)			°C	-200	850	20k				
	PT200G	≈ PT200 G GOST 6651-2009 ($\alpha=0.00391$)			°C	-200	850	20k				
	PT500G	≈ PT500 G GOST 6651-2009 ($\alpha=0.00391$)			°C	-200	850	20k				
	PT1000G	≈ PT1000 G GOST 6651-2009 ($\alpha=0.00391$)			°C	-200	850	20k				
	PT100J	≈ Pt 100 JIS C1604/1997			°C	-200	850	20k				
	PT200J	≈ Pt 200 JIS C1604/1997			°C	-200	850	20k				
	PT500J	≈ Pt 500 JIS C1604/1997			°C	-200	850	20k				
	PT1000J	≈ Pt 1000 JIS C1604/1997			°C	-200	850	20k				
	NI100	≈ NI100 DIN 43760			°C	-60	250	20k				
	NI200	≈ NI200 DIN 43760			°C	-60	250	20k				
	NI500	≈ NI500 DIN 43760			°C	-60	250	20k				
	NI1000	≈ NI1000 DIN 43760			°C	-60	250	20k				
	NI100S	≈ NI100 SAMA RC21-4-1966			°C	-60	180	20k				
	NI200S	≈ NI200 SAMA RC21-4-1966			°C	-60	180	20k				
	NI500S	≈ NI500 SAMA RC21-4-1966			°C	-60	180	20k				
	NI1000S	≈ NI1000 SAMA RC21-4-1966			°C	-60	180	20k				
	NI1000L	≈ NI1000 Landis&Gyr			°C	-50	160	20k				
Remote resistance-type sensors (R) (2-, 3-, 4-conductor)	CU10	≈ CU10 SAMA RC21-4-1966			°C	-70	500	100k				
	CU50	≈ CU 50 GOST 6651-2009 ($\alpha=0.00428$)			°C	-50	200	100k				
	CU100	≈ CU 100 GOST 6651-2009 ($\alpha=0.00428$)			°C	-50	200	100k				
	CU53	≈ CU 53 GOST 6651-2009 ($\alpha=0.00426$)			°C	-50	180	100k				
	KTY81	≈ KTY81 KTY81-110 (Philips)			°C	-55	150	20k				
	KTY84	≈ KTY81 KTY81-130 (Philips)			°C	-40	300	20k				
	RES02	≈ Resistance 0...75 Ω			Ω	0	75	10% of the selected measuring range				
	RES03	≈ Resistance 0...150 Ω			Ω	0	150					
	RES04	≈ Resistance 0...300 Ω			Ω	0	300					
	RES05	≈ Resistance 0...600 Ω			Ω	0	600					
	RES06	≈ Resistance 0...1,200 Ω			Ω	0	1200					
	RES07	≈ Resistance 0...2,400 Ω			Ω	0	2400					
	RES08	≈ Resistance 0...4,800 Ω			Ω	0	4800					
	RES09	≈ Resistance 0...6,250 Ω			Ω	0	6250					
	RES10	≈ Resistance 0...12,500 Ω			Ω	0	12500					
	RES11	≈ Resistance 0...25,000 Ω			Ω	0	25000					
	RES12	≈ Resistance 0...50,000 Ω			Ω	0	50,000					

Temperature conversion guide for °C to °F:

$$T [^{\circ}\text{F}] = \frac{9}{5} T [^{\circ}\text{C}] + 32$$



5

MACX Analog – Ex i signal conditioners with functional safety

Temperature

Temperature transducers, Ex i

new

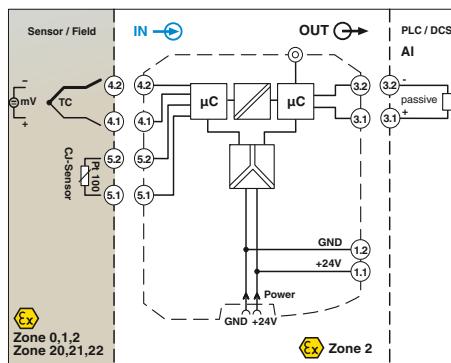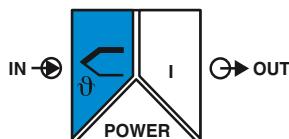

Temperature transducer
for thermocouples

Programmable temperature transducer for intrinsically safe operation of thermocouples and mV sources installed in Ex areas. The measured values are converted into a linear 0 to 20 mA or 4 to 20 mA signal.

- Input for thermocouples and mV sources, [Ex ia]
- 0 to 20 mA or 4 to 20 mA output
- Configuration via software (FDT/DTM): Sensor type, connection method, measuring range, measuring unit, filter, alarm signal, and output range
- Programming during operation with Ex measuring circuit connected and also voltage-free using IFS-USB-PROG-ADAPTER programming adapter
- Status indicator for supply voltage, cable, sensor, and module errors
- 3-way electrical isolation
- Power supply via DIN rail connector possible
- Installation in zone 2 permitted

Housing width 12.5 mm

Technical data

Input data

Thermocouple sensors

Voltage

Measuring range span

Output data

Output signal

Load

Behavior in the event of a sensor error

Output ripple

General data

Supply voltage range

Current consumption

Power dissipation

Temperature coefficient

Step response (0 - 99%)

Transmission error, total

Cold junction errors

ZERO / SPAN adjustment

Electrical isolation

Input/output/power supply

Ambient temperature range

Humidity

Status indication

Input/output/power supply

Inflammability class in accordance with UL 94

Housing material

Dimensions W/H/D

Screw connection rigid / flexible / AWG

Safety data as per ATEX

Maximum output voltage U_o

Maximum output current I_o

Maximum output power P_o

Maximum voltage U_m

Conformance/approvals

Conformance

ATEX

IECEx

UL, USA/Canada

300 V_{rms} (rated insulation voltage (overvoltage category II); degree of pollution 2, safe isolation as per EN 61010-1); 2.5 kV (50 Hz, 1 min., test voltage)

375 V (peak value in accordance with EN 60079-11)

375 V (peak value in accordance with EN 60079-11)

-40°C ... 70°C (any mounting position)

5% ... 95% (non-condensing)

Green LED (supply voltage, PWR)

Red LED, flashing 2.4 Hz (cable error, sensor error on input or output, ERR)

Red LED, flashing 1.2 Hz (service operation, ERR)

Red LED, permanently on (module error, ERR)

V0

PA 6.6-FR

12.5 / 112.5 / 114.5 mm

0.2 ... 2.5 mm² / 0.2 ... 2.5 mm² / 24 - 14

6 V

4.3 mA

9.7 mW

253 V AC (125 V DC)

CE-compliant, additionally EN 61326

Ex II (1) G [Ex ia Ga] IIC/IIB

Ex II (1) D [Ex ia Da] IIC

Ex II 3(1) G Ex ec ic [ia Ga] IIC T4 Gc X

[Ex ia Ga] IIC, [Ex ia Da] IIC, Ex ec ic [ia Ga] IIC T4 Gc

Ordering data

Description	Type	Order No.	Pcs./Pkt.
MACX MCR-EX-TC-I		1050233	1
MACX MCR-EX-TC-I-C		1052458	1

Accessories

IFS-USB-PROG-ADAPTER	2811271	1
IOA MCR-CJC-PT100	1085776	1

MACX Analog – Ex i signal conditioners with functional safety

Order key for MACX MCR-EX-TC-I-C temperature transducers (standard configuration entered as an example)

Order No.	SIL	Sensor type	Measuring unit	Cold junction compensation	Measuring range: Start	End	Output signal	Sliding mean value	Alarm signal, short circuit	Alarm signal, sensor break	Factory calibration certificate
1052458	/ ON /	K	C	ON	-50	150	OUT02	1	I000	I000	NONE
1052458 ≈ MACX MCR-EX-TC-I-C											
ON ≈ Active NONE ≈ Not active ON only with output range = OUT02											
See below											
Celsius [C] Ω [Ω] Millivolts [V]											
ON OFF											
See below											
0...20 mA [OUT01] 4...20 mA [OUT02] 0...5 mA [OUT15] 0...10 mA [OUT16] 1...5 mA [OUT25] 2...10 mA [OUT26]											
1 - 10											
0 mA [I000] 3.5 mA [I035] 21.5 mA [I215]											
0 mA [I000] 3.5 mA [I035] 21.5 mA [I215]											
YES ≈ With FCC (a fee is charged)											
YESPLUS ≈ FCC with 5 measuring points (a fee is charged)											
Smallest measuring range span											
Other setting options can be configured with the IFS-CONF software:											
- Freely configurable user characteristic curve with 30 support points											
- Output behavior in the event of a short circuit, sensor break or overrange/underrange can be freely configured or set in accordance with NE43 (standard configuration: NE43 upscale)											
- Filter setting (standard configuration: 1)											
- Restart after failsafe (standard configuration: ON)											
- Switching behavior: switching output (limit values, times, etc.) (standard configuration: OFF)											
Thermocouples (TC)											
A1G	≈ A-1 GOST 8.585-2001		°C		0		2,500		50k		
A2G	≈ A-2 GOST 8.585-2001		°C		0		1,800		50k		
A3G	≈ A-3 GOST 8.585-2001		°C		0		1,800		50k		
B	≈ B IEC584-1 (Pt30Rh-Pt6Rh)		°C		500		1,820		50k		
C	≈ C ASTM E988		°C		0		2,315		50k		
D	≈ DA ASTM E988(2002)		°C		0		2,315		50k		
E	≈ E IEC584-1 (NiCr-CuNi)		°C		-230		1,000		50k		
J	≈ J IEC584-1 (Fe-CuNi)		°C		-210		1,200		50k		
K	≈ K IEC584-1 (NiCr-Ni)		°C		-250		1,372		50k		
MG	≈ MG GOST 8.585-2001		°C		-200		100		50k		
N	≈ N IEC 584-1 (NiCrSi-NiSi)		°C		-200		1,300		50k		
R	≈ R IEC 584-1 (Pt13Rh-Pt)		°C		-50		1,768		50k		
S	≈ S IEC 584-1 (Pt10Rh-Pt)		°C		-50		1,768		50k		
T	≈ T IEC 584-1 (Cu-CuNi)		°C		-200		400		50k		
L	≈ L DIN 43760 (Fe-CuNi)		°C		-200		900		50k		
LG	≈ LG GOST 8.585-2001		°C		-200		800		50k		
U	≈ U DIN 43760 (Cu-CuNi)		°C		-200		600		50k		
V04	≈ Voltage -1,000 mV...+1,000 mV		mV		-1,000		1,000		10% of nominal span		
V05	≈ Voltage -500 mV...+500 mV		mV		-500		500				
V06	≈ Voltage -250 mV...+250 mV		mV		-250		250				
V07	≈ Voltage -125 mV...+125 mV		mV		-125		125				
V08	≈ Voltage -60 mV...+60 mV		mV		-60		60				
V09	≈ Voltage -30 mV...+30 mV		mV		-30		30				
V10	≈ Voltage -15 mV...+15 mV		mV		-15		150				

Temperature conversion guide for °C to °F:



$$T [^{\circ}\text{F}] = \frac{9}{5} T [^{\circ}\text{C}] + 32$$

MCR technology

MACX Analog – Ex i signal conditioners with functional safety

Temperature

Temperature transducers, Ex i

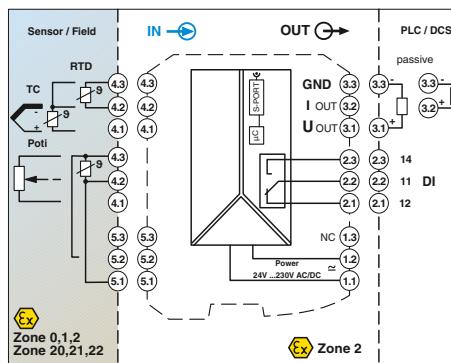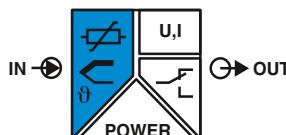

Temperature transducer, universal, with switching output, wide range supply

Functional Safety
Ex: Housing width 17.5 mm

Technical data

Input data

Resistance thermometers
Thermocouple sensors

Resistor

Potentiometer

Voltage

Output data

Output signal

Maximum output signal

Load R_B

Behavior in the event of a sensor error

Switching output

Contact type

Contact material

Max. switching voltage

Maximum switching current

General data

Supply voltage range

Power consumption

Temperature coefficient

Transmission error, total

Electrical isolation

Input/output/power supply

Input/output

Input/power supply

Input/switching output

Output/power supply

Ambient temperature range

Humidity

Inflammability class in accordance with UL 94

Housing material

Dimensions W/H/D

Screw connection rigid / flexible / AWG

Push-in connection rigid / flexible / AWG

Safety data as per ATEX

Maximum output voltage U_o

Maximum output current I_o

Maximum output power P_o

Conformance/approvals

Conformance

ATEX

IECEx

SIL in accordance with IEC 61508

Pt, Ni, Cu sensors: 2-, 3-, 4-conductor

B, E, J, K, N, R, S, T, L, U, CA, DA, A1G, A2G, A3G, MG, LG

0 Ω ... 50 kΩ

0 Ω ... 50 kΩ

-1,000 mV ... 1,000 mV

U output

4 mA ... 20 mA (in the case of SIL; further free configuration without SIL)

± 11 V

≥ 10 kΩ

In accordance with NE 43 or freely configurable

Switching output

1 PDT

AgSnO_2 , hard gold-plated

30 V AC (30 V DC)

0.5 A (30 V AC) / 1 A (30 V DC)

24 V ... 230 V AC/DC (-20%/+10%, 50/60 Hz)

< 1.5 W

0.01%/K

< 0.1% (e.g., for Pt 100, 300 K span, 4 ... 20 mA)

2.5 kV (50 Hz, 1 min., test voltage)

375 V (peak value in accordance with EN 60079-11)

375 V (peak value in accordance with EN 60079-11)

375 V (peak value in accordance with EN 60079-11)
300 V_{rms} (rated insulation voltage (overvoltage category II; degree of pollution 2, safe isolation as per EN 61010-1))

-20°C ... 65°C

Typically 5% ... 95% (non-condensing)

V0

PA 6.6-FR

17.5 / 99 / 114.5 mm

0.2 ... 2.5 mm² / 0.2 ... 2.5 mm² / 24 - 14

0.2 ... 1.5 mm² / 0.2 ... 1.5 mm² / 24 - 16

6 V

7.4 mA

11 mW

CE-compliant

II (1) G [Ex ia Ga] IIC

II (1) D [Ex ia Da] IIIC

II 3 G Ex nA nC ic IIC T4 Gc X

[Ex ia Ga] IIC, [Ex ia Da] IIIC, Ex nA nC ic IIC T4 Gc X

2

Ordering data

Description	Type	Order No.	Pcs./Pkt.
Temperature transducer, intrinsically safe input			
Standard configuration	Screw connection	MACX MCR-EX-T-UI-UP	2865654
Standard configuration	Push-in connection	MACX MCR-EX-T-UI-UP-SP	2924689
Order configuration	Screw connection	MACX MCR-EX-T-UI-UP-C	2811763
Order configuration	Push-in connection	MACX MCR-EX-T-UI-UP-SP-C	2924692

Accessories

Programming adapter for configuring modules with S-PORT interface	IFS-USB-PROG-ADAPTER	2811271	1
---	----------------------	---------	---

MACX Analog – Ex i signal conditioners with functional safety

Order key for MACX MCR-EX-T-UI-UP(-SP)-C temperature transducers (standard configuration entered as an example)

Order No.	Safety Integrity Level (SIL)	Sensor type	Connection technology	Cold junction compensation	Measuring range: Start	Measuring range: End	Measuring unit	Output range	Factory calibration certificate = FCC
2811763	ON	PT100	4	0 ≈ Off, e.g., with RTD, R, potentiometer, mV	-50	150	C ≈ °C F ≈ °F O ≈ Ω P ≈ % V ≈ mV	OUT02	NONE ≈ Without FCC
2811763 ≈ MACX MCR-EX-T-UI-UP-C	ON ≈ Active NONE ≈ Not active ON only with output range = OUT02	See below	2 ≈ 2-conductor 3 ≈ 3-conductor 4 ≈ 4-conductor	See below	See below			OUT15 ≈ 0 ... 5 mA OUT16 ≈ 0 ... 10 mA OUT01 ≈ 0 ... 20 mA OUT15 ≈ 0 ... 5 mA OUT25 ≈ 1 ... 5 mA OUT26 ≈ 2 ... 10 mA OUT02 ≈ 4 ... 20 mA OUT05 ≈ 0 ... 5 V OUT03 ≈ 0 ... 10 V OUT06 ≈ 1 ... 5 V OUT04 ≈ 2 ... 10 V OUT13 ≈ -5 ... +5 V OUT14 ≈ -10 ... +10 V Others can be freely configured in the software	YES ≈ With FCC (a fee is charged) YESPLUS ≈ FCC with 5 measuring points (a fee is charged)
2924692 ≈ MACX MCR-EX-T-UI-UP-SP-C							Smallest measuring range span	Other setting options can be configured with the IFS-CONF software:	
Resistance temperature detector (RTD)	PT50	≈ Pt 50 IEC60751		-200	850	°C	20k	- Freely configurable user characteristic curve with 30 support points - Output behavior in the event of a short circuit, sensor break or overrange/underrange can be freely configured or set in accordance with NE43 (standard configuration: NE43 upscale) - Filter setting (standard configuration: 1) - Restart after failsafe (standard configuration: ON) - Switching behavior: switching output (limit values, times, etc.) (standard configuration: OFF)	
	PT100	≈ Pt 100 IEC60751		-200	850	°C	20k		
	PT200	≈ Pt 200 IEC60751		-200	850	°C	20k		
	PT500	≈ Pt 500 IEC60751		-200	850	°C	20k		
	PT1000	≈ Pt 1000 IEC60751		-200	850	°C	20k		
	PT2000	≈ Pt 2000 IEC60751		-200	850	°C	20k		
	PT5000	≈ Pt 5000 IEC60751		-200	850	°C	20k		
	PT50S	≈ PT50 SAMA RC21-4-1966		-200	850	°C	20k		
	PT100S	≈ PT100 SAMA RC21-4-1966		-200	850	°C	20k		
	PT200S	≈ PT200 SAMA RC21-4-1966		-200	850	°C	20k		
	PT500S	≈ PT500 SAMA RC21-4-1966		-200	850	°C	20k		
	PT1000S	≈ PT1000 SAMA RC21-4-1966		-200	850	°C	20k		
	PT2000S	≈ PT2000 SAMA RC21-4-1966		-200	850	°C	20k		
	PT5000S	≈ PT5000 SAMA RC21-4-1966		-200	850	°C	20k		
	PT100G	≈ PT100 G GOST 6651-2009 (α=0.00391)		-200	850	°C	20k		
	PT200G	≈ PT200 G GOST 6651-2009 (α=0.00391)		-200	850	°C	20k		
	PT500G	≈ PT500 G GOST 6651-2009 (α=0.00391)		-200	850	°C	20k		
	PT1000G	≈ PT1000 G GOST 6651-2009 (α=0.00391)		-200	850	°C	20k		
	PT100J	≈ Pt 100 JIS C1604/1997		-200	850	°C	20k		
	PT200J	≈ Pt 200 JIS C1604/1997		-200	850	°C	20k		
	PT500J	≈ Pt 500 JIS C1604/1997		-200	850	°C	20k		
	PT1000J	≈ Pt 1000 JIS C1604/1997		-200	850	°C	20k		
	NI100	≈ NI100 DIN 43760		-60	250	°C	20k		
	NI200	≈ NI200 DIN 43760		-60	250	°C	20k		
	NI500	≈ NI500 DIN 43760		-60	250	°C	20k		
	NI1000	≈ NI1000 DIN 43760		-60	250	°C	20k		
	NI100S	≈ NI100 SAMA RC21-4-1966		-60	180	°C	20k		
	NI200S	≈ NI200 SAMA RC21-4-1966		-60	180	°C	20k		
	NI500S	≈ NI500 SAMA RC21-4-1966		-60	180	°C	20k		
	NI1000S	≈ NI1000 SAMA RC21-4-1966		-60	180	°C	20k		
	NI1000L	≈ NI1000 Landis&Gyr		-50	160	°C	20k		
	CU10	≈ CU10 SAMA RC21-4-1966		-70	500	°C	20k		
	CU50	≈ CU50 GOST 6651-2009 (α=0.00428)		-50	200	°C	20k		
	CU100	≈ CU100 GOST 6651-2009 (α=0.00428)		-50	200	°C	20k		
	CU53	≈ CU53 GOST 6651-2009 (α=0.00426)		-50	180	°C	20k		
	KTY81	≈ KTY81 KTY81-110 (Philips)		-55	150	°C	20k		
	KTY84	≈ KTY81 KTY84-130 (Philips)		-40	300	°C	20k		
Thermocouples (TC)	A1G	≈ A-1 GOST 8.585-2001		0	2,500	°C	50k		
	A2G	≈ A-2 GOST 8.585-2001		0	1,800	°C	50k		
	A3G	≈ A-3 GOST 8.585-2001		0	1,800	°C	50k		
	B	≈ B IEC584-1 (Pt30Rh-Pt6Rh)		500	1,820	°C	50k		
	C	≈ C ASTM E988		0	2,315	°C	50k		
	D	≈ DA ASTM E988(2002)		0	2,315	°C	50k		
	E	≈ E IEC584-1 (NiCr-CuNi)		-230	1,000	°C	50k		
	J	≈ J IEC584-1 (Fe-CuNi)		-210	1,200	°C	50k		
	K	≈ K IEC584-1 (NiCr-Ni)		-250	1,372	°C	50k		
	MG	≈ MG GOST 8.585-2001		-200	100	°C	50k		
	N	≈ N IEC 584-1 (NiCrSi-NiSi)		-200	1,300	°C	50k		
	R	≈ R IEC 584-1 (Pt13Rh-Pt)		-50	1,768	°C	50k		
	S	≈ S IEC 584-1 (Pt10Rh-Pt)		-50	1,768	°C	50k		
	T	≈ T IEC 584-1 (Cu-CuNi)		-200	400	°C	50k		
	L	≈ L DIN 43760 (Fe-CuNi)		-200	900	°C	50k		
	LG	≈ LG GOST 8.585-2001		-200	800	°C	50k		
	U	≈ U DIN 43760 (Cu-CuNi)		-200	600	°C	50k		
Remote resistance-type sensors (R) (2-, 3-, 4-conductor)	RES12	≈ Resistance 0...50,000 Ω For more values, visit www.phoenixcontact.com		0	50,000	Ω	10% of the selected measuring range		
Potentiometers (3-conductor)	POT12	≈ Potentiometer 0...50,000 Ω For more values, visit www.phoenixcontact.com		0	50,000	Ω	10% of the selected measuring range		
Voltage signals (mV)	V04	≈ Voltage -1,000 mV...+1,000 mV For more values, visit www.phoenixcontact.com		-1,000	1,000	mV	10% of nominal span		

Temperature conversion guide for °C to °F:

$$T [^{\circ}\text{F}] = \frac{9}{5} T [^{\circ}\text{C}] + 32$$



5

MCR technology

MACX Analog – Ex i signal conditioners with functional safety

Temperature

Temperature transducers, Ex i

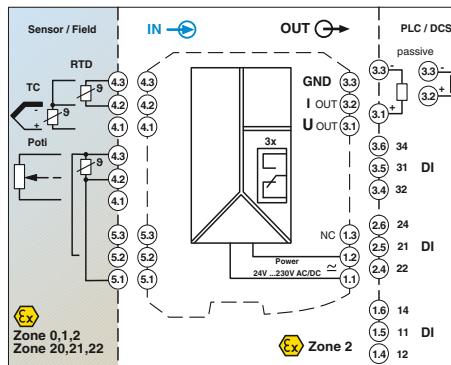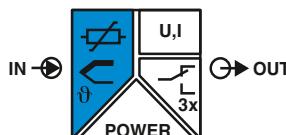

Temperature transducer, universal, with three limit value relays, wide range supply

Functional Safety
Ex: EAC Ex IEC 61508
Housing width 35 mm

Technical data

Input data

Resistance thermometers
Thermocouple sensors

Resistor

Potentiometer

Voltage

Output data

Output signal

Maximum output signal

Load R_B

Behavior in the event of a sensor error

Switching output

Contact type

Contact material

Max. switching voltage

Maximum switching current

General data

Supply voltage range

Power consumption

Temperature coefficient

Maximum transmission error

Electrical isolation

Input/output/power supply

Input/output

Input/power supply

Input/switching output

Output/power supply

Ambient temperature range

Humidity

Inflammability class in accordance with UL 94

Housing material

Dimensions W/H/D

Screw connection rigid / flexible / AWG

Push-in connection rigid / flexible / AWG

Safety data as per ATEX

Maximum output voltage U_o

Maximum output current I_o

Maximum output power P_o

Conformance/approvals

Conformance

ATEX

IECEx

SIL in accordance with IEC 61508

Pt, Ni, Cu sensors: 2-, 3-, 4-conductor

B, E, J, K, N, R, S, T, L, U, CA, DA, A1G, A2G, A3G, MG, LG

0 Ω ... 50 kΩ

0 Ω ... 50 kΩ

-1,000 mV ... 1,000 mV

U output

4 mA ... 20 mA (in the case of SIL; further free configuration without SIL)

±11 V

≥10 kΩ

In accordance with NE 43 or freely configurable

Relay output

3 PDTs

AgSnO₂, hard gold-plated

250 V AC (250 V DC)

2 A (250 V AC) / 2 A (28 V DC)

24 V ... 230 V AC/DC (-20%/+10%, 50/60 Hz)

<2.4 W

0.01 %/K

0.1% (e.g. for Pt 100, 300 K span, 4 ... 20 mA)

2.5 kV (50 Hz, 1 min., test voltage)

375 V (peak value in accordance with EN 60079-11)

375 V (peak value in accordance with EN 60079-11)

375 V (peak value in accordance with EN 60079-11)

300 V_{rms} (rated insulation voltage (overvoltage category II; degree of pollution 2, safe isolation as per EN 61010-1))

-20°C ... 65°C

Typically 5% ... 95% (non-condensing)

V0

PA 6.6-FR

35 / 99 / 114.5 mm

0.2 ... 2.5 mm² / 0.2 ... 2.5 mm² / 24 - 14

0.2 ... 1.5 mm² / 0.2 ... 1.5 mm² / 24 - 16

6 V

7.4 mA

11 mW

CE-compliant

Ex II (1) G [Ex ia Ga] IIC

Ex II (1) D [Ex ia Da] IIC

Ex III G Ex nA nC ic IIC T4 Gc X

[Ex ia Ga] IIC, [Ex ia Da] IIC, Ex nA nC ic IIC T4 Gc X

2

Ordering data

Description	Type	Order No.	Pcs./Pkt.
Temperature transducer, intrinsically safe input			
Standard configuration	Screw connection	MACX MCR-EX-T-UIREL-UP	2865751
Standard configuration	Push-in connection	MACX MCR-EX-T-UIREL-UP-SP	2924799
Order configuration	Screw connection	MACX MCR-EX-T-UIREL-UP-C	2865722
Order configuration	Push-in connection	MACX MCR-EX-T-UIREL-UP-SP-C	2924809

Accessories

Programming adapter for configuring modules with S-PORT interface	IFS-USB-PROG-ADAPTER	2811271	1
---	----------------------	---------	---

MACX Analog – Ex i signal conditioners with functional safety

Order key for MACX MCR-EX-T-UIREL-UP(-SP)-C temperature transducers (standard configuration entered as an example)

Order No.	SIL	Measuring unit	Sensor type	Connection technology	Measuring range: Start	Measuring range: End	Output signal	Switching function 1	Lower switching point 1	Upper switching point 1	Switching function 2	Lower switching point 2	Upper switching point 2	Factory calibration certificate
2865722	/ ON / C / PT100 / 4 / -50 / 150 / OUT02 / 0 / 99999 / 99999 / 0 / 99999 / 99999 / NONE	2865722 ≈ MACX MCR-EX-T-UIREL-UP-C	ON ≈ Active NONE ≈ Not active ON only with output range = OUT02	Celsius [C] Ω [Ω] Millivolts [V]	See below 2 ≈ 2-conductor 3 ≈ 3-conductor 4 ≈ 4-conductor	See below	0...20 mA [OUT01] 4...20 mA [OUT02] 0...10 V [OUT03] 2...10 V [OUT04] 0...5 V [OUT05] 1...5 V [OUT06] -5...+5 V [OUT13] -10...+10 V [OUT14] 0.5 mA [OUT15] 0...10 mA [OUT16] 1...5 mA [OUT25] 2...10 mA [OUT26]	L [0] H [1] L → SPH → H [2] H → SPH → L [3] L → SPH → H → SPL → L [4] H → SPH → L → SPL → H [5] L → SPL → H → SPH → L [6] H → SPL → L → SPH → H [7]	Free input, see web site for more	Free input, see web site for more		Free input, see web site for more	Free input, see web site for more	NONE ≈ Without FCC YES ≈ With FCC (a fee is charged) YESPLUS ≈ FCC with 5 measuring points (a fee is charged)
2924809	/ ON / C / PT100 / 4 / -50 / 150 / OUT02 / 0 / 99999 / 99999 / 0 / 99999 / 99999 / NONE	2924809 ≈ MACX MCR-EX-T-UIREL-UP-SP-C												
Resistance temperature detector (RTD)	°C	PT50	≈ Pt 50 IEC60751		-200		850		Smallest measuring range span					Other setting options can be configured with the IFS-CONF software:
	°C	PT100	≈ Pt 100 IEC60751		-200		850		20k					- Freely configurable user characteristic curve with 30 support points
	°C	PT200	≈ Pt 200 IEC60751		-200		850		20k					- Output behavior in the event of a short circuit, sensor break or overrange/underrange can be freely configured or set in accordance with NE43 (standard configuration: NE43 upscale)
	°C	PT500	≈ Pt 500 IEC60751		-200		850		20k					- Filter setting (standard configuration: 1)
	°C	PT1000	≈ Pt 1000 IEC60751		-200		850		20k					- Restart after failsafe (standard configuration: ON)
	°C	PT2000	≈ Pt 2000 IEC60751		-200		850		20k					- Switching behavior: switching output (limit values, times, etc.) (standard configuration: OFF)
	°C	PT5000	≈ Pt 5000 IEC60751		-200		850		20k					
	°C	PT50S	≈ PT50 SAMA RC21-4-1966		-200		850		20k					
	°C	PT100S	≈ PT100 SAMA RC21-4-1966		-200		850		20k					
	°C	PT200S	≈ PT200 SAMA RC21-4-1966		-200		850		20k					
	°C	PT500S	≈ PT500 SAMA RC21-4-1966		-200		850		20k					
	°C	PT1000S	≈ PT1000 SAMA RC21-4-1966		-200		850		20k					
	°C	PT2000S	≈ PT2000 SAMA RC21-4-1966		-200		850		20k					
	°C	PT5000S	≈ PT5000 SAMA RC21-4-1966		-200		850		20k					
	°C	PT100G	≈ PT100 G GOST 6651-2009 (a=0,00391)		-200		850		20k					
	°C	PT200G	≈ PT200 G GOST 6651-2009 (a=0,00391)		-200		850		20k					
	°C	PT500G	≈ PT500 G GOST 6651-2009 (a=0,00391)		-200		850		20k					
	°C	PT1000G	≈ PT1000 G GOST 6651-2009 (a=0,00391)		-200		850		20k					
	°C	PT100J	≈ Pt 100 JIS C1604/1997		-200		850		20k					
	°C	PT200J	≈ Pt 200 JIS C1604/1997		-200		850		20k					
	°C	PT500J	≈ Pt 500 JIS C1604/1997		-200		850		20k					
	°C	PT1000J	≈ Pt 1000 JIS C1604/1997		-200		850		20k					
	°C	NI100	≈ NI100 DIN 43760		-60		250		20k					
	°C	NI200	≈ NI200 DIN 43760		-60		250		20k					
	°C	NI500	≈ NI500 DIN 43760		-60		250		20k					
	°C	NI1000	≈ NI1000 DIN 43760		-60		250		20k					
	°C	NI100S	≈ NI100 SAMA RC21-4-1966		-60		180		20k					
	°C	NI200S	≈ NI200 SAMA RC21-4-1966		-60		180		20k					
	°C	NI500S	≈ NI500 SAMA RC21-4-1966		-60		180		20k					
	°C	NI1000S	≈ NI1000 SAMA RC21-4-1966		-60		180		20k					
	°C	NI1000L	≈ NI1000 Landis&Gyr		-50		160		20k					
	°C	CU10	≈ CU10 SAMA RC21-4-1966		-70		500		20k					
	°C	CU50	≈ CU 50 GOST 6651-2009 (a=0,00428)		-50		200		20k					
	°C	CU100	≈ CU 100 GOST 6651-2009 (a=0,00428)		-50		200		20k					
	°C	CU53	≈ CU 53 GOST 6651-2009 (a=0,00428)		-50		180		20k					
	°C	KTY81	≈ KTY81 KTY81-110 (Philips)		-55		150		20k					
	°C	KTY84	≈ KTY81 KTY84-130 (Philips)		-40		300		20k					
Thermocouples (TC)	°C	A1G	≈ A-1 GOST 8.585-2001		0		2,500		50k					
	°C	A2G	≈ A-2 GOST 8.585-2001		0		1,800		50k					
	°C	A3G	≈ A-3 GOST 8.585-2001		0		1,800		50k					
	°C	B	≈ B IEC584-1 (Pt130Rh-Pt6Rh)		500		1,820		50k					
	°C	C	≈ C ASTM E988		0		2,315		50k					
	°C	D	≈ DA ASTM E988(2002)		0		2,315		50k					
	°C	E	≈ E IEC584-1 (NiCr-CuNi)		-230		1,000		50k					
	°C	J	≈ J IEC584-1 (Fe-CuNi)		-210		1,200		50k					
	°C	K	≈ K IEC584-1 (NiCr-Ni)		-250		1,372		50k					
	°C	MG	≈ MG GOST 8.585-2001		-200		100		50k					
	°C	N	≈ N IEC 584-1 (NiCrSi-NiSi)		-200		1,300		50k					
	°C	R	≈ R IEC 584-1 (Pt13Rh-Pt)		-50		1,768		50k					
	°C	S	≈ S IEC 584-1 (Pt10Rh-Pt)		-50		1,768		50k					
	°C	T	≈ T IEC 584-1 (Cu-CuNi)		-200		400		50k					
	°C	L	≈ L DIN 43760 (Fe-CuNi)		-200		900		50k					
	°C	LG	≈ LG GOST 8.585-2001		-200		800		50k					
	°C	U	≈ U DIN 43760 (Cu-CuNi)		-200		600		50k					
Remote resistance-type sensors (R) (2-, 3-, 4-conductor)	Ω	RES12	≈ Resistance 0...50,000 Ω For more values, visit www.phoenixcontact.com		0		50,000		10% of the selected measuring range					
Potentiometers (3-conductor)	Ω	POT12	≈ Potentiometer 0...50,000 Ω For more values, visit www.phoenixcontact.com		0		50,000		10% of the selected measuring range					
Voltage signals (mV)	mV	V04	≈ Voltage -1,000 mV...+1,000 mV For more values, visit www.phoenixcontact.com		-1,000		1,000		10% of nominal span					



Temperature conversion guide for °C to °F:

$$T [^{\circ}\text{F}] = \frac{9}{5} T [^{\circ}\text{C}] + 32$$

MACX Analog – Ex i signal conditioners with functional safety

Digital IN

NAMUR signal conditioners, Ex i

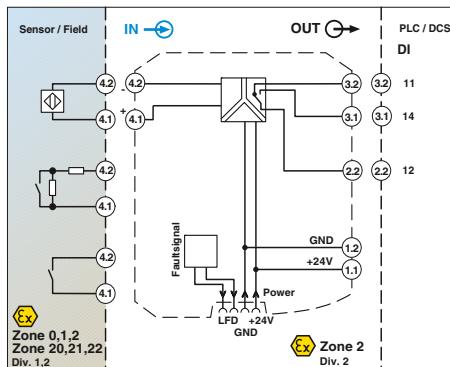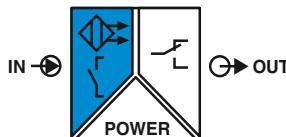

SIL
IEC 61508



**NAMUR signal conditioner,
signal output: PDT relay**

DNV GL Functional Safety

Ex: EAC Ex IECEx KC-s

Housing width 12.5 mm

Technical data

Input data

Input signal

No-load voltage

Switching points

Switching hysteresis

Line error detection

Switching output

Contact type

Contact material

Max. switching voltage

Maximum switching capacity

Recommended minimum load

Mechanical service life

Switching behavior

Maximum switching frequency

General data

Supply voltage range

Current consumption

Power dissipation

Number of channels

Electrical isolation

Input/output
Input/output/supply, DIN rail connector

NAMUR proximity sensors (IEC/EN 60947-5-6)

Floating switch contacts

Switch contacts with resistance circuit

~ 8 V DC

>2.1 mA (conductive) / <1.2 mA (blocking)

<0.2 mA

Break 0.05 mA <IN <0.35 mA

Short circuit 100 Ω <RSensor <360 Ω

Relay output

1 PDT

AgSnO₂, hard gold-plated

250 V AC (2 A) / 120 V DC (0.2 A) / 30 V DC (2 A)

500 VA

5 V / 10 mA

10⁷ cycles

Can be inverted via slide switch

≤20 Hz (without load)

19.2 V DC ... 30 V DC (24 V DC -20%...+25%)

21 mA (24 V DC)

<650 mW

1

375 V (peak value in accordance with EN 60079-11)

300 V_{rms} (rated insulation voltage (overvoltage category II); degree of pollution 2, safe isolation as per EN 61010-1); 2.5 kV (50 Hz, 1 min., test voltage)

300 V_{rms} (rated insulation voltage (overvoltage category III); degree of pollution 2, safe isolation as per EN 61010-1); 2.5 kV (50 Hz, 1 min., test voltage)

-20°C ... 60°C (any mounting position)

10% ... 95% (non-condensing)

Green LED (supply voltage)

LED yellow (switching state)

Red LED (line errors)

V0

12.5 / 99 / 114.5 mm

0.2 ... 2.5 mm² / 0.2 ... 2.5 mm² / 24 - 14

0.2 ... 1.5 mm² / 0.2 ... 1.5 mm² / 24 - 16

9.6 V

10 mA

25 mW

253 V AC (125 V DC)

CE-compliant, additionally EN 61326

Ex II (1) G [Ex ia Ga] IIC

Ex II (1) D [Ex ia Da] IIIC

Ex III (1) G Ex nA nC [ia Ga] IIC T4 Gc

[Ex ia Ga] IIC, [Ex ia Da] IIIC, Ex nA nC [ia Ga] IIC T4 Gc

Class I Div 2; IS for Class I, II, III Div 1



UL 61010 Listed

2

Ordering data

Description	Type	Order No.	Pcs./Pkt.
NAMUR signal conditioner, 1-channel, input intrinsically safe, output: PDT contact	Screw connection Push-in connection	MACX MCR-EX-SL-NAM-R MACX MCR-EX-SL-NAM-R-SP	2865434 2924045
			1 1

Digital IN NAMUR signal conditioners, Ex i

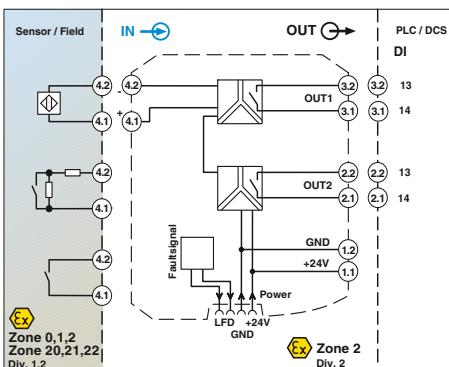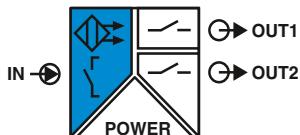

SIL
IEC 61508



NAMUR signal conditioner:
2 signal outputs: N/O relay

IEC 61508 DNV GL Functional Safety

Ex: EAC Ex KC-S

Housing width 12.5 mm

Technical data

Input data	NAMUR proximity sensors (EN 60947-5-6) No-load voltage Switching points Switching hysteresis Line error detection	Floating switch contacts Switch contacts with resistance circuit ~ 8 V DC >2.1 mA (conductive) / <1.2 mA (blocking) <0.2 mA Break 0.05 mA <IIN <0.35 mA Short circuit 100 Ω <RSensor <360 Ω
Switching output	Contact type Contact material Max. switching voltage Maximum switching capacity Recommended minimum load Mechanical service life Switching behavior Maximum switching frequency	Relay output 2 N/O contacts AgSnO ₂ , hard gold-plated 250 V AC (2 A) / 120 V DC (0.2 A) / 30 V DC (2 A) 500 VA 5 V / 10 mA 10 ⁷ cycles Can be inverted via slide switch ≤20 Hz (without load)
General data	Supply voltage range Current consumption Power dissipation Electrical isolation	19.2 V DC ... 30 V DC (24 V DC -20%...+25%) 30 mA (24 V DC) <950 mW
Input/output	Input/supply, DIN rail connector	375 V (peak value in accordance with EN 60079-11) 375 V (peak value in accordance with EN 60079-11) 300 V _{rms} (rated insulation voltage (overvoltage category III); degree of pollution 2, safe isolation as per EN 61010-1))
Output 1/output 2/input, power supply, DIN rail connector		300 V _{rms} (rated insulation voltage (overvoltage category III); degree of pollution 2, safe isolation as per EN 61010-1))
Output 1/output 2/input/power supply, DIN rail connector		2.5 kV (50 Hz, 1 min., test voltage)
Ambient temperature range Humidity Status indication	-20°C ... 60°C (any mounting position) 10% ... 95% (non-condensing) Green LED (supply voltage) LED yellow (switching state) Red LED (line errors)	-20°C ... 60°C (any mounting position) 10% ... 95% (non-condensing) Green LED (supply voltage) LED yellow (switching state) Red LED (line errors)
Inflammability class in accordance with UL 94 Dimensions W/H/D Screw connection rigid / flexible / AWG Push-in connection rigid / flexible / AWG	V0 12.5 / 99 / 114.5 mm 0.2 ... 2.5 mm ² / 0.2 ... 2.5 mm ² / 24 - 14 0.2 ... 1.5 mm ² / 0.2 ... 1.5 mm ² / 24 - 16	V0 12.5 / 99 / 114.5 mm 0.2 ... 2.5 mm ² / 0.2 ... 2.5 mm ² / 24 - 14 0.2 ... 1.5 mm ² / 0.2 ... 1.5 mm ² / 24 - 16
Safety data as per ATEX Maximum output voltage U _o Maximum output current I _o Maximum output power P _o Maximum voltage U _m	9.6 V 10 mA 25 mW 253 V AC (125 V DC)	9.6 V 10 mA 25 mW 253 V AC (125 V DC)
Conformance/approvals ATEX	CE-compliant, additionally EN 61326 II (1) G [Ex ia Ga] IIC II (1) D [Ex ia Da] IIC II 3 (1) G Ex nA nC [ia Ga] IIC T4 Gc [Ex ia Ga] IIC, [Ex ia Da] IIC, Ex nA nC [ia Ga] IIC T4 Gc Class I Div 2; IS for Class I, II, III Div 1 UL 61010 Listed	CE-compliant, additionally EN 61326 II (1) G [Ex ia Ga] IIC II (1) D [Ex ia Da] IIC II 3 (1) G Ex nA nC [ia Ga] IIC T4 Gc [Ex ia Ga] IIC, [Ex ia Da] IIC, Ex nA nC [ia Ga] IIC T4 Gc Class I Div 2; IS for Class I, II, III Div 1 UL 61010 Listed
IECEx UL, USA/Canada		
SIL in accordance with IEC 61508	2	



Ordering data

Description	Type	Order No.	Pcs./Pkt.
NAMUR signal conditioner, 1-channel, input intrinsically safe, output: 2 N/O contacts	Screw connection Push-in connection	MACX MCR-EX-SL-NAM-2RO MACX MCR-EX-SL-NAM-2RO-SP	2865450 2924061
			1 1

MACX Analog – Ex i signal conditioners with functional safety

Digital IN

NAMUR signal conditioners, Ex i

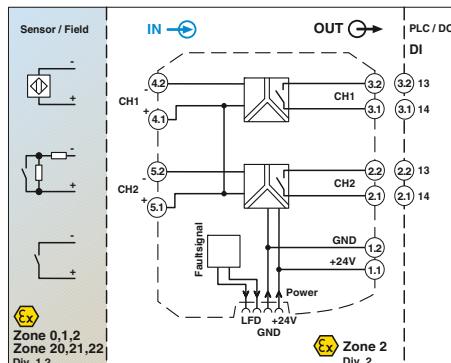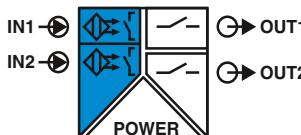

NAMUR signal conditioner, 2-channel, signal output: N/O relay

DNV GL Functional Safety

Ex: EAC Ex IECEx KC-s

Housing width 12.5 mm



Technical data

Input data	
Input signal	
No-load voltage	NAMUR proximity sensors (IEC/EN 60947-5-6)
Switching points	Floating switch contacts
Switching hysteresis	Switch contacts with resistance circuit
Line error detection	~ 8 V DC
Switching output	>2.1 mA (conductive) / <1.2 mA (blocking)
Contact type	<0.2 mA
Contact material	Break 0.05 mA <IN <0.35 mA
Max. switching voltage	Short circuit 100 Ω <RSensor <360 Ω
Maximum switching capacity	Relay output
Recommended minimum load	1 N/O contact per channel
Mechanical service life	AgSnO ₂ , hard gold-plated
Switching behavior	250 V AC (2 A) / 120 V DC (0.2 A) / 30 V DC (2 A)
Maximum switching frequency	500 VA
General data	5 V / 10 mA
Supply voltage range	10 ⁷ cycles
Current consumption	Can be inverted via slide switch
Power dissipation	≤20 Hz (without load)
Electrical isolation	
	19.2 V DC ... 30 V DC (24 V DC -20%...+25%)
	35 mA (24 V DC)
	<1 W
	Input/output
	Input/supply, DIN rail connector
Ambient temperature range	375 V (peak value in accordance with EN 60079-11)
Humidity	375 V (peak value in accordance with EN 60079-11)
Status indication	300 V _{rms} (rated insulation voltage (overvoltage category II); degree of pollution 2, safe isolation as per EN 61010-1))
Inflammability class in accordance with UL 94	
Dimensions W/H/D	300 V _{rms} (rated insulation voltage (overvoltage category III); degree of pollution 2, safe isolation as per EN 61010-1))
Screw connection rigid / flexible / AWG	
Push-in connection rigid / flexible / AWG	2.5 kV (50 Hz, 1 min., test voltage)
Safety data as per ATEX	-20°C ... 60°C (any mounting position)
Maximum output voltage U _o	5% ... 95% (non-condensing)
Maximum output current I _o	Green LED (supply voltage)
Maximum output power P _o	LED yellow (switching state)
Maximum voltage U _m	Red LED (line errors)
Conformance/approvals	V0
Conformance	12.5 / 99 / 114.5 mm
ATEX	0.2 ... 2.5 mm ² / 0.2 ... 2.5 mm ² / 24 - 14
	0.2 ... 1.5 mm ² / 0.2 ... 1.5 mm ² / 24 - 16
IECEx	
UL, USA/Canada	9.6 V
SIL in accordance with IEC 61508	10 mA
	25 mW
	253 V AC (125 V DC)
	CE-compliant, additionally EN 61326
	Ex II 1 G [Ex ia Ga] IIC
	Ex II 1 D [Ex ia Da] IIIC
	Ex III 1 G Ex nA nC [ia Ga] IIC T4 Gc
	[Ex ia Ga] IIC, [Ex ia Da] IIIC, Ex nA nC [ia Ga] IIC T4 Gc
	Class I Div 2; IS for Class I, II, III Div 1
	UL 61010 Listed
	2

Ordering data

Description	Type	Order No.	Pcs./Pkt.
NAMUR signal conditioner, 2-channel, input intrinsically safe, output: N/O contact	Screw connection Push-in connection	MACX MCR-EX-SL-2NAM-RO MACX MCR-EX-SL-2NAM-RO-SP	2865476 2924087
			1 1

Digital IN NAMUR signal conditioners, Ex i

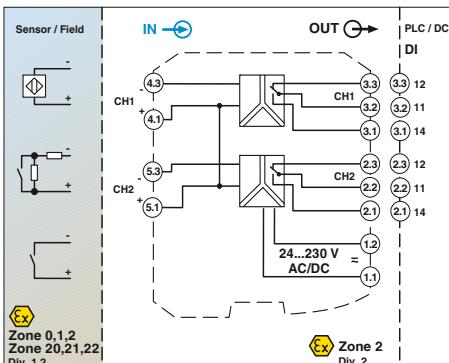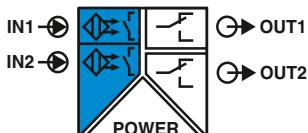

NAMUR signal conditioner, 2-channel, signal output: PDT relay, wide range supply

IEC Functional Safety

Ex: EAC Ex IEC

Housing width 17.5 mm

Technical data

Input data	NAMUR proximity sensors (EN 60947-5-6) Open circuit switch contacts Switch contacts with resistance circuit ~ 8 V DC >2.1 mA (conductive) / <1.2 mA (blocking) <0.2 A Break 0.05 mA <IIN <0.35 mA Short circuit 100 Ω <RSensor <360 Ω
Input signal	No-load voltage Switching points Switching hysteresis Line error detection
Switching output	Contact type Contact material Max. switching voltage Maximum switching capacity Recommended minimum load Mechanical service life Switching behavior Maximum switching frequency
General data	Supply voltage range Current consumption Power dissipation Electrical isolation
Input/output	Input/power supply
Output 1/output 2/input, power supply	375 V (peak value in accordance with EN 60079-11) 375 V (peak value in accordance with EN 60079-11) 300 V _{rms} (rated insulation voltage (overvoltage category II); degree of pollution 2, safe isolation as per EN 61010-1)) 2.5 kV AC (50 Hz, 1 min., test voltage)
Ambient temperature range	-35°C ... 70°C
Humidity	10% ... 95% (non-condensing)
Inflammability class in accordance with UL 94	V0
Housing material	PA 6.6-FR
Dimensions W/H/D	17.5 / 99 / 114.5 mm
Screw connection rigid / flexible / AWG	0.2 ... 2.5 mm ² / 0.2 ... 2.5 mm ² / 24 - 14
Push-in connection rigid / flexible / AWG	0.2 ... 1.5 mm ² / 0.2 ... 1.5 mm ² / 24 - 16
Safety data as per ATEX	9.56 V 10.3 mA 25 mW
Maximum output voltage U _o	253 V AC/DC (supply terminals)
Maximum output current I _o	250 V AC (output terminals)
Maximum output power P _o	120 V DC (output terminals)
Maximum voltage U _m	CE-compliant, additionally EN 61326
Conformance	II (1) G [Ex ia Ga] IIC
ATEX	II (1) D [Ex ia Da] IIC
IECEx	II 3(1) G Ex nA nC [ia Ga] IIC T4 Gc X
UL, USA/Canada	[Ex ia Ga] IIC, [Ex ia Da] IIC, Ex nA nC [ia Ga] IIC T4 Gc
SIL in accordance with IEC 61508	Class I Div 2; IS for Class I, II, III Div 1
	2



Ordering data

Type	Order No.	Pcs./Pkt.
Screw connection	MACX MCR-EX-SL-2NAM-R-UP	2865984
Push-in connection	MACX MCR-EX-SL-2NAM-R-UP-SP	2924249

MACX Analog – Ex i signal conditioners with functional safety

Digital IN

NAMUR signal conditioners, Ex i

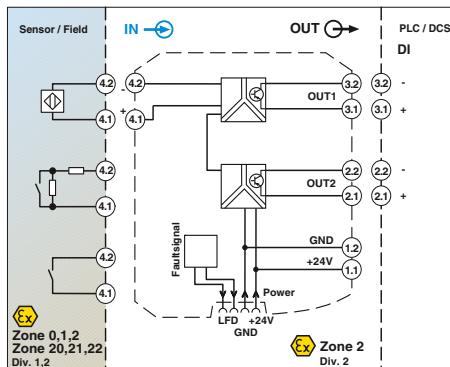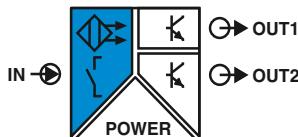

SIL
IEC 61508



NAMUR signal conditioner:
2 signal outputs: transistor (passive)

DNV GL Functional Safety

Ex: EAC Ex IECEx

Housing width 12.5 mm

Technical data

Input data

Input signal

No-load voltage

Switching points

Line error detection

Switching output

Max. switching voltage

Maximum switching current

Drop (ΔU)

Switching behavior

Maximum switching frequency

General data

Supply voltage range

Current consumption

Power dissipation

Number of channels

Electrical isolation

Input/output
Input/output/supply, DIN rail connector

NAMUR proximity sensors (EN 60947-5-6)

Floating switch contacts

Switch contacts with resistance circuit

~ 8 V DC

>2.1 mA (conductive) / <1.2 mA (blocking)

Break 0.05 mA <I_{IN} <0.35 mA

Short circuit 100 Ω <R_{Sensor} <360 Ω

2 transistor outputs, passive

30 V DC

50 mA (short-circuit-proof)

<1.4 V

Can be inverted using DIP switch

≤5 kHz

19.2 V DC ... 30 V DC (24 V DC -20%...+25%)

<28 mA (24 V DC)

≤800 mW

1

375 V (peak value in accordance with EN 60079-11)

300 V_{rms} (rated insulation voltage (overvoltage category II; degree of pollution 2, safe isolation as per EN 61010-1))

2.5 kV (50 Hz, 1 min., test voltage)

375 V (peak value in accordance with EN 60079-11)

50 V_{rms} (rated insulation voltage (overvoltage category II; degree of pollution 2, basic insulation as per EN 61010-1))

1 kV (50 Hz, 1 min., test voltage)

-20°C ... 60°C (any mounting position)

10% ... 95% (non-condensing)

Green LED (supply voltage)

LED yellow (switching state)

Red LED (line errors)

V0

PA 6.6 FR

12.5 / 99 / 114.5 mm

0.2 ... 2.5 mm² / 0.2 ... 2.5 mm² / 24 - 14

0.2 ... 1.5 mm² / 0.2 ... 1.5 mm² / 24 - 16

9.6 V

10 mA

25 mW

253 V AC (125 V DC)

CE-compliant, additionally EN 61326

Ex II (1) G [Ex ia Ga] IIC

Ex II (1) D [Ex ia Da] IIC

Ex II 3 (1) G Ex nA [ia Ga] IIC T4 Gc

[Ex ia Ga] IIC, [Ex ia Da] IIC, Ex nA [ia Ga] IIC T4 Gc

Class I Div 2; IS for Class I, II, III Div 1

2

Ordering data

Description

NAMUR signal conditioner, input intrinsically safe, output:
Transistor, passive

Type



Screw connection
Push-in connection

MACX MCR-EX-SL-NAM-2T
MACX MCR-EX-SL-NAM-2T-SP

2865463
2924074

1
1

Digital IN NAMUR signal conditioners, Ex i

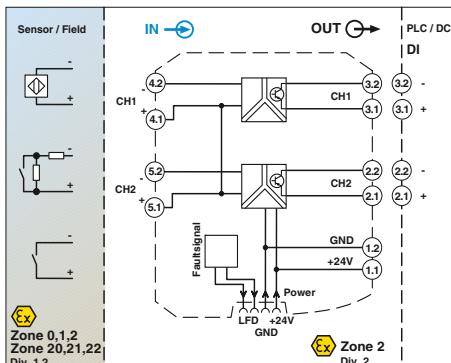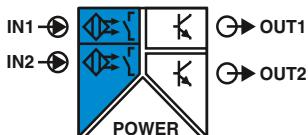

SIL
IEC 61508



NAMUR signal conditioner, 2-channel,
signal output: transistor (passive)

DNV GL Functional Safety

Ex: EAC Ex IECEx ATEX

Housing width 12.5 mm

Technical data

Input data	NAMUR proximity sensors (EN 60947-5-6) Switching points Line error detection	No-load voltage Switching output Max. switching voltage Maximum switching current Drop (ΔU) Switching behavior Maximum switching frequency	General data Supply voltage range Current consumption Power dissipation Number of channels Electrical isolation	Input/output Input/output/supply, DIN rail connector	375 V (peak value in accordance with EN 60079-11) 30 V V_{rms} (rated insulation voltage (overvoltage category II); degree of pollution 2, safe isolation as per EN 61010-1)) 2.5 kV (50 Hz, 1 min., test voltage)
				Input/supply, DIN rail connector Output 1/output 2	375 V (peak value in accordance with EN 60079-11) 50 V V_{rms} (rated insulation voltage (overvoltage category II); degree of pollution 2, basic insulation as per EN 61010-1)) 1 kV (50 Hz, 1 min., test voltage)
	Ambient temperature range Humidity Status indication	Inflammability class in accordance with UL 94 Housing material Dimensions W/H/D Screw connection rigid / flexible / AWG Push-in connection rigid / flexible / AWG	Safety data as per ATEX Maximum output voltage U_o Maximum output current I_o Maximum output power P_o Maximum voltage U_m	Input/output Input/output/supply, DIN rail connector	-20°C ... 60°C (any mounting position) 10% ... 95% (non-condensing) Green LED (supply voltage) LED yellow (switching state) Red LED (line errors) V0 PA 6.6-FR 12.5 / 99 / 114.5 mm 0.2 ... 2.5 mm ² / 0.2 ... 2.5 mm ² / 24 - 14 0.2 ... 1.5 mm ² / 0.2 ... 1.5 mm ² / 24 - 16
Notes:	Information about the supply and error evaluation module as well as about the DIN rail connectors and marking material can be found from page 175	Conformance/approvals Conformance ATEX			9.6 V 10 mA 25 mW 253 V AC (125 V DC)
	Information about resistance circuits is given on page 177				CE-compliant, additionally EN 61326 Ex II (1) G [Ex ia Ga] IIC Ex II (1) D [Ex ia Da] IIIC Ex II 3 (1) G Ex nA [ia Ga] IIC T4 Gc [Ex ia Ga] IIC, [Ex ia Da] IIIC, Ex nA [ia Ga] IIC T4 Gc Class I Div 2; IS for Class I, II, III Div 1
	Information on "Plug and play" connection using system cabling can be found from page 170				2

Ordering data



Description	Type	Order No.	Pcs./Pkt.
NAMUR signal conditioner, 2-channel, input intrinsically safe, output: Transistor, passive	Screw connection Push-in connection	MACX MCR-EX-SL-2NAM-T MACX MCR-EX-SL-2NAM-T-SP	2865489 2924090
			1 1

MCR technology

MACX Analog – Ex i signal conditioners with functional safety

Digital IN

NAMUR signal conditioners, Ex i

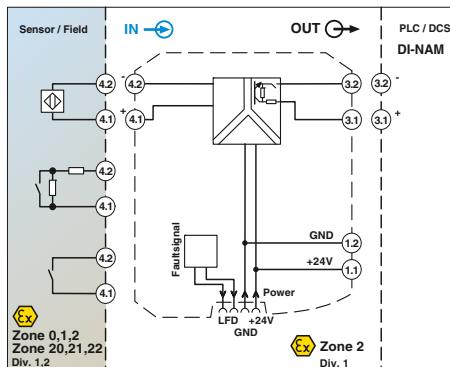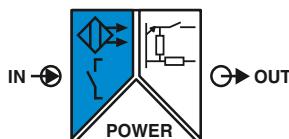

SIL
IEC 61508



NAMUR signal conditioner, with line fault transparency

Functional Safety
Ex: EAC Ex IECEx IMA
Housing width 12.5 mm

NAMUR signal conditioners for the intrinsically safe operation of proximity sensors or mechanical contacts installed in the Ex area.

- Input for NAMUR proximity sensors (EN 60947-5-6), floating contacts or contacts with resistance circuit, [Ex ia]
- Signal output with resistive behavior (transistor)
- Signal output with line fault transparency: line error message directly via output to PLC or PCS. The output responds in accordance with EN 60947-5-6
- Up to 5 kHz
- Direction of operation can be selected
- Line fault detection can be activated and deactivated
- Power supply and error indication possible via the DIN rail connector
- LED indicators for supply voltage, status, and fault in accordance with NAMUR NE 44
- Plug-in screw or Push-in connection technology
- Safe 3-way electrical isolation
- Up to SIL 2 in accordance with IEC 61508
- Installation in zone 2 permitted

Notes:

Information on the supply and error evaluation module, DIN rail connectors, system cabling, and marking material can be found from page 175

Information about resistance circuits is given on page 177

Input data

Input signal

No-load voltage
Switching points
Line error detection

Switching output

Switching voltage
Switching frequency
Impedance 0-signal
Impedance 1-signal
Impedance fault
Switching behavior

General data

Supply voltage range

Current draw
Power dissipation
Electrical isolation

Input/output

Input/output/supply, DIN rail connector

Ambient temperature range

Humidity

Status indication

Inflammability class in accordance with UL 94

Housing material
Dimensions W/H/D
Screw connection rigid / flexible / AWG
Push-in connection rigid / flexible / AWG

Safety data as per ATEX

Maximum output voltage U_o
Maximum output current I_o
Maximum output power P_o
Maximum voltage U_m

Conformance/approvals

Conformance

ATEX

IECEx

SIL in accordance with IEC 61508

NAMUR proximity sensors (EN 60947-5-6)

Open circuit switch contacts

Switch contacts with resistance circuit

8 V DC ±10%

>2.1 mA (conductive) / <1.2 mA (blocking)

Break 0.05 mA <I_{IN} <0.35 mA

Short circuit 100 Ω <R_{Sensor} <360 Ω

Resistive (transistor, passive)

8.2 V DC ±10% (in accordance with EN 60947-5-6)

≤5 kHz (ohmic load)

11 kΩ ±5%

1.4 kΩ ±5%

>100 kΩ

Can be inverted using DIP switch

9.6 V DC ... 30 V DC (12 V DC ... 24 V DC (-20% ... +25%))

25 mA (24 V DC)

<0.6 W

375 V (peak value in accordance with EN 60079-11)

300 V_{ms} (rated insulation voltage (overvoltage category II); degree of pollution 2, safe isolation as per EN 61010-1))

2.5 kV (50 Hz, 1 min., test voltage)

375 V (peak value in accordance with EN 60079-11)

-20°C ... 60°C (any mounting position)

10% ... 95% (non-condensing)

Green LED (supply voltage)

LED yellow (switching state)

Red LED (line errors)

V0

PA 6.6-FR

12.5 / 99 / 114.5 mm

0.2 ... 2.5 mm² / 0.2 ... 2.5 mm² / 24 - 14

0.2 ... 1.5 mm² / 0.2 ... 1.5 mm² / 24 - 16

9.6 V

10 mA

25 mW

253 V AC/DC

CE-compliant, additionally EN 61326

Ex II (1) G [Ex ia Ga] IIC

Ex II (1) D [Ex ia Da] IIC

Ex II 3G Ex nA IIC T4 Gc X

[Ex ia Ga] IIC, [Ex ia Da] IIC, Ex nA IIC T4 Gc

2

Ordering data

Description	Type	Order No.	Pcs./Pkt.
NAMUR signal conditioner, intrinsically safe input, output with line fault transparency	Screw connection Push-in connection	MACX MCR-EX-SL-NAM-NAM MACX MCR-EX-SL-NAM-NAM-SP	2866006 2924883
Specifically for Yokogawa systems	Screw connection Push-in connection	MACX MCR-EX-SL-NAM-YO MACX MCR-EX-SL-NAM-YO-SP	2905723 2905724
Specifically for Honeywell systems	Screw connection Push-in connection	MACX MCR-EX-SL-NAM-HO MACX MCR-EX-SL-NAM-HO-SP	2907404 2907405

MACX Analog – Ex i signal conditioners with functional safety

Solenoid drivers for controlling solenoid valves

In order to control intrinsically safe Ex i solenoid valves, you have to have an intrinsically safe control circuit. This is provided by the solenoid drivers that are available from Phoenix Contact.

The following must be taken into account when dimensioning your intrinsically safe control circuit:

- Valve
- Cable with corresponding resistance
- Solenoid driver


As a result, it may be the case that not all valves are compatible with the solenoid drivers.

Below is an extract from a table showing possible combinations of valves and solenoid drivers.

A complete and updated list (along with details of the technical data of suitable valves, the maximum cable lengths, and the maximum cable resistances of the individual combinations) can be found on the Internet at:

phoenixcontact.net/products


Example circuit

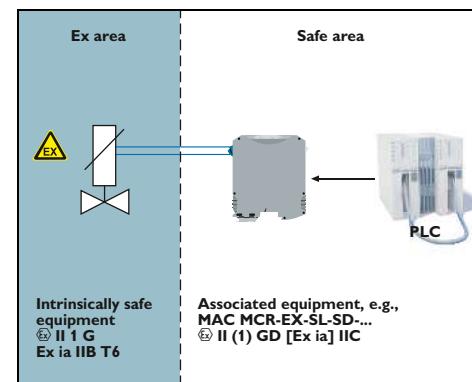

Valves overview

Manufacturer	Type Description		Ex certificate	Condition	MACX Analog Ex solenoid drivers			
					MACX MCR-EX-SL-SD-21-25-LP	MACX MCR-EX-SL-SD-21-40-LP	MACX MCR-EX-SL-SD-24-48-LP	MACX MCR-EX-SL-SD-21-60-LP
ASCO	Coil	195	LCIE 08 ATEX 6083			✓	✓	✓
	Coil	302 (12 V)	INERIS 03 ATEX 0249X				✓	✓
	Coil	302 (24 V)	INERIS 03 ATEX 0249X					✓
Bürkert	Coil	AC 10, standard	PTB 01 ATEX 2101			✓	✓	
	Coil	AC 10, high-resistance	PTB 01 ATEX 2101			✓	✓	
	Coil	AC 21, standard	PTB 01 ATEX 2175	700 mW / 65°C		✓	✓	
	Coil	AC 21, high-resistance	PTB 01 ATEX 2175	700 mW / 65°C		✓	✓	
	Coil	AC 21, standard	PTB 01 ATEX 2175	900 mW / 45°C		✓	✓	
	Coil	AC 21, high-resistance	PTB 01 ATEX 2175	900 mW / 45°C		✓	✓	
	Coil	AC 21, standard	PTB 01 ATEX 2175	900 mW / 60°C		✓	✓	
	Coil	AC 21, high-resistance	PTB 01 ATEX 2175	900 mW / 60°C		✓	✓	
	Coil	G1 642735, standard		600 mW / 50°C		✓		
	Coil	G1 642735, high-resistance		600 mW / 50°C		✓		
	Coil	G1 642735, standard	PTB 01 ATEX 2173	800 mW / 40°C		✓	✓	
	Coil	G1 642735, high-resistance	PTB 01 ATEX 2173	800 mW / 40°C		✓	✓	
	Coil	G1 642735, standard	PTB 01 ATEX 2173	1,000 mW / 40°C		✓	✓	
	Coil	G1 642735, high-resistance	PTB 01 ATEX 2173	1,000 mW / 40°C		✓	✓	
FESTO	Coil	MFH...IA-SA-EX GBXE022AIAD03	PTB 03 ATEX 2097			✓		✓
	Coil	(J)MFH...BIA-SA-EX GBXE022AIAD03	PTB 03 ATEX 2097			✓		✓
Norgren Herion	Coil	2050	PTB 07 ATEX 2019			✓	✓	✓
	Coil	2051	PTB 07 ATEX 2019			✓	✓	✓
	Coil	2052	PTB 07 ATEX 2019			✓	✓	✓
	Coil	2053	PTB 07 ATEX 2019			✓	✓	✓
	Coil	2085	PTB 06 ATEX 2001 U			✓		
	Coil	2086	PTB 06 ATEX 2001 U			✓	✓	✓
	Coil	3039	PTB 03 ATEX 2134				✓	
	Coil	2003	PTB 04 ATEX 2010				✓	
Hörbiger	Piezo	P8 38x RF-Nx-SPN65	DMT 01 ATEX E026X	30 V type	✓	✓		
	Piezo	P20 381RF-NG-CPN61	DMT 01 ATEX E025X	30 V type	✓	✓		
Parker	Coil VZ07	488650.01	LCIE 02 ATEX 6024X			✓	✓	
	Coil VZ33	494035.10	LCIE 02 ATEX 6024X			✓	✓	
	Coil VZ08	488660.01	LCIE 02 ATEX 6024X			✓	✓	
	Coil VZ09	488670.01	LCIE 02 ATEX 6024X			✓	✓	
	Coil VZ95	482160.01	LCIE 02 ATEX 6024X	EEx ia IIB T6		✓	✓	✓
	Coil VZ23	482870.01	LCIE 02 ATEX 6024X			✓	✓	
	Coil							
Samson	Coil	3701-11 (6 V)	PTB 02 ATEX 2178			✓		
	Coil	3701-12 (12 V)	PTB 02 ATEX 2178			✓	✓	✓
	Coil	3701-13 (24 V)	PTB 02 ATEX 2178			✓	✓	✓
	Coil	3963-11 (6 V)	PTB 01 ATEX 2085			✓		
	Coil	3963-12 (12 V)	PTB 01 ATEX 2085			✓	✓	✓
	Coil	3963-13 (24 V)	PTB 01 ATEX 2085			✓	✓	✓
	Coil	3964-11 (6 V)	PTB 02 ATEX 2047			✓		
	Coil	3964-12 (12 V)	PTB 02 ATEX 2047			✓	✓	✓
	Coil	3964-13 (24 V)	PTB 02 ATEX 2047			✓	✓	✓
	Coil	3965-11 (6 V)	PTB 05 ATEX 2044X			✓		
	Coil	3965-12 (12 V)	PTB 05 ATEX 2044X			✓	✓	✓
	Coil	3965-13 (24 V)	PTB 05 ATEX 2044X			✓	✓	✓
	Coil	3967-11 (6 V)	PTB 06 ATEX 2027			✓		
	Coil	3967-12 (12 V)	PTB 06 ATEX 2027			✓	✓	✓
	Coil	3967-13 (24 V)	PTB 06 ATEX 2027			✓	✓	✓
Seitz	Pilot valve	PV 12F73 Ci oH	PTB 99 ATEX 2146			✓	✓	✓
	Pilot valve	PV 12F73 Xi oH	PTB 00 ATEX 2030			✓	✓	✓
	Pilot valve	PV 12F73 Xi oH-2	PTB 00 ATEX 2030			✓	✓	✓
	Solenoid	11 G 52	PTB 01 ATEX 2020					✓

Digital OUT Solenoid drivers, Ex i

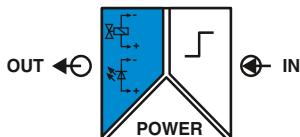


Solenoid drivers for the intrinsically safe control of Ex i solenoid valves, alarm transmitters or indicators installed in the Ex area.

- Input: logic (low/high signal)
- Output: 48 mA current limitation at 9.5 V, [Ex ia]
- Line fault detection (can be activated and deactivated)
 - Directly via signal channel
 - Or via switching output
- Transparent for test pulses
- Power supply and error indication possible via the DIN rail connector
- LED indicators for supply voltage, status, and fault in accordance with NAMUR NE 44
- Plug-in screw or Push-in connection technology
- Safe 3-way electrical isolation
- Up to SIL 2 in accordance with IEC 61508
- Installation in zone 2 permitted

Notes:

Information on the supply and error evaluation module, DIN rail connectors, system cabling, and marking material can be found from page 175

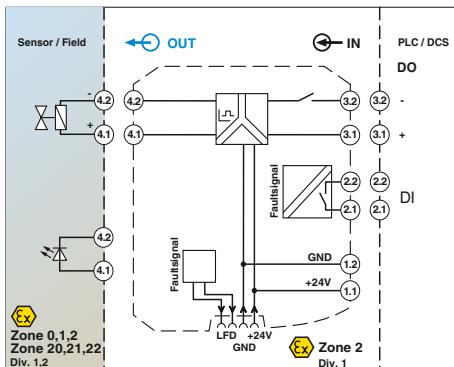

Solenoid driver, 48 mA current limitation with line fault detection

Functional Safety

Ex: EAC Ex IEC KC-SIL

Housing width 12.5 mm

Technical data

Input data	0 V DC ... 5 V DC (open) 15 V DC ... 30 V DC <12 mA 3 MΩ (high resistance (Mega Ω))
Output data	≥9.36 V DC (at 48 mA) >48 mA (with cable error detection) >22.5 V DC ≥269.3 Ω (internal resistance R _i) Yes <30 ms <50 Ω (short circuit on the line) >10 kΩ (line break)
Transparent for test pulses	Yes
Output voltage	N/O contact 30 V DC 50 mA Yes
Current limitation	19.2 V DC ... 30 V DC (24 V DC -20%...+25%) <90 mA (24 V DC) <1.8 W
No-load voltage	375 V (peak value in accordance with EN 60079-11) 300 V _{rms} (rated insulation voltage (overvoltage category II); degree of pollution 2, safe isolation as per EN 61010-1) 2.5 kV (50 Hz, 1 min., test voltage)
Internal resistance	-20°C ... 60°C (any mounting position) 10% ... 95% (non-condensing)
Immunity to short-circuiting	Green LED (supply voltage) LED yellow (switching state) Red LED (line errors)
Response time t _A	IP20
Line error detection	V0
Error message output	PA 6.6-FR
Switch contact	12.5 / 112.5 / 114.5 mm
Max. switching voltage	0.2 ... 2.5 mm ² / 0.2 ... 2.5 mm ² / 24 - 14
Maximum switching current	0.2 ... 1.5 mm ² / 0.2 ... 1.5 mm ² / 24 - 16
Short-circuit-proof	
General data	
Supply voltage range	25.3 V
Current draw	94 mA
Power dissipation	595 mW
Electrical isolation	253 V AC/DC
Ambient temperature range	Conformance/approvals
Humidity	CE-compliant, additionally EN 61326
Status indication	Ex II (1) G [Ex ia Ga] IIC
Degree of protection	Ex II (1) D [Ex ia Da] IIC
Inflammability class in accordance with UL 94	Ex II 3(1) G Ex nA [ia Ga] IIC T4 Gc X
Housing material	[Ex ia Ga] IIC, [Ex ia Da] IIC, Ex nA [ia Ga] IIC T4 Gc
Dimensions W/H/D	3
Screw connection rigid / flexible / AWG	
Push-in connection rigid / flexible / AWG	
Safety data as per ATEX	
Maximum output voltage U _o	
Maximum output current I _o	
Maximum output power P _o	
Maximum voltage U _m	
Conformance/approvals	
Conformance	
ATEX	
IECEx	
SIL in accordance with IEC 61508	



Ordering data

Description	Type	Order No.	Pcs./Pkt.
Solenoid driver, logic input, intrinsically safe output, line fault detection	Screw connection Push-in connection	MACX MCR-EX-SL-SD-23-48-LFD MACX MCR-EX-SL-SD-23-48-LFD-SP	2924867 2924870
			1 1

MACX Analog – Ex i signal conditioners with functional safety

Digital OUT

Solenoid drivers, Ex i

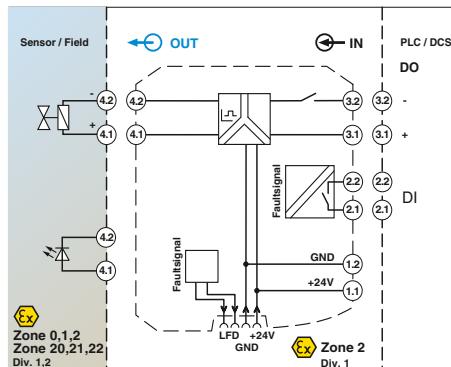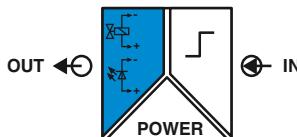

SIL
IEC 61508



Solenoid driver, 25.1 mA current limitation with line fault detection

EN Functional Safety

Ex: **Ex ia**

Housing width 12.5 mm

Technical data

Input data

- Switching level 0 signal ("L")
- Switching level 1 signal ("H")
- Current input signal
- Input impedance in the event of a line fault at the output

Transparent for test pulses

- Output data
- Output voltage
- Current limitation
- No-load voltage
- Internal resistance
- Immunity to short-circuiting
- Response time t_A
- Line error detection

Error message output

- Switch contact
- Max. switching voltage
- Maximum switching current
- Short-circuit-proof

General data

- Supply voltage range
- Current draw
- Power dissipation
- Electrical isolation

Output/input, error message output

0 V DC ... 5 V DC (open)

15 V DC ... 30 V DC

<12 mA

3 MΩ (high resistance (Mega Ω))

Yes

>4.64 V DC (at 25.1 mA)

>25.1 mA (with cable error detection)

>21.1 V DC

≥641 Ω (internal resistance R_i)

Yes

<30 ms

<50 Ω (short circuit on the line)

>10 kΩ (line break)

N/O contact

30 V DC

50 mA

Yes

19.2 V DC ... 30 V DC (24 V DC -20%...+25%)

<50 mA (24 V DC)

<0.8 W

375 V (peak value in accordance with EN 60079-11)
300 V_{rms} (rated insulation voltage (overvoltage category II);
degree of pollution 2, safe isolation as per EN 61010-1)
2.5 kV (50 Hz, 1 min., test voltage)

-20°C ... 60°C (any mounting position)

10% ... 95% (non-condensing)

Green LED (supply voltage)

LED yellow (switching state)

Red LED (line errors)

IP20

V0

PA 6.6-FR

12.5 / 112.5 / 114.5 mm

0.2 ... 2.5 mm² / 0.2 ... 2.5 mm² / 24 - 14

0.2 ... 1.5 mm² / 0.2 ... 1.5 mm² / 24 - 16

23.98 V

37.4 mA

224 mW

253 V AC/DC

CE-compliant, additionally EN 61326

Ex II (1) G [Ex ia Ga] IIC

Ex II (1) D [Ex ia Da] IIIC

Ex III(1) G Ex nA [ia Ga] IIC T4 Gc X

[Ex ia Ga] IIC, [Ex ia Da] IIIC, Ex nA [ia Ga] IIC T4 Gc

3

Ordering data

Description

Type

Order No.

Pcs./Pkt.

Solenoid driver, logic input, intrinsically safe output,
line fault detection


Screw connection
Push-in connection

MACX MCR-EX-SL-SD-21-25-LFD
MACX MCR-EX-SL-SD-21-25-LFD-SP

2905669
2905674

1
1

Digital OUT Solenoid drivers, Ex i

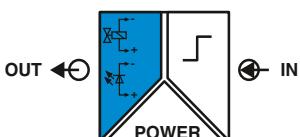

Solenoid drivers for the intrinsically safe control of Ex i solenoid valves, alarm transmitters or indicators installed in the Ex area.


- Input: logic (low/high signal)
 - Output: 48 mA current limitation at 9.7 V, [Ex ia]
 - Line fault detection (can be activated and deactivated)
 - Directly via signal channel
 - Or via switching output
 - Transparent for test pulses
 - Power supply and error indication possible via the DIN rail connector
 - LED indicators for supply voltage, status, and fault in accordance with NAMUR NE 44
 - Plug-in screw or Push-in connection technology
 - Safe 3-way electrical isolation
 - Up to SIL 3 in accordance with IEC/EN 61508
 - Installation in zone 2 permitted

Notes:

A list of suitable valves and notes for calculating a valve circuit are available from the download center at phoenixcontact.net/products.

Information on marking material can be found on page 178

Information on “Plug and play” connection using system cabling can be found from page 170

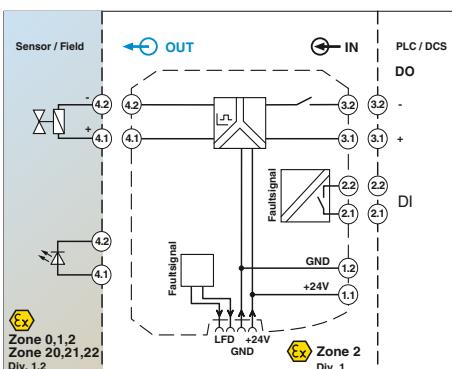

Solenoid driver, 48 mA current limitation with line fault detection

EAC Functional Safety

Ex: IEC

Housing width 12.5 mm



Technical data

Input data				
Switching level 0 signal ("L")	0 V DC ... 5 V DC (open)			
Switching level 1 signal ("H")	15 V DC ... 30 V DC			
Current input signal	<12 mA			
Input impedance in the event of a line fault at the output	3 MΩ (high resistance (Mega Ω))			
Transparent for test pulses	Yes			
Output data				
Output voltage	≥9.7 V DC (at 48 mA)			
Current limitation	>48 mA (with cable error detection)			
No-load voltage	>24.3 V DC			
Internal resistance	≥297 Ω (internal resistance R _i)			
Immunity to short-circuiting	Yes			
Response time t _A	<30 ms			
Line error detection	<50 Ω (short circuit on the line) >10 kΩ (line break)			
Error message output				
Switch contact	N/O contact			
Max. switching voltage	30 V DC			
Maximum switching current	50 mA			
Short-circuit-proof	Yes			
General data				
Supply voltage range	19.2 V DC ... 30 V DC (24 V DC -20%...+25%)			
Current draw	<90 mA (24 V DC)			
Power dissipation	<1.62 W			
Electrical isolation				
	Output/input, error message output			
Ambient temperature range	-20°C ... 60°C (any mounting position)			
Humidity	10% ... 95% (non-condensing)			
Status indication	Green LED (supply voltage) LED yellow (switching state) Red LED (line errors)			
Degree of protection	IP20			
Inflammability class in accordance with UL 94	V0			
Housing material	PA 6.6-FR			
Dimensions W/H/D	12.5 / 112.5 / 114.5 mm			
Screw connection rigid / flexible / AWG	0.2 ... 2.5 mm ² / 0.2 ... 2.5 mm ² / 24 - 14			
Push-in connection rigid / flexible / AWG	0.2 ... 1.5 mm ² / 0.2 ... 1.5 mm ² / 24 - 16			
Safety data as per ATEX				
Maximum output voltage U _o	27.06 V			
Maximum output current I _o	91.11 mA			
Maximum output power P _o	616 mW			
Maximum voltage U _m	253 V AC/DC			
Conformance/approvals				
Conformance	CE-compliant, additionally EN 61326			
ATEX	Ex II (1) G [Ex ia Ga] IIC Ex II (1) D [Ex ia Da] IIC Ex II 3(1) G Ex nA [ia Ga] IIC T4 Gc X [Ex ia Ga] IIC, [Ex ia Da] IIC, Ex nA [ia Ga] IIC T4 Gc 3			
IECEx				
SIL in accordance with IEC 61508				
Ordering data				
Description	Type	Order No.	Pcs./Pkt.	
Solenoid driver , logic input, intrinsically safe output, line fault detection	Screw connection Push-in connection	MACX MCR-EX-SL-SD-24-48-LFD MACX MCR-EX-SL-SD-24-48-LFD-SP	2906155 2906156	1 1

MACX Analog – Ex i signal conditioners with functional safety

Digital OUT

Solenoid drivers, Ex i

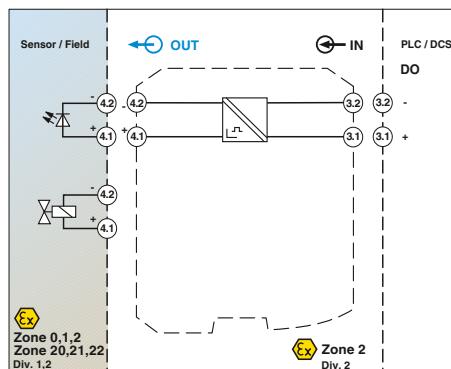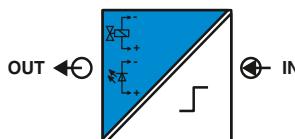

SIL
IEC 61508



Solenoid driver, current limitation 25 mA

Solenoid drivers for controlling intrinsically safe solenoid valves, alarm transmitters, and indicators installed in Ex areas.

- 20 to 30 V DC input
- Output [Ex ia]
- Various output characteristic curves compatible with the commercial solenoid valves
- Loop-powered: The required power is supplied via the control signal on the input side
- Mechanically compatible with DIN rail connector
- Galvanic 2-way isolation
- Up to SIL 3 in accordance with IEC 61508
- Installation in zone 2 permitted

Notes:

A list of suitable valves and notes for calculating a valve circuit are available from the download center at phoenixcontact.net/products.

Information on marking material can be found on page 178

Information on "Plug and play" connection using system cabling can be found from page 170

Input data

Voltage input signal

Current input signal

Output data

Output voltage

Current limitation

No-load voltage

Internal resistance

Immunity to short-circuiting

Response time t_A

General data

Power dissipation

Temperature coefficient

Electrical isolation

19.2 V DC ... 30 V DC (24 V DC -20%...+25%)
45 mA (at $U_e = 24$ V DC)

5.5 V DC (at 25 mA)

25 mA

21.9 V DC

641.1 Ω (internal resistance R_i)

Yes

20 ms

<0.845 W
0.01%/K

375 V (peak value in accordance with EN 60079-11)
300 V_{rms} (rated insulation voltage (overvoltage category II); degree of pollution 2, safe isolation as per EN 61010-1); 2.5 kV (50 Hz, 1 min., test voltage)

-40°C ... 60°C (any mounting position)

Yellow LED (switching state / status, lights up when output circuit is active)

IP20

V0

12.5 / 99 / 114.5 mm

0.2 ... 2.5 mm² / 0.2 ... 2.5 mm² / 24 - 14

0.2 ... 1.5 mm² / 0.2 ... 1.5 mm² / 24 - 16

25.1 V

39 mA

245 mW

253 V AC (125 V DC)

CE-compliant, additionally EN 61326

Ex II (1) G [Ex ia Ga] IIC/IIIB

Ex II (1) D [Ex ia Da] IIIC

Ex II 3 (1)G Ex nA [ia IIC Ga] IIC T4 Gc X

[Ex ia Ga] IIC/IIIB, [Ex ia Da] IIIC, Ex nA [ia IIC Ga] IIC T4 Gc

Class I Div 2; IS for Class I, II, III Div 1

3

Ordering data

Description

Solenoid driver, loop-powered, output intrinsically safe

Screw connection
Push-in connection


Type

MACX MCR-EX-SL-SD-21-25-LP
MACX MCR-EX-SL-SD-21-25-LP-SP

2865492
2924113

1

1

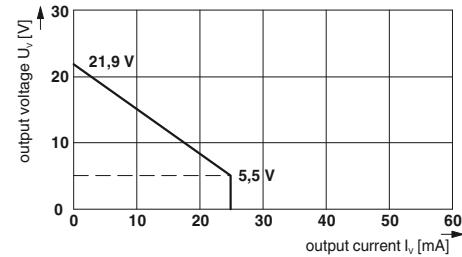

MACX Analog – Ex i signal conditioners with functional safety



Solenoid driver, current limitation 40 mA

Solenoid driver, current limitation 48 mA

Solenoid driver, current limitation 58 mA,
[Ex ia] IIIB

Functional Safety
Ex: EAC Ex
Housing width 12.5 mm

Technical data

19.2 V DC ... 30 V DC (24 V DC -20%...+25%)
65 mA (at $U_e = 24$ V DC)

10 V DC (at 40 mA)

40 mA

21.9 V DC

287 Ω (internal resistance R_i)

Yes

20 ms

<1.055 W
0.01%/K

375 V (peak value in accordance with EN 60079-11)
300 V_{rms} (rated insulation voltage (overvoltage category II);
degree of pollution 2, safe isolation as per EN 61010-1))
2.5 kV (50 Hz, 1 min., test voltage)

-40°C ... 60°C (any mounting position, pay attention to the
derating curve in the data sheet)

Yellow LED (switching state / status, lights up when output circuit
is active)

IP20

V0

12.5 / 99 / 114.5 mm

0.2 ... 2.5 mm² / 0.2 ... 2.5 mm² / 24 - 140.2 ... 1.5 mm² / 0.2 ... 1.5 mm² / 24 - 16

25.1 V
87 mA
550 mW
253 V AC (125 V DC)

CE-compliant, additionally EN 61326
 II (1) G [Ex ia Ga] IIC/IIIB/IIA
 II (1) D [Ex ia Da] IIIC
 II 3 (1)G Ex nA [ia IIC Ga] IIC T4 Gc X
[Ex ia Ga] IIC/IIIB/IIA
Class I Div 2; IS for Class I, II, III Div 1

3

Functional Safety
Ex: EAC Ex
Housing width 12.5 mm

Technical data

19.2 V DC ... 30 V DC (24 V DC -20%...+25%)
85 mA (at $U_e = 24$ V DC)

10.5 V DC (at 48 mA)

48 mA

24 V DC

275.7 Ω (internal resistance R_i)

Yes

20 ms

<1.41 W
0.01%/K

375 V (peak value in accordance with EN 60079-11)
300 V_{rms} (rated insulation voltage (overvoltage category II);
degree of pollution 2, safe isolation as per EN 61010-1))
2.5 kV (50 Hz, 1 min., test voltage)

-40°C ... 60°C (any mounting position, pay attention to the
derating curve in the data sheet)

Yellow LED (switching state / status, lights up when output circuit
is active)

IP20

V0

12.5 / 99 / 114.5 mm

0.2 ... 2.5 mm² / 0.2 ... 2.5 mm² / 24 - 140.2 ... 1.5 mm² / 0.2 ... 1.5 mm² / 24 - 16

25.1 V
101 mA
697 mW
253 V AC (125 V DC)

CE-compliant, additionally EN 61326
 II (1) G [Ex ia Ga] IIC/IIIB/IIA
 II (1) D [Ex ia Da] IIIC
 II 3 (1)G Ex nA [ia IIC Ga] IIC T4 Gc X
[Ex ia Ga] IIC/IIIB/IIA
Class I Div 2; IS for Class I, II, III Div 1

3

Functional Safety
Ex: EAC Ex
Housing width 12.5 mm

Technical data

19.2 V DC ... 30 V DC (24 V DC -20%...+25%)
95 mA (at $U_e = 24$ V DC)

12.9 V DC (at 58 mA)

58 mA

21.9 V DC

133.4 Ω (internal resistance R_i)

Yes

20 ms

<1.325 W
0.01%/K

375 V (peak value in accordance with EN 60079-11)
300 V_{rms} (rated insulation voltage (overvoltage category II);
degree of pollution 2, safe isolation as per EN 61010-1))
2.5 kV (50 Hz, 1 min., test voltage)

-40°C ... 60°C (any mounting position, pay attention to the
derating curve in the data sheet)

Yellow LED (switching state / status, lights up when output circuit
is active)

IP20

V0

12.5 / 99 / 114.5 mm

0.2 ... 2.5 mm² / 0.2 ... 2.5 mm² / 24 - 140.2 ... 1.5 mm² / 0.2 ... 1.5 mm² / 24 - 16

25.1 V
188 mA
1.18 W
253 V AC (125 V DC)

CE-compliant, additionally EN 61326
 II (1) G [Ex ia Ga] IIIB/IIA
 II (1) D [Ex ia Da] IIIC
 II 3 (1)G Ex nA [ia IIB Ga] IIC T4 Gc X
[Ex ia Ga] IIB/IIA
Class I Div 2; IS for Class I, II, III Div 1

3

Ordering data




Type	Order No.	Pcs./Pkt.
MACX MCR-EX-SL-SD-21-40-LP	2865764	1
MACX MCR-EX-SL-SD-21-40-LP-SP	2924139	1

Type	Order No.	Pcs./Pkt.
MACX MCR-EX-SL-SD-24-48-LP	2865609	1
MACX MCR-EX-SL-SD-24-48-LP-SP	2924126	1

Ordering data



Type	Order No.	Pcs./Pkt.
------	-----------	-----------

Type	Order No.	Pcs./Pkt.
------	-----------	-----------

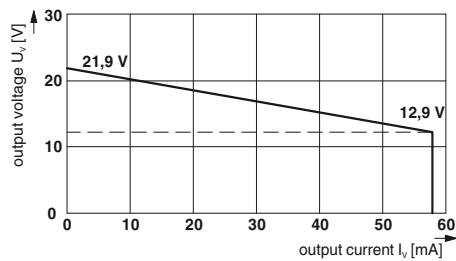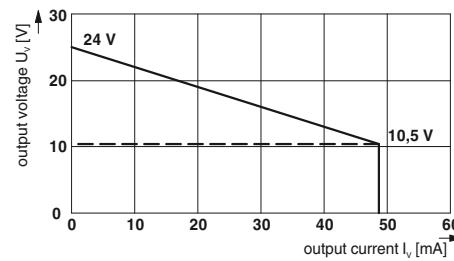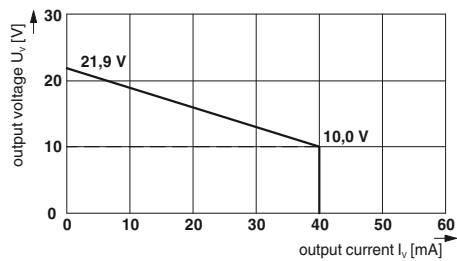

Limit values, threshold value switches

new

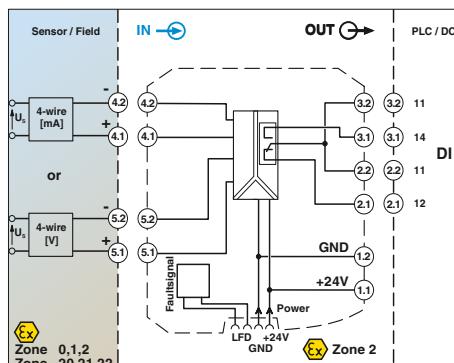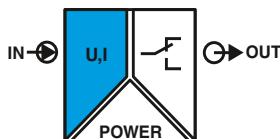

Configurable, with relay PDT output



Ex: IEC Ex

Housing width 12.5 mm

Technical data

Input data

Voltage input signal

0.1 V ... 10 V

0.1 V ... 10.5 V (maximum range)

± 10 mV

Total error of the voltage input maximum

0.2 mA ... 20 mA

Current input signal

0.18 mA ... 21 mA (maximum range)

± 20 μ A

Total error of the current input maximum

$<28 \Omega / >100$ k Ω

Input resistance

- / configurable via DIP switch (in 1.25% increments) and potentiometer (linearly up to 2% of the switching threshold set via the DIP switch)

Switching points

Current/voltage input

Switching hysteresis

off: approx. 0.5%, on: approx. 1%

Line error detection

Break U <50 mV, I <0.1 mA

Short circuit U >10.8 V, I >21.1 mA

Relay output

Switching output

1 PDT

Contact type

≤ 4 A AC (cos phi = 1)

Maximum switching current

$\leq 10^7$ cycles

Mechanical service life

≤ 250 V AC

Switching voltage

≤ 120 V DC

General data

Supply voltage range

9.6 V DC ... 30 V DC (12 V DC ... 24 V DC (-20% ... +25%))

Current consumption, maximum

90 mA (10 V DC)

Current consumption, typical

38 mA (24 V DC)

Current draw

≤ 30 mA (30 V DC)

Power consumption

≤ 1.2 W

Power dissipation

<0.9 W

Temperature coefficient

0.01%/K

Step response (0 - 99%)

≤ 22 ms

Switching point accuracy

<0.1 %

Maximum transmission error

0.1%

Electrical isolation

Input/output

Input/output/supply, DIN rail connector

375 V (peak value in accordance with EN 60079-11)

300 V_{rms} (rated insulation voltage (overvoltage category II; degree of pollution 2, safe isolation as per EN 61010-1))

2.5 kV (50 Hz, 1 min., test voltage)

Ambient temperature (operation)

-20°C ... 65°C (any mounting position)

Ambient temperature (storage/transport)

-40°C ... 85°C

Humidity

5% ... 95% (non-condensing)

Altitude

$\leq 2,000$ m

Inflammability class in accordance with UL 94

V0

Dimensions W/H/D

12.5 / 99 / 114.5 mm

Conformance/approvals

CE-compliant, additionally EN 61326

Conformance

II (1) G [Ex ia Ga] IIC

ATEX

II (1) D [Ex ia Da] IIIC

II 3(1) G Ex ec nC [ia Ga] IIC T4 Gc

UL applied for

2 (single-channel)

SIL in accordance with IEC 61508

3 (two-channel)

Ordering data

Description	Type	Order No.	Pcs./Pkt.
Screw connection	MACX MCR-EX-SL-UI-REL	2906164	1
Spring-cage connection	MACX MCR-EX-SL-UI-REL-SP	2906165	1

MACX Analog accessories

Termination Carriers for MACX Analog signal conditioners



TC... Termination Carriers are compact solutions for quickly and smoothly connecting DIN rail devices from the MACX Analog series to input and output cards of automation systems using system cabling.

The Termination Carriers combine the advantages of modular DIN rail devices with those offered by plug and play rapid cabling solutions to provide a consistent solution for system technology.

Termination carriers are also available for MINI Analog Pro and PSR safety devices.

Compact

- Saves up to 30% of space due to compact design

Rugged and reliable

- Stable, vibration-resistant aluminum carrier device profile
- PCB is completely decoupled from modules
- PCB without active components
- Redundant supply and monitoring in separate DIN rail module

Easy maintenance

- Use of standard DIN rail devices
- Easy access to connection points
- Quick and safe module connection with plug-in and coded cable sets

Flexible

- Horizontal or vertical DIN rail mounting
- Profile section without pitch markings for I/O cards with specific number of channels
- Can be specifically adapted for I/O cards of various automation systems with different system plug types



Select standard DIN rail device



Select module carrier



Select controller-specific front adapter and system cable

Termination Carriers for MACX Analog signal conditioners

The TC-D37SUB-ADIO16-EX-P-UNI

universal Termination Carrier is a compact solution for connecting signal conditioners from the MACX Analog series to analog or binary input and output cards of automation systems.

The **TC-D37SUB-AIO16-EX-PS-UNI** termination-carrier design, when combined with the MACX MCR-S-MUX HART multiplexer, also enables communication between HART-compatible field devices and a management system.

The TC-D37SUB-ADIO16-2EX-P-UNI

universal Termination Carrier is a compact solution for connecting two-channel signal conditioners from the MACX Analog series to analog or binary input and output cards of automation systems.

- Connection of up to 16 single-channel (Ex i-)signal conditioners
- Universal 1:1 signal routing to a 37-pos. D-SUB connector
- For system cables with D-SUB socket and open ends for universal connection
- Redundant supply and monitoring in separate DIN rail module

Notes:

You will find information about signal conditioners from the MACX Analog product range in the INTERFACE catalog or at phoenixcontact.com.

You can find information about available system cables for D-SUB connectors in the INTERFACE catalog or at phoenixcontact.com.

Contact us: specific Termination Carriers designs for I/O modules of various automation systems are available, planned or can be implemented in accordance with your specification.



Ex:
Housing width 242 mm

Technical data


General data	Connection to the control system level No. of pos. Maximum operating voltage Maximum permissible current Rated insulation voltage Rated surge voltage Degree of pollution Overvoltage category Air clearances and creepage distances Ambient temperature range	D-SUB pin strip 37 <30 V DC (per signal/channel) 1 A (signal/channel) 50 V (basic insulation) 0.5 kV 2 II DIN EN 50178 (basic insulation) -20°C ... 60°C (please observe module specifications)
Shock	15g, in accordance with IEC 60068-2-27	
Vibration (operation)	2g, in accordance with IEC 60068-2-6	
Dimensions W/H/D	242 / 170 / 160 mm	
EMC note		
Power supply via power module	19.2 V DC ... 30 V DC	
Input voltage range	Yes, decoupled from diodes	
Redundant supply	Yes	
Polarization and surge protection	2x 2.5 A on PCB, slow-blow (replaceable)	
Fuse		
Status indication	1x red LED (error) 2x green LEDs (PWR1 and PWR2)	
Switching output	1 N/C contact (alarm = open)	
Maximum switching voltage	50 V DC (0.3 A) / 30 V DC (2 A) / 33 V AC (2 A)	

Ordering data

Description	Type	Order No.	Pcs./Pkt.
Universal Termination Carrier for 16 single-channel MACX MCR isolators			
- With connection for multiplexer	TC-D37SUB-ADIO16-EX-P-UNI	2924854	1
Universal Termination Carrier for 16 two-channel MACX MCR isolators	TC-D37SUB-AIO16-EX-PS-UNI	2902932	1
	TC-2D37SUB-ADIO32-2EX-P-UNI	2904684	1

Accessories

Power and fault signaling module HART multiplexer, 32-channel	TC-MAXX-MCR-PTB	2904673	1
	MACX MCR-S-MUX	2865599	1

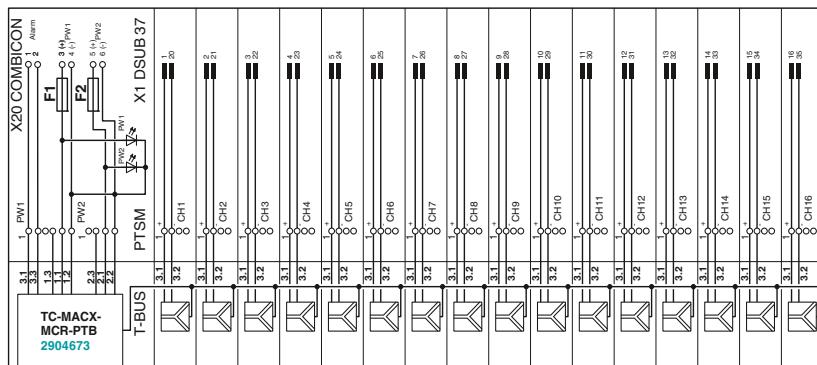


TC-D37SUB-ADIO16-EX-P-UNI and TC-D37SUB-AIO16-EX-PS-UNI connection scheme

Multiplexers for HART signals

Multiplexers for digital connection of HART-compatible field devices (such as measuring transducers or control valves) to a PC or management system.

- Supports online configuration and diagnostics for the connected HART-compatibles field devices
- Constant documentation of process variables and states
- 32 HART channels per multiplexer
- Up to 128 HART multiplexers at one PC interface
- Communication via software tool (e.g. HART OPC Server) using RS-485 interface
- Electrical isolation between auxiliary energy, RS-485 bus and the HART channels
- HART field devices are accessed at the same time that the measurement signal is transmitted without affecting measured value processing
- HART field devices connected via universal HART connection boards; direct connection if processing non-Ex signals, with separate Ex i signal isolator connected upstream if processing Ex signals
- Power supplied via HART connection board

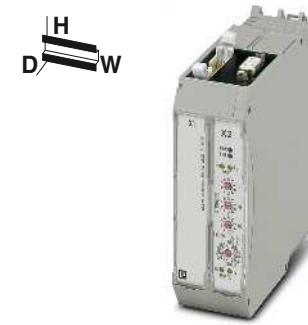

HART multiplexer, 32-channel



Housing width 35.2 mm

Technical data

Field devices interface (HART)	16 or 32; adjustable using a switch Flat-ribbon cable, 14-pos. (inclusive) HART FSK HART Field Communication Protocol Rev. 6.0 (downward compatible up to Rev 4.0); FSK Physical Layer Specification (Rev. 8.1) Two yellow "Tx" and "Rx" "HART" LEDs Red "ERR" LED (flashes in case of an error in the HART bus)
RS-485 interface	D-SUB-9 female connector RS-485 Compatible with OPC HART server, PDM, PRM, and FDT/DTM
Number of HART multiplexers per bus segment	Max 31
Address setting	0...127; using a rotary switch at the front
Data rate	9600 / 19200 / 38400 / 57600 [bps]; via rotary switch at the front
Transmission length	≤1200 m
Display	Two yellow "Tx" and "Rx" "RS-485" LEDs
General data	18 V ... 31.2 V 24 V DC 55 mA 1.35 W Green "PWR" LED Yes (no faulty devices / output states)
Supply voltage range	350 V AC
Nominal supply voltage	100 V DC (capacitive)
Current consumption	350 V AC
Power consumption	350 V AC
Operating voltage display	Processor error: The "PWR" LED flashes; error in the HART communication: the "ERR" LED flashes
Undervoltage monitoring	-20°C ... 60°C ≤95% (non-condensing) 35.2 / 99 / 114.5 mm
Galvanic isolation of HART signal/RS-485	
Galvanic isolation of HART signals between each other	
Galvanic isolation of HART signal/supply	
Galvanic isolation of RS-485/supply	
Error monitoring	
Ambient temperature range	
Humidity	
Dimensions W/H/D	
Conformance/approvals	CE-compliant
Conformance	

Ordering data

Description	Type	Order No.	Pcs./Pkt.
HART multiplexer, 32-channel, including two 14-conductor flat-ribbon cable	MACX MCR-S-MUX	2865599	1

Accessories

Universal Termination Carrier for 16 single-channel MACX MCR isolators	TC-D37SUB-AIO16-EX-PS-UNI	2902932	1
- With connection for multiplexer			
Module carrier for 16 MINI Analog channels, power and feed-through module	TC-D37SUB-AIO16-M-PS-UNI	2902934	1
- With connection for MACX MCR-S-MUX HART multiplexer			
HART connection board	MACX MCR-S-MUX-TB	2308124	1
Interface converter	PSM-ME-RS232/RS485-P	2744416	1
Repeater , for electrical isolation and increased range	PSM-ME-RS485/RS485-P	2744429	1

Accessories

Programming adapters

The IFS-USB-PROG-ADAPTER programming adapter is used for configuring Phoenix Contact Interface modules with S-PORT interface.

The adapter is used with FDT/DTM software or ANALOG-CONF software. For programming the MACX Analog, MINI Analog Pro, and MINI Analog.



Ordering data			
Description	Type	Order No.	Pcs./Pkt.
Programming adapter for configuring modules with S-PORT interface	IFS-USB-PROG-ADAPTER	2811271	1

Accessories

Shield fast connection

- For connecting cable shielding to cable terminal points
- Can be connected to PLUGTRAB PT
- Easy assembly



Ordering data			
Description	Type	Order No.	Pcs./Pkt.
Shield fast connection, for connection to PLUGTRAB PT For Ø 3-6 mm For Ø 5-10 mm	SSA 3-6 SSA 5-10	2839295 2839512	10 10

Accessories**ME 6,2 TBUS... DIN rail connectors**

DIN rail connector (5-pos.) for bridging the supply voltage of 12.5 mm wide

MACX analog modules

- Reduces wiring costs
- System can be extended or module replaced even while process is active
- Inter-extendable

**Ordering data**

Description	Type	Order No.	Pcs./Pkt.
DIN rail connector , for bridging the supply voltage, can be snapped onto 35 mm DIN rails in accordance with EN 60715, UL-approved Color: gray Color: green	ME 6,2 TBUS-2 1,5/5-ST-3,81 GY ME 6,2 TBUS-2 1,5/5-ST-3,81 GN	2695439 2869728	10

Accessories**Dummy –****MACX MCR-EX-DUMMY-ISOLATOR**

Dummy module with no function for connecting unused intrinsically safe signal cables, with plug-in connection terminal blocks.

**Ordering data**


Description	Type	Order No.	Pcs./Pkt.
Dummy module with no function with screw connection with Push-in connection	MACX MCR-EX-DUMMY-ISOLATOR MACX MCR-EX-DUMMY-ISOLATOR-SP	2904970 2905846	1 1

Accessories

Power and error message modules

Power and fault signaling module for feeding the 24 V supply voltage to the DIN rail connectors and signaling line faults and power supply failures.

- One-time or redundant supply, decoupled from diode, protected against polarization
- Supply current up to 3.75 A
- Relay output (PDT) and flashing LED for error messages
- Error message in the event of a power supply failure or fuse fault
- Bus cable fault message for MACX MCR-...-(2)NAM... devices connected via DIN rail connectors
- Replaceable fuse
- Installation in zone 2 permitted

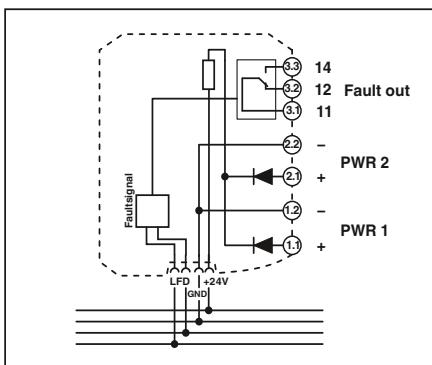

Ex n
Housing width 17.5 mm

Technical data

Input data	19.2 V DC ... 30 V DC (24 V DC -20%...+25%)
Voltage input signal	Yes, decoupled from diodes
Redundant supply	Yes
Polarization and surge protection	Yes
Output data	3.75 A
Maximum output signal	Input voltage - max 0.8 V at 3.75 A
Output voltage	Relay
Switching output	1 PDT
Contact type	Gold (Au)
Contact material	50 V AC (2 A) / 30 V DC (2 A) / 50 V DC (0.22 A)
Max. switching voltage	-20°C ... 60°C (any mounting position)
General data	5% ... 95% (non-condensing)
Ambient temperature range	5 A (replaceable), slow-blow 250 V AC
Humidity	1 x red LED (error)
Fuse	2 x green LEDs (PWR1 and PWR2)
Status indication	V0
Inflammability class in accordance with UL 94	Polyamide (PA 6.6)
Housing material	17.5 / 99 / 114.5 mm
Dimensions W/H/D	0.2 ... 2.5 mm ² / 0.2 ... 2.5 mm ² / 24 - 14
Screw connection rigid / flexible / AWG	0.2 ... 1.5 mm ² / 0.2 ... 1.5 mm ² / 24 - 16
Push-in connection rigid / flexible / AWG	
Conformance/approvals	
Conformance	CE-compliant
ATEX	II 3 G Ex nA nC IIC T4 Gc X
IECEx	Ex nA nC IIC T4 Gc X
UL, USA/Canada	UL 61010 Listed
	Class I, Div. 2, Groups A, B, C, D T5
	Class I, Zone 2, Group IIC

Ordering data


Description	Type	Order No.	Pcs./Pkt.
Supply and error message module, including the relevant DIN rail connector ME 17.5 TBUS 1,5/5-ST-3,81 GN	Screw connection Push-in connection	MACX MCR-PTB MACX MCR-PTB-SP	2865625 2924184

Accessories

Power and error message modules

Power and fault signaling module for supplying the 24 V supply voltage to the DIN rail connectors of the MACX Analog Termination Carriers and signaling line faults and energy supply failures.

- One-time or redundant supply, decoupled from diode, protected against polarization
- Feed-in current up to 2 A protected by Termination Carrier PCB
- Relay output (PDT) and flashing LED for error messages
- Error message in the event of a power supply failure or fuse fault
- Bus cable fault message for MACX MCR-...(2)NAM... devices connected via DIN rail connectors
- Installation in zone 2 possible

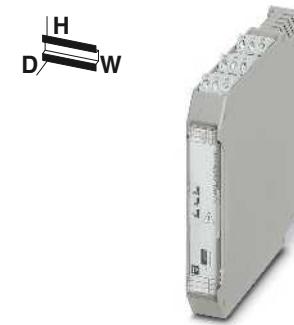

Ex:
Housing width 17.5 mm

Technical data

Input data	Voltage input signal Redundant supply Polarization and surge protection	19.2 V DC ... 30 V DC Yes, decoupled from diodes Yes
Output data	Maximum output signal Output voltage	2 A (redundancy range) Input voltage - 0.7 V
Switching output	Contact type Contact material Max. switching voltage	Relay 1 PDT Gold (Au) 50 V AC/DC (33 V AC (2 A) / 50 V DC (0.3 A) / 30 V DC (2 A))
General data	Ambient temperature range Humidity Status indication	-20°C ... 60°C (only on Termination Carrier) 5% ... 95% (non-condensing) 1 x red LED (error) 2 x green LEDs (PWR1 and PWR2) V0 Polyamide (PA 6.6) 17.5 / 99 / 114.5 mm 0.2 ... 2.5 mm ² / 0.2 ... 2.5 mm ² / 24 - 14 0.2 ... 2.5 mm ² / 0.2 ... 2.5 mm ² / 24 - 14
Conformance/approvals	Conformance ATEX IECEx UL, USA/Canada	CE-compliant Ex nA IIC T4 Gc X UL 61010 Listed Class I, Div. 2, Groups A, B, C, D T5 Class I, Zone 2, Group IIC

Ordering data

Description	Type	Order No.	Pcs./Pkt.
Power and fault signaling module without integrated fuse	Screw connection	TC-MACX-MCR-PTB	2904673

Accessories

Resistance circuits

Double-level terminal block with resistance circuit in accordance with NAMUR for line fault detection in the case of mechanical contacts

Important:

- For intrinsically safe circuits, only in combination with D-UKK 3/5 cover



Ordering data				
Description	Color	Type	Order No.	Pcs./Pkt.
Double-level terminal block , with preassembled resistors				
with screw connection Cover , width 2.5 mm	gray gray blue	UKK 5-2R/NAMUR D-UKK 3/5 D-UKK 3/5 BU	2941662 2770024 2770105	50 50 50

Accessories

Test plugs



Ordering data				
Description	Color	Type	Order No.	Pcs./Pkt.
Test plug , consisting of: Metal part for 2.3 mm Ø socket hole and Insulating sleeve , for MPS metal part				
gray	MPS-MT	0201744	10	
red	MPS-IH RD	0201676	10	
black	MPS-IH BK	0201731	10	
gray	MPS-IH GY	0201728	10	
green	MPS-IH GN	0201702	10	
yellow	MPS-IH YE	0201692	10	
blue	MPS-IH BU	0201689	10	
white	MPS-IH WH	0201663	10	

Accessories

Marking material for device marking

- For device marking inside the control cabinet and in the field
- Self-adhesive with high adhesive strengths
- Large temperature range



Ordering data				
Description	Color	Type	Order No.	Pcs./Pkt.
UniCard , with self-adhesive plastic labels 10-part, lettering field size: 11 x 9 mm UniCard , with self-adhesive plastic labels, marked in accordance with customer specifications For ordering details, see Catalog 3 or phoenixcontact.net/product.	white	UC-EMLP (11X9)	0819291	10
10-part, lettering field size: 11 x 9 mm	white	UC-EMLP (11X9) CUS	0824547	1



The Field Analog process indicators allow you to monitor and display analog and temperature signals as well as control them via digital and analog inputs and outputs.

Further advantages:

- 2-conductor sensors are powered by the integrated measuring transducer supply
- International use, thanks to UL and CSA approvals



Universal use

Field Analog process indicators are available for field and control panel installation. The universal inputs allow you to record current, voltage, RTDs, and TCs.



Everything at a glance

Real-time process values are easy to read on the five-digit backlit displays. The bar graph also provides you with a quick overview. You can recognize alarm statuses easily from a distance by their changing color.



Easy installation and startup

Thanks to the standardized housing dimensions and plug-in connection terminal blocks, the indicators are easy to install. The devices are easy to configure via the keyboard on the front or via FDT/DTM software.



Intrinsic safety zone 0, zone 20

Also for intrinsically safe circuits in the Ex area: versions with ATEX, CSA, and FM approval.



Distributed control cabinet installation

Measurement and control temperature transducer for resistance thermometers, thermocouples, resistance-type sensors, and voltage sensors are also available for control cabinet installation.





Head-mounted transducer

With head-mounted transducers you can record temperatures directly in the field and convert them into standard signals.

Field Analog – Process indicators and field devices

Multifunctional process indicators

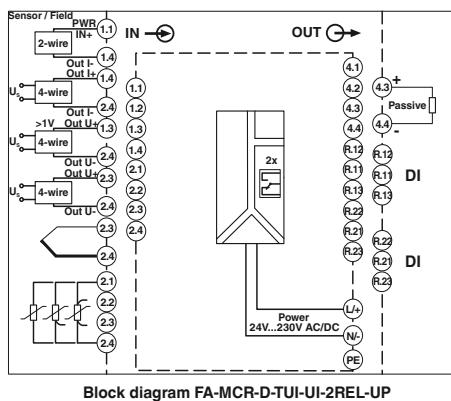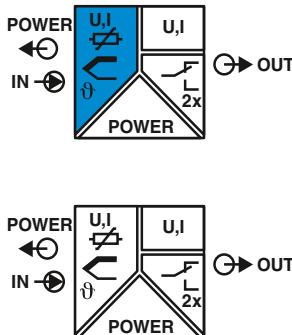

**Multifunctional process indicator
for installation in the control cabinet**

For installation in the control cabinet

- Multifunctional process indicator, in control panel component housing for monitoring and displaying analog measurement data
- Supply of 2-conductor sensors
- Safe 4-way isolation
- Configurable via software or hardware keyboard on the front
- Universal inputs for connection of current, voltage, RTDs, and TCs
- Limit value monitoring with two relay outputs
- Process signal transmission via analog output
- Display changes color in the event of an error

Notes:

The configuration software can be downloaded from the Internet (phoenixcontact.net/products).



Housing width 96 mm

Technical data

Input data	U input 0 V ... 10 V 2 V ... 10 V 0 V ... 5 V 0 V ... 1 V 1 V ... 5 V -1 V ... 1 V -10 V ... 10 V -30 V ... 30 V -100 mV ... 100 mV	I input 0 mA ... 20 mA +10% 4 mA ... 20 mA +10%
RTD	TC Pt, Ni, Cu sensors 2-, 3-, 4-conductor 200 ms -200°C ... 1,100°C (range depends on sensor type, adjustable)	J, K, T, N, B, S, R, U, L, C, D - 200 ms -200°C ... 2,495°C (range depends on sensor type, adjustable)
Input resistance	-	10 Ω
Output data	U output 0 V ... 10 V 2 V ... 10 V 0 V ... 5 V 1 V ... 5 V	I output 0 mA ... 20 mA 4 mA ... 20 mA
Output signal		
Display	Number of displayed positions Switching output	7-segment LC display, with backlight, dot matrix for text/bar graph 5 Transistor output, active
Number of outputs	1	Open collector output
Switching output	1	Relay output
Contact type	2 PDT	30 V DC (3 A) / 230 V AC (3 A)
Max. switching voltage	3 A	3 A
Maximum switching current	10 mA	10 mA
Minimum switching current		
General data	24 V DC ... 230 V DC IP65 from the front -20°C ... 60°C PC-GF10 96 / 48 / 151.8 mm 92 x 45 mm 0.14 ... 1.5 mm² / 0.14 ... 1.5 mm² / 26 - 16	
Supply voltage range	FA MCR-D-TUI-UI-2REL-UP	FA MCR-EX-D-TUI-UI-2REL-UP
Degree of protection	CE-compliant	CE-compliant
Ambient temperature (operation)	-	Ex II (1) G [Ex ia Ga] IIC
Housing material	UL 61010 Recognized	UL 61010 Recognized
Dimensions W/H/D	-	AIS, NI/I/2/ABCDEFG/T4
Control panel cutout	CSA GP	AIS, NI/I/2/ABCDEF/G/T4
Screw connection rigid / flexible / AWG	GL EMC 1 C	EMC1 C



Ordering data

Description	Type	Order No.	Pcs./Pkt.
FA MCR-EX-D-TUI-UI-2REL-UP		2907216	1
FA MCR-D-TUI-UI-2REL-UP		2907064	1

Accessories

Programming adapter for configuring modules with T-PORT interface	MCR-PAC-T-USB	2309000	1
DIN rail adapters for displays	FA MCR-D-RM	1032996	1

Multifunctional process indicators

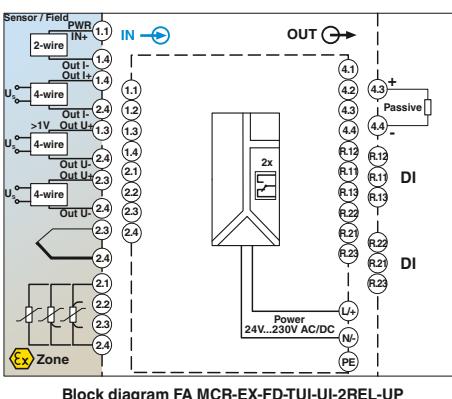
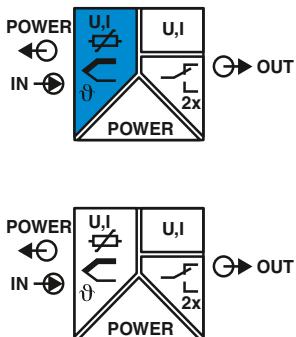


Field housing

- Multifunctional process indicator, in control panel component housing for monitoring and displaying analog measurement data
- Supply of 2-conductor sensors
- Safe 4-way isolation
- Configurable via software or hardware keyboard on the front
- Universal inputs for connection of current, voltage, RTDs, and TCs
- Limit value monitoring with two relay outputs
- Process signal transmission via analog output
- Display changes color in the event of an error

Technical data	
Input data	I input
Input signal	0 V ... 10 V 2 V ... 10 V 0 V ... 5 V 0 V ... 1 V 1 V ... 5 V -1 V ... 1 V -10 V ... 10 V -30 V ... 30 V -100 mV ... 100 mV
RTD	TC Pt, Ni, Cu sensors 2-, 3-, 4-conductor
Input resistance	200 ms -200°C ... 1,100°C (range depends on sensor type, adjustable)
Output data	TC J, K, T, N, B, S, R, U, L, C, D -
Output signal	200 ms -200°C ... 2,495°C (range depends on sensor type, adjustable)
Display	10 Ω 7-segment LC display, with backlight, dot matrix for text/bar graph
Number of displayed positions	5
Switching output	Transistor output, active Open collector output
Number of outputs	1
Switching output	Relay output 2 PDT 30 V DC (3 A) / 230 V AC (3 A) 3 A 10 mA
Contact type	
Max. switching voltage	24 V DC ... 230 V DC
Maximum switching current	IP67
Minimum switching current	-40°C ... 50°C (The readability of the display is no longer guaranteed at temperatures below -30°C (-22°F).)
General data	PBT GF30 199 / 160 / 96 mm 0.2 ... 2.5 mm ² / 0.2 ... 2.5 mm ² / 24 - 14
Supply voltage range	FA MCR-EX-FD-TUI-UI-2REL-UP
Degree of protection	CE-compliant IEC II (1) G [Ex ia Ga] IIC UL 61010 Recognized AIS / I / 1 / ABCDEFG Associated Apparatus
Ambient temperature (operation)	CE-compliant - UL 61010 Recognized - CSA GP

Ordering data			
Description	Type	Order No.	Pcs./Pkt.
FA MCR-EX-FD-TUI-UI-2REL-UP		2907781	1
FA MCR-FD-TUI-UI-2REL-UP		2907780	1
Accessories			
Programming adapter for configuring modules with T-PORT interface	MCR-PAC-T-USB	2309000	1
Pipe or wall mounting set, for use with multi-functional process indicator in field housing	FA MCR-FD-PM	2908739	1

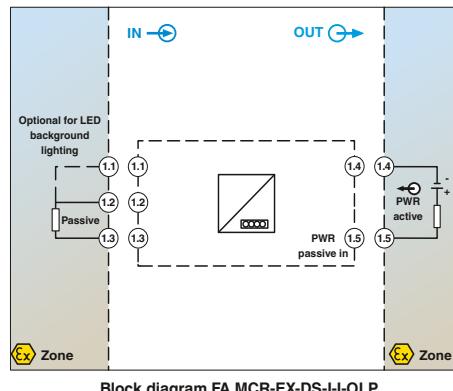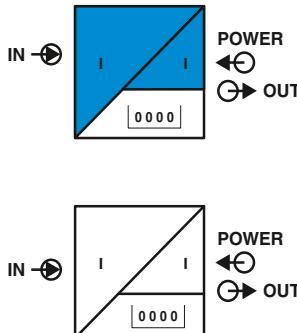

Loop-powered process indicator with HART communication for installation in the control cabinet

Ex
Ex II 2G Ex ib IIC T6 Gb

Housing width 96 mm

Technical data

Input data	I	HART
Input signal	4 mA ... 20 mA	up to 4x HART signals
Maximum input signal	200 mA	-
Voltage drop	≤1 V	≤1.9 V
	≤3.9 V (with display lighting)	≤4.8 V (with display lighting)
Input impedance	Approx. 50 Ω	$R_x = 40 \Omega / C_x = 2.3 \text{ nF}$
Output data	7-segment LC display, with backlight, dot matrix for text/bar graph	
Display	5	Loop-powered, no external supply necessary
Number of the displayed positions		
General data	>13 bit	
Supply voltage range	IP65 (front)	
	IP20 (on the rear)	
Resolution A/D	-40°C ... 60°C	
Degree of protection	Aluminum / polycarbonate	
Ambient temperature (operation)	96 / 48 / 41.5 mm	
Housing material	92 x 45 mm	
Dimensions W/H/D	0.14 ... 1.5 mm ² / 0.14 ... 1.5 mm ² / 26 - 16	
Control panel cutout		
Screw connection rigid / flexible / AWG		
Conformance/approvals	CE-compliant	CE-compliant
Conformance	Ex II 2G Ex ib IIC T6 Gb	-
ATEX	UL 61010 Listed	UL 61010 Listed
UL, USA/Canada	-	-
FM approval	-	-
CSA	-	-

Ordering data



Description	Type	Order No.	Pcs./Pkt.
Output loop-powered process indicator inside the control panel housing for representing current or HART signals	FA MCR-EX-DS-I-I-OLP	2908800	1
	FA MCR-DS-I-I-OLP	2908781	1
Accessories			
DIN rail adapters for displays	FA MCR-D-RM	1032996	1

For installation in the control cabinet

- Loop-powered
- Display of 4 to 20 mA or HART signals
- Low voltage drop
- 5-digit 7-segment display
- Display value can be scaled
- Low installation depth
- Configurable via front keyboard
- SIL-impact-free in accordance with EN61508
- Can be installed in zone 1

Loop-powered process indicators

new

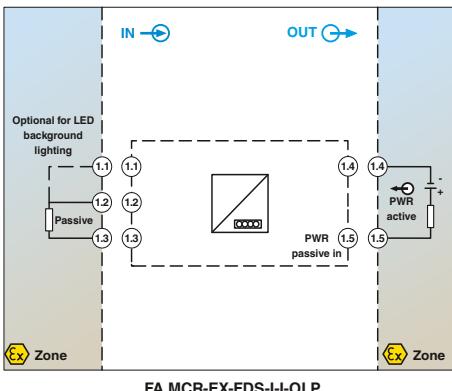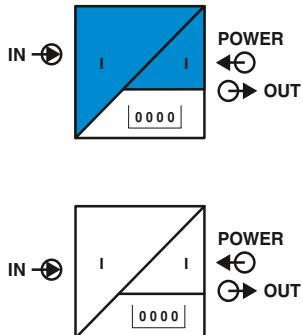

Ex: Housing width 131 mm

Technical data



I	HART
4 mA ... 20 mA	up to 4x HART signals
200 mA	-
≤1 V	≤1.9 V
≤3.9 V (with display lighting)	≤4.8 V (with display lighting)
Approx. 50 Ω	$R_x = 40 \Omega / C_x = 2.3 \text{ nF}$
7-segment LC display, with backlight, dot matrix for text/bar graph	
5	
Loop-powered, no external supply necessary	
>13 bit	
IP66/IP67	
NEMA 4X	
-40°C ... 60°C	
Aluminum	
131 / 81.5 / 55.5 mm	
0.14 ... 1.5 mm² / 0.14 ... 1.5 mm² / 26 - 16	
Conformance	CE-compliant
ATEX	II 2G Ex ib IIC T6 Gb
UL, USA/Canada	UL 61010 Listed
FM approval	-
CSA	-

Ordering data

Description	Type	Order No.	Pcs./Pkt.
Output loop-powered process indicator inside field housing for representing current or HART signals	FA MCR-EX-FDS-I-I-OLP	2908801	1
	FA MCR-FDS-I-I-OLP	2908782	1
Accessories			
Pipe or wall mounting set, for use with output loop-powered process indicator in field housing	FA MCR-FDS-PM	2908783	1

Displays

Standard signals

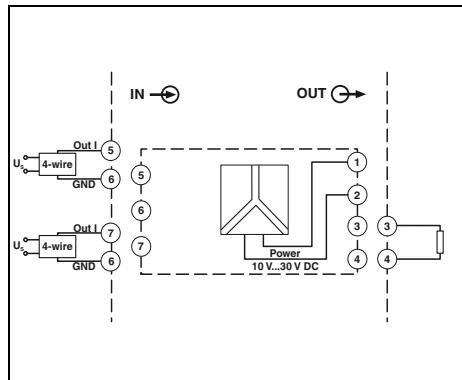

For analog standard signals,
configurable

For installation in the control cabinet

- For 0 to 10 V and 0(4) to 20 mA standard analog signals
- Configurable
- 5 positions displayed
- 8 mm LED, 7-segment
- Galvanically isolated
- Minimum/maximum value storage
- Latch/hold function for storing the display value
- Display 48 x 24 mm
- Totalizing counter

Housing width 48 mm

Technical data



Input data	U input 0 ... 10 V / 2 ... 10 V 30 V DC >1 MΩ	I input 0 ... 20 mA / 4 ... 20 mA 50 mA Approx. 100 Ω with 5 mA / approx. 70 Ω with 20 mA
Resolution	1 mV	2 μA
Measuring rate	0.1 s⁻¹ / 0.5 s⁻¹	
Input latch signal	Display stop	
Switching level	4 V DC ... 30 V DC 0 V DC ... 2 V DC	
Output data	7-segment LED; 8 mm; red	
Display	5	
Number of the displayed positions	<0.1% ±1 digit (at an ambient temperature of 20°C)	
Accuracy	10 V DC ... 30 V DC	
General data	50 mA	
Supply voltage range	EEPROM 1 mil. memory cycles or 10 years	
Current consumption		
Mass storage		
Resolution A/D	14 bit	
System hum suppression	Digital filtering 50/60 Hz	
Test voltage input/power supply	500 V _{rms} (50/60 Hz, 1 min.)	
Degree of protection	IP65 from the front	
Ambient temperature (operation)	-20°C ... 65°C	
Housing material	Macrolon 2405	
Dimensions W/H/D	48 / 24 / 68 mm	
Control panel cutout	22(+0.6)×45(+0.8) mm	
Screw connection rigid / flexible / AWG	0.14 ... 1.5 mm² / 0.14 ... 1.5 mm² / 26 - 16	
Conformance/approvals		
Conformance	CE-compliant	
UL, USA/Canada	UL 863	

Ordering data



Description	Type	Order No.	Pcs./Pkt.
MCR process display, for measuring and displaying standard signals	MCR-SL-D-U-I	2864011	1

Accessories

MCR DIN rail adapter for digital displays in a 24 x 48 mm housing	MCR-SL-D-RA	2810081	1
---	-------------	---------	---



Displays Frequency

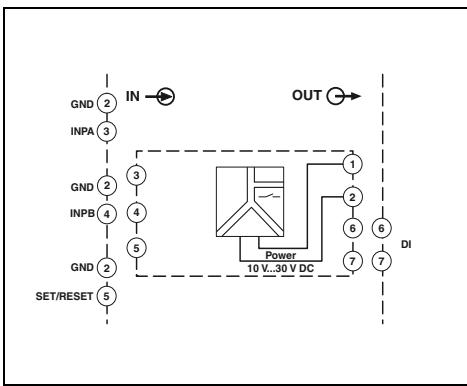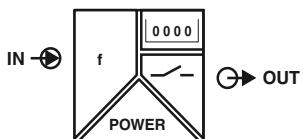

Programmable digital display
for frequencies, pulses and times



For installation in the control cabinet

- For frequency signals up to max. 60 kHz
- Configurable
- 6 positions displayed
- LED 8 mm, 7 segment
- 48 x 24 mm display

Technical data	
Input data	
Maximum input signal	60 kHz
Input resistance	10 kΩ
Switching level	4 V DC ... 30 V DC 0 V DC ... 2 V DC
Output data	1 signal ("H") 0 signal ("L")
Display	7-segment LED; 8 mm; red
Number of the displayed positions	6
Switching output	1 NPN optocoupler
Max. switching voltage	30 V DC
Maximum switching current	10 mA
General data	
Supply voltage range	10 V DC ... 30 V DC
Current consumption	max. 40 mA
Mass storage	EEPROM 1 mil. memory cycles or 10 years
Degree of protection	IP65 from the front
Ambient temperature (operation)	-20°C ... 65°C
Housing material	Macrolon 2405
Dimensions W/H/D	48 / 24 / 68 mm
Control panel cutout	22(+0.6)x45(+0.8) mm
Screw connection rigid / flexible / AWG	0.14 ... 1 mm ² / 0.14 ... 1.5 mm ² / 26 - 16
Conformance/approvals	
Conformance	CE-compliant
UL, USA/Canada	UL 863



Ordering data		
Description	Type	Order No.
MCR digital display, for measurement and display of frequencies, pulses and times	MCR-SL-D-FIT	2864024

Accessories		
MCR DIN rail adapter for digital displays in a 24 x 48 mm housing	Order No.	Pcs./Pkt.
MCR-SL-D-RA	2810081	1



Displays

Setpoint adjusters

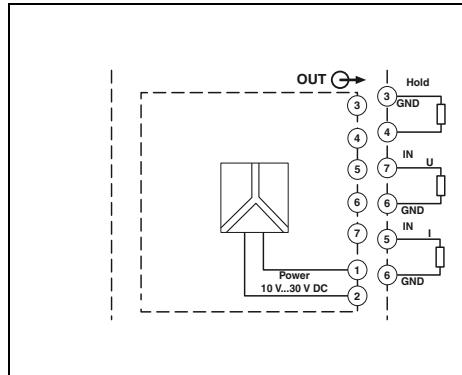

With manual and automatic ramp function

For installation in the control cabinet


- Manual setpoint definition with step width setting
- Manual setpoint definition via direct input
- Automatic setpoint definition with hold function and 20 support points
- Flexible, adjustable signal ranges of 0 to 12 V or 0 to 24 mA
- Data backup in case of a power failure
- Display value configuration
- Electrical isolation between output and supply

Input data		Technical data	
Display	7-segment, 8 mm, red		
Number of the displayed positions	4		
Switching level	1 signal ("H") 0 signal ("L")	4 V DC ... 30 V DC 0 V DC ... 2 V DC	
Output data	U output	I output	
Output signal	0 ... 12 V	0 ... 24 mA	
Length of step	10 mV	10 µA	
Load R _B	≥2 kΩ	≤500 Ω (up to 20 mA) ≤400 Ω (>20 mA)	
Ripple	≤10 mV _{PP}		
General data			
Supply voltage range	10 V DC ... 30 V DC		
Power consumption	1 W (with 24 mA/12 V)		
Maximum transmission error	<0.2% (full-scale) at rated voltage		
Test voltage output/power supply	500 V AC (50 Hz, 1 min.)		
Degree of protection	IP65 from the front		
Ambient temperature (operation)	-20°C ... 65°C		
Housing material	Macrolon 2405		
Dimensions W/H/D	48 / 24 / 68 mm		
Control panel cutout	45(+0.6)x22.2(+0.3) mm		
Screw connection rigid / flexible / AWG	0.14 ... 1.5 mm ² / 0.14 ... 1.5 mm ² / 26 - 16		
Conformance/approvals			
Conformance	CE-compliant		
UL, USA/Canada	UL 863		


Ordering data			
Description	Type	Order No.	Pcs./Pkt.
MCR digital setpoint encoder, for presetting current and voltage signals	MCR-SL-D-SPA-UI	2710314	1

Accessories		
MCR DIN rail adapter	Order No.	Pcs./Pkt.
MCR-SL-D-RA	2810081	1

Temperature, temperature head-mounted transducers

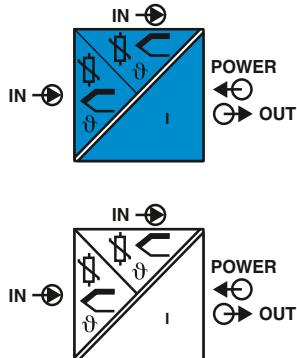

- Output loop-powered temperature head-mounted transducers
- 2 universal inputs for RTD, TC, resistance-type sensors and voltage sensors (mV), Ex ia IIC
- 4 to 20 mA output
- HART communication
- Freely configurable
- SIL 2/3
- For mounting in the connecting head, form B
- Can be installed in zone 0

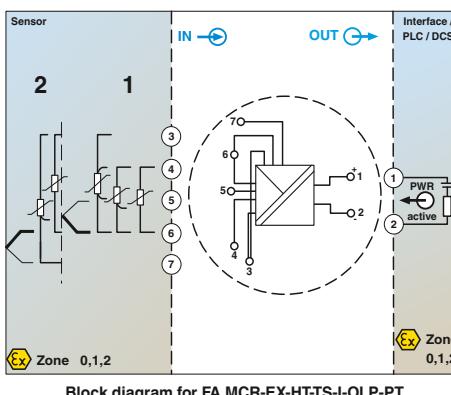

SIL
IEC 61508



Loop-powered temperature head-mounted transducer

Functional Safety
Ex: APPROVED IECEx

Technical data

Input data	Pt, Ni, Cu sensors: 2-, 3-, 4-conductor: - A, B, C, D, E, J, K, L, N, R, S, T, U 10 Ω ... 2,000 Ω (minimum measuring span: 10 Ω) -20 mV ... 100 mV	
Output data	4 ... 20 mA, HART / 20 ... 4 mA 23 mA (U _L - 11 V) / 0.023 A Approx. 10 s (HART) Approx. 28 s (measured value)	
General data	Supply voltage range Current consumption Step response (0 - 99%) Electrical isolation	
Degree of protection	IP33 (upon installation in field housing IP66/67, NEMA 4X)	
Ambient temperature (operation)	-40°C ... 85°C 0.2 ... 1.5 mm ² / 0.2 ... 1.5 mm ² / 24 - 16	
Conformance/approvals	CE-compliant II 1G Ex ia IIC T6...T4 Ga UL 61010 Recognized NI / Class I / Div. 1, 2 / Group ABCD T6/T5/T4 Exia / Class I / Group ABCD T6/T5/T4	CE-compliant II 3G Ex nA IIC T6...T4 Gc UL 61010 Recognized NI / Class I / Div. 1, 2 / Group ABCD T6/T5/T4 NI, Class I, Div. 2, Groups A, B, C, D

Ordering data



Type	Order No.	Pcs./Pkt.
FA MCR-EX-HT-TS-I-OLP-PT	2908743	1
FA MCR-HT-TS-I-OLP-PT	2908742	1

Accessories

Programming adapter for configuring modules with T-PORT interface	2309000	1
Display unit for plugging directly into the FA MCR... head-mounted transducer	2908735	1
Adapter for control cabinet installation of head-mounted transducers	2864671	1
Field housing for head-mounted transducers, with display window and two cable entries	2908736	1
Wall fastening for FA MCR-HT-FH field housing	2908737	1
Adapter cable, 1 m long, with USB connection, for HART configuration	1003824	1

Temperature, temperature transducers

new

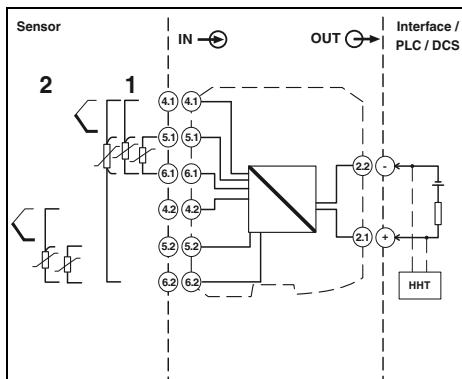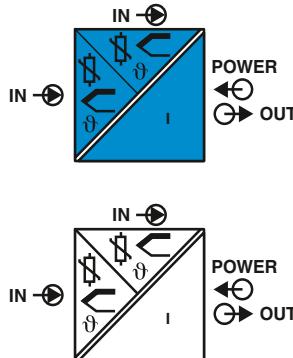

SIL
IEC 61508



Output loop-powered temperature transducer

Functional Safety

Ex: Ex

Housing width 12.5 mm

Technical data

Input data

Input signal (can be configured using DIP switches)
Input signal (can be configured using DIP switches)
Temperature range

Linear resistance measuring range

Input voltage range

Output data

Output signal

Maximum output signal

Load R_L

General data

Supply voltage range

Current consumption

Step response (0 - 99%)

Electrical isolation of input/output

Ambient temperature (operation)

Altitude

Dimensions W/H/D

Push-in connection rigid / flexible / AWG

Screw connection rigid / flexible / AWG

Conformance/approvals

Conformance

ATEX

UL, USA/Canada

FM approval

CSA

Pt, Ni, Cu sensors: 2-, 3-, 4-conductor: -
A, B, C, D, E, J, K, L, N, R, S, T, U
-250°C ... 2,500°C (range depending on the sensor type)

10 Ω ... 2,000 Ω (minimum measuring span: 10 Ω)
-20 mV ... 100 mV

4 ... 20 mA / 20 ... 4 mA
23 mA
(U_L - 11 V) / 0.023 A

12 V DC ... 42 V DC

≤23 mA

0.8 s (TC)

2 kV AC

-40°C ... 85°C

≤4,000 m (above sea level)

12.5 / 99 / 114.5 mm

0.2 ... 1.5 mm² / 0.2 ... 1.5 mm² / 24 - 16

0.2 ... 2.5 mm² / 0.2 ... 2.5 mm² / 24 - 14

CE-compliant

II 3G Ex nA IIC T6...T4 Gc

UL 61010 Recognized

NI, Class I, Div. 2,

Groups A, B, C, D

NI / Class I / Div. 2 /

ABCD T6/T5/T4

CE-compliant

II 3G Ex nA IIC T6...T4 Gc

UL 61010 Recognized

NI, Class I, Div. 2,

Groups A, B, C, D

NI / Class I / Div. 2 /

ABCD T6/T5/T4

Ordering data

Description	Type	Order No.	Pcs./Pkt.
Output loop-powered temperature transducer, for RTD, TC, resistance-type sensors and voltage sensors (mV)			
Screw connection	MACX MCR-TS-I-OLP	2908662	1
Push-in connection	MACX MCR-TS-I-OLP-SP	2908664	1
Screw connection	MACX MCR-TS-I-OLP-C	1012249	1
Screw connection	MACX MCR-EX-TS-I-OLP	2908660	1
Push-in connection	MACX MCR-EX-TS-I-OLP-SP	2908661	1

Accessories

Programming adapter for configuring modules with T-PORT interface	MCR-PAC-T-USB	2309000	1
--	----------------------	----------------	---

Field Analog – Process indicators and field devices

Order key for MACX MCR-TS-I-OLP-C output loop-powered temperature transducers (standard configuration entered as an example)

Order No.	Safety Integrity Level	Input Measuring unit	Sensor type	Connection technology	Measuring range Start	Measuring range End	Error	Output
1012249 / 1012249 ≈ MACX MCR- TS-I-OLP-C	ON ≈ SIL ON OFF ≈ SIL OFF	C ≈ Celsius F ≈ Fahrenheit O ≈ Ω V ≈ Millivolts K ≈ Kelvin R ≈ Rankine	PT100	3 2 ≈ 2-conductor 3 ≈ 3-conductor 4 ≈ 4-conductor	-200	850	MIN ≈ 3.58 mA MAX ≈ freely selectable between 21.5...23 mA	3.58 ≈ 3.58 mA Freely selectable between 21.5 ... 23 mA

Measurement range signal span of at least 10°K for RTD sensors/50°K for TC sensors

PT100 ≈ PT100 IEC 751
PT200 ≈ PT200 IEC 751
PT500 ≈ PT500 IEC 751
PT1000 ≈ PT1000 IEC 751
PT100J ≈ PT100 JIS C1604
NI100 ≈ NI100 DIN 43760
NI120 ≈ NI120 DIN 43760
NI100G ≈ NI100 OIML/GOST 6651-09
NI120G ≈ NI120 OIML/GOST 6651-09
PT50G ≈ PT50 G GOST 6651 (α=0.00391)
PT100G ≈ PT100 G GOST 6651 (α=0.00391)
CU50 ≈ CU 50 GOST (α=0.00428)
CU50G ≈ CU 50 GOST (α=0.00426)
CU100 ≈ CU 100 GOST (α=0.00428)
A1G ≈ A-1 GOST 8.585-2001
B ≈ B IEC584-1 (Pt30Rh-Pt6Rh)
C ≈ C ASTM E988
DA ≈ DA ASTM E988(2002)
E ≈ E IEC584-1 (NiCr-CuNi)
J ≈ J IEC584-1 (Fe-CuNi)
K ≈ K IEC584-1 (NiCr-Ni)
N ≈ N IEC 584-1 (NiCrSi-NiSi)
R ≈ R IEC 584-1 (Pt13Rh-Pt)
S ≈ S IEC 584-1 (Pt10Rh-Pt)
T ≈ T IEC 584-1 (Cu-CuNi)
L ≈ L DIN 43760 (Fe-CuNi)
LG ≈ LG GOST 8.585-2001
U ≈ U DIN 43760 (Cu-CuNi)
RES13 ≈ PT100 IEC751
RES14 ≈ PT100 IEC751
V11 ≈ PT100 IEC751

Field Analog accessories

Accessories for head-mounted transducers

- 2 cable entries
- Aluminum with polyester coating
- For use with head-mounted transducers
- Display window in cover



Field housing for head-mounted transducers

Technical data			
General data			
Housing material	Aluminum		
Ordering data			
Description	Type	Order No.	Pcs./Pkt.
Field housing for head-mounted transducers, with display window and two cable entries	FA MCR-HT-FH	2908736	1
Accessories			
Wall fastening for FA MCR-HT-FH field housing	FA MCR-HT-FH-WM	2908737	1
Pipe fastening for FA MCR-HT-FH field housing	FA MCR-HT-FH-PM	2908738	1

Accessories for head-mounted transducers

- For snapping onto the DIN rail
- For control cabinet installation of head-mounted transducers
- Display unit for plugging directly into FA MCR... head-mounted transducers
- Separately configurable
- Direct process value readout



Display unit for plugging directly into head-mounted transducers



Adapter for DIN rail mounting of head-mounted transducers

Ordering data			Ordering data			
Description	Type	Order No.	Pcs./Pkt.	Type	Order No.	Pcs./Pkt.
Display unit for plugging directly into the FA MCR... head-mounted transducer	FA MCR-HT-D	2908735	1			
Adapter for control cabinet installation of head-mounted transducers				MCR-DIN-RAIL-ADAPTER HT	2864671	1

Accessories for displays

new

new

- HART® communication resistor, 250 Ω, in combination with digital display FA MCR-(EX)-(F)DS-I-I-OLP
- DIN rail adapter for mounting on a 35 mm DIN rail in combination with digital display FA MCR-(EX)-D-TUI-UI-2REL-UP, FA MCR-(EX)-(F)DS-I-I-OLP
See web site for more.



HART communication resistor



DIN rail adapter for displays

Description	Ordering data			Ordering data		
	Type	Order No.	Pcs./Pkt.	Type	Order No.	Pcs./Pkt.
HART communication resistor	FA MCR-FDS-R250	2908802	1			
DIN rail adapters for displays				FA MCR-D-RM	1032996	1

Accessories

Programming adapters

- Programming adapters with USB and T port interface, 2.4 m for programming FA MCR-..., MCR-...-LP-..., and MCR-...-HT-... modules
- HART USB modem for configuring MACX MCR-TS-I-OLP-..., MACX MCR-EX-TS-I-OLP-..., FA MCR-HTTS-I-OLP-... and FA MCR-EX-HT-TS-I-OLP-... using the HART protocol



Programming adapter



HART USB MODEM

Description	Ordering data			Ordering data		
	Type	Order No.	Pcs./Pkt.	Type	Order No.	Pcs./Pkt.
Programming adapter for configuring modules with T-PORT interface	MCR-PAC-T-USB	2309000	1			
HART USB modem, for configuring modules with HART communication				GW HART USB MODEM	1003824	1

For up-to-date modifications or supplements
to the catalog contents, please visit:
phoenixcontact.net/webcode/#0132

